
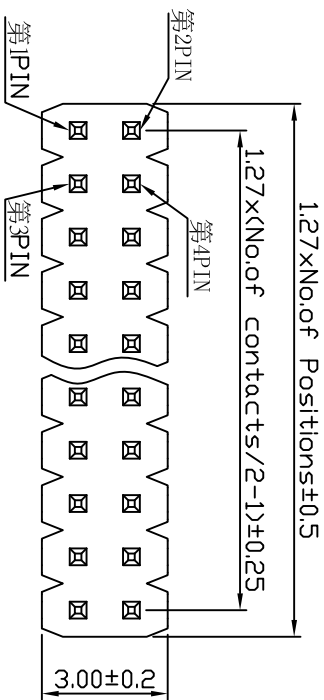


P. C. B Hole Layout

## Specifications

|                         |                       |
|-------------------------|-----------------------|
| Current Rating          | : 1 Amp               |
| Insulator Resistance    | : 1000 Megohms Min.   |
| Dielectric Withstanding | : AC 500 V            |
| Operating Temperature   | : -40°C ~ +105°C      |
| Contact Material        | : Copper Alloy        |
| Insulator Material      | : Polyester, UL 94V-0 |
| Standard Finish         | : Nylon-6T            |
| Standard                | : Gold Plated         |
|                         | : Gold Flash all over |

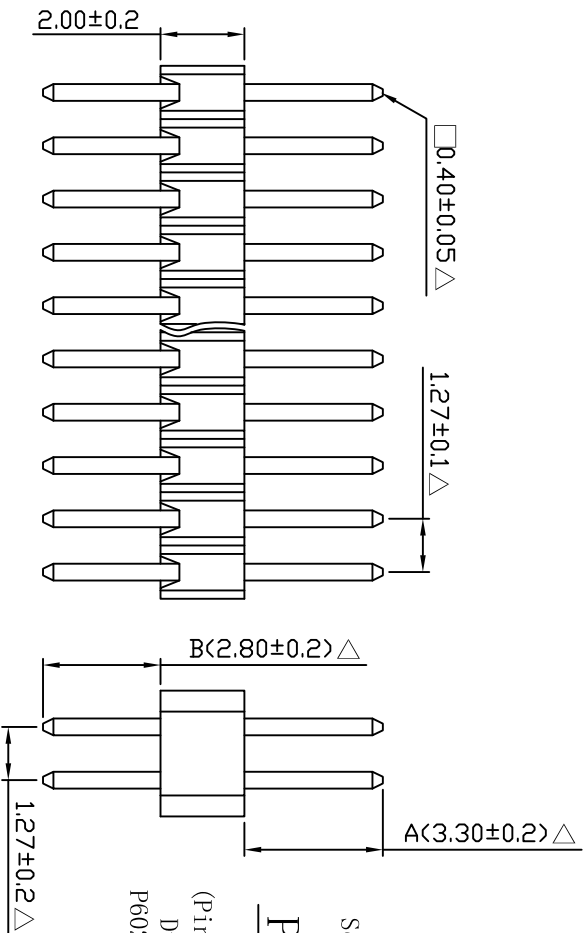

|                       |                                                         |                                                               |                              |                                                                    |                      |
|-----------------------|---------------------------------------------------------|---------------------------------------------------------------|------------------------------|--------------------------------------------------------------------|----------------------|
| Series                | Connector Type                                          | Contact Plating                                               | Material                     | Pin Length mm                                                      | Number of Contacts   |
| P602                  | - X                                                     | X                                                             | X                            | - A / B -                                                          | X X                  |
| (Pin Header Dual Row) | S: Straight Type<br>T: Tin Plated<br>P602 (H:2.0 W:3.0) | G: Gold Flash<br>A: 10U" Gold<br>B: 15U" Gold<br>C: 20U" Gold | N: Nylon-6T<br>(Standard: N) | A (033)<br>B (028)                                                 | (04 TO 100 Contacts) |
|                       |                                                         | ©Duplex Plating<br>D: Gold Flash/Tin (Standard: G)            |                              | (If you desire on other length, by marking put desired in the A/B) |                      |

### DESCRIPTION(内容):

1.27mm Pin Header H:2.0 180° □=0.40  
Nylon-6T (環保材料)

### DRAWN(製圖):

王建平

### CHECKED(確認):

王建平

### GENERAL TOLERANCE:

(公差)

.X .XXX  
.XX .XXX  
.XX° .XX°

### APPROVAL(核准):

王建平

SCALE(比例):  
1:XX

PART NO:

P602-SGN-033/028-XX

DWG NO(圖號):

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09