

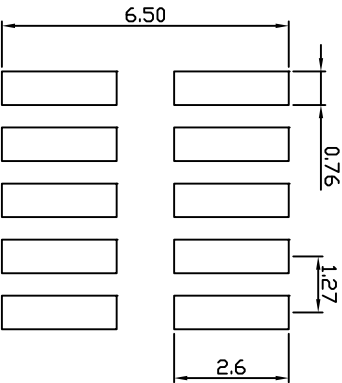
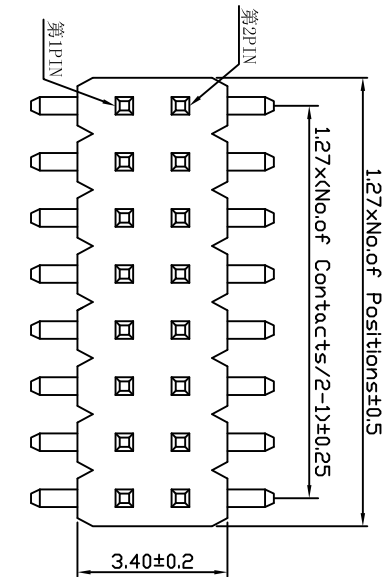


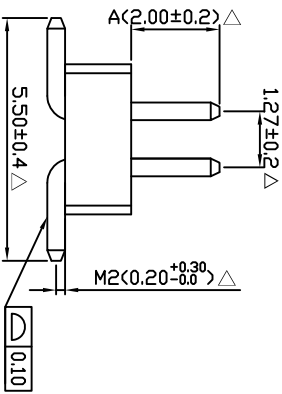

P. C. B. Hold Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T/LCP
Finish	: Gold Plated
Standard	: Gold Flash all over

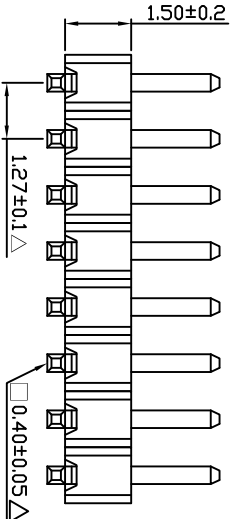

Series	Connector	Contact	Material	Pin Length	mm	Number of
P604	X	X	X	A	-	X X
(Pin Header Dual Row)	M: SMT Type M2: 0.20mm	G: Gold Flash T: Tin Plated A: 100"Gold B: 150"Gold C: 200"Gold	N: Nylon-6T C: LCP (Standard: N)	A	(020)	(04 TO 100 Contacts)
P604 (H: 1.5mm 開5.5)	:	©Duplex Plating D: Gold Flash/Tin (Standard: G)				(If you desire on other length, by marking put desired in the A)

DESCRIPTION(内容)		DRAWN(製圖)		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.27mm Pin Header H:1.5 SMT □=0.40 (RoHS)		黄炳秋		(公差)		A/1	1	△此符号表示重點管控尺寸	2020.07.02
PART NO: P604-M2G_-020-XX (料號)		CHECKED(確認):		X. ±0.30 X. ° ±5.0°		UNIT: mm	2		
DWG NO(圖號):		APPROVAL(核准):		.XX ±0.15 .XX ±1.0°		SIZE: A4	3		
				SCALE(比例): 1:XX		SHEET 1/1	4		

东莞华连电子有限公司

A


B

C

D

E

FILE NO: CWJ-4E-09



(產品)

Part No:	
Description:	
Quantity:	
Date:	

料號

品名規格



數量

日期

PIN數	包材名稱	每管數量
2*2	PE15-15+V017	1000PCS
2*4	P006-1	62PCS
2*5	P006-1	49PCS
2*7	P006-1	35PCS
2*10	P006-1	24PCS


TPR白色軟膠塞

(真空管)

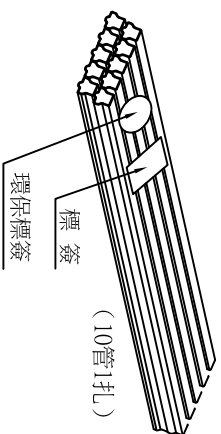

(10管1扎)

(160扎/箱)

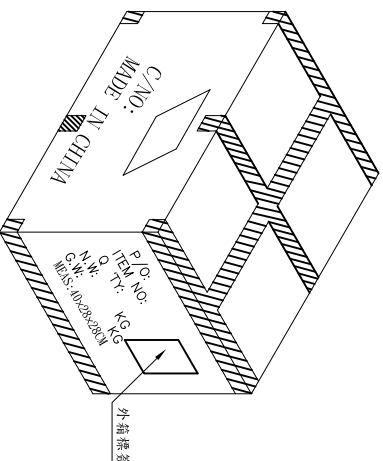

外箱標籤

- 1.真空管規格：325x6.9x7.2mm
- 2.外箱規格：40x28x30cm (單重:620g)
- 3.注未夠一整箱,請酌量選箱進行包裝

DESCRIPTION(內容):

1.27mm Pin Header H:1.5 SMT □=0.40
(RoHS)

DRAWN(製圖):
黃炳秋

CHECKED(確認):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

REV:
A/1

REV

DESCRIPTION

DATE

UNIT:

SIZE:

2022.03.03

A4

3

4

PART NO:
P604-M2G_-020-XX(包裝圖)

APPROVAL(核准):

SCALE(比例):
1:XX



SHEET:
1/1

4

东莞华连电子有限公司