
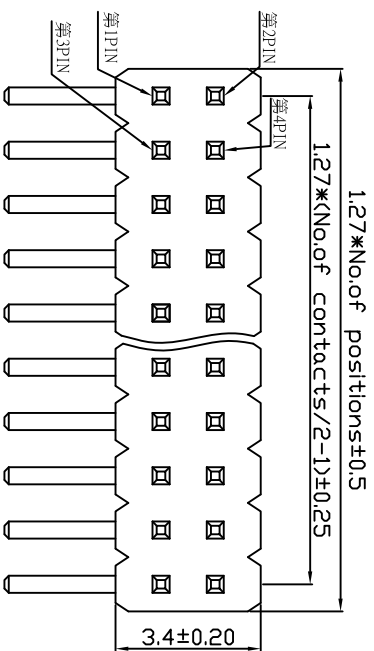


P.C.B Hole Layout

Specifications



Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

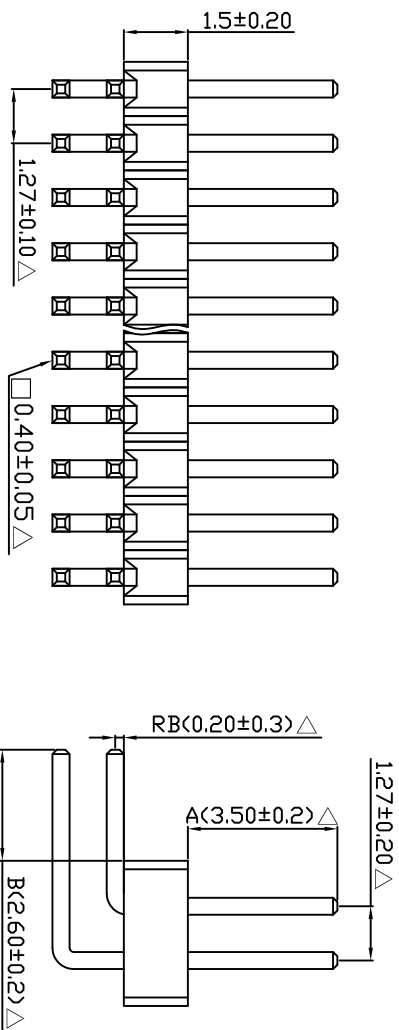


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P604	X	X	X	A / B	X X
(Pin header Dual Row)	R: Right Angle Type T: Tip Plated (Down Angle Type)	G: Gold Flash N: Nylon-6T P: PBT A: 100"Gold B: 150"Gold C: 200"Gold D: duplex Plating (Standard: G)	N: Nylon-6T P: PBT A: 100"Gold B: 150"Gold C: 10P (Standard: N)	A (035) B (026)	(04 To 100 Contacts)
P604 (H: 1.5 W: 3.4)	RB: 0.2mm			(If you desire on other length, by marking put desired in the A/B)	

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:1.5 90° □=0.40 (ROHS)		鄧文廣		(公差)		A/1				
PART NO: P604-RBG_-035/026-XX		CHECKED(確認):		X. ±0.30	X.° ±5.0°	UNIT: mm	1	△此符號表示重點管控尺寸		2021.04.09
DWG NO(圖號):		APPROVAL(核准):		.X. ±0.20	.X.° ±4.0°	SIZE: A4	2			
		SCALE(比例):		.XX ±0.15	.XX° ±1.0°	SHEET 1/1	3			
				1:XX			4			



东莞华连电子有限公司

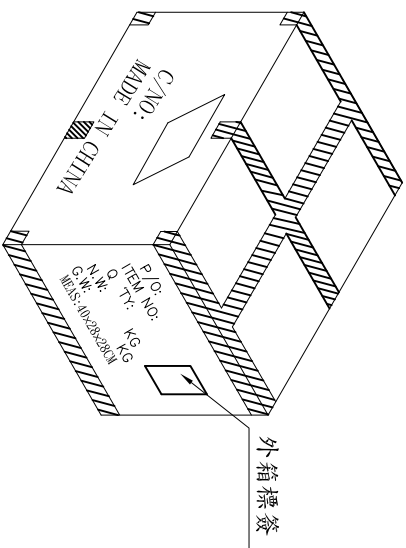



(產品)



Part No:		料號
Description:		品名規格
Quantity:		數量
Date:		日期



(PE袋)

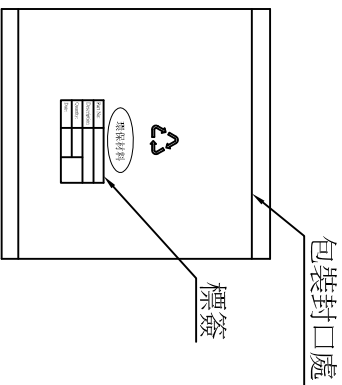

1. 纸箱规格: 400*280*280mm (單重: 620g).
2. 当为零数出货时以塑胶袋包装再装至最小箱.
3. 封箱方式(看上图所示): 外箱四周使用透明的封箱胶带封住, 并封成王字型.

PIN數	包材規格	每袋數量	包裝方式
2*12	15X15	500/PCS	散裝
2*14	15X15	500/PCS	散裝
2*18	18X20	500/PCS	散裝

DESCRIPTION(內容): 1.27mm Pin Header H:1.5 90° □=0.40 (環保材料)		DRAWN(製圖): 黃炳秋		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
PART NO: (料號) P604-RBG_-035/026-XX(包裝圖)		CHECKED(確認):		.X .XX .XXX	.XXX .X° .XX°	UNIT:	1		2011.08.24
DWG NO(圖號):		APPROVAL(核准):		SCALE(比例): 1:XX		SIZE: A4	2		
						SHEET: 1/1	3		
							4		

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09