
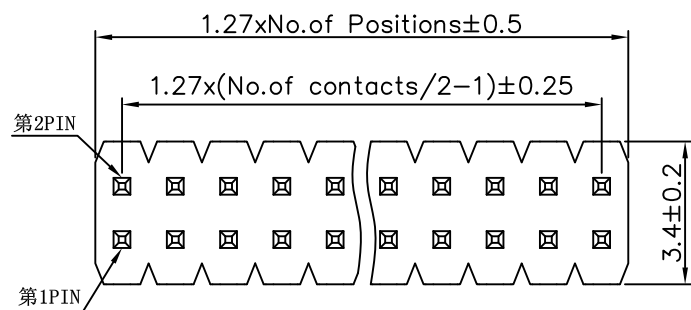


Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester,UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

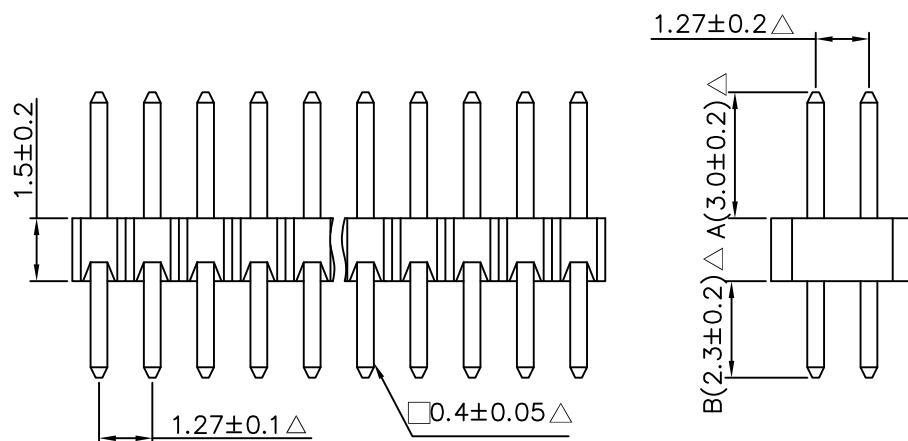

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P604</u>	<u>X</u>	<u>X</u>	<u>X</u>	<u>A / B</u>	<u>X X</u>
(Pin Header Single Row) P604(H:1.5 W:3.4)	S: Straight Type ...	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T C: LCP (Standard:N)	A (030) B (023) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

东莞华连电子有限公司

DESCRIPTION(内容):

1.27mm Pin Header H:1.5 180° □=0.40
(RoHS)

PART NO:
(料 號)

P604-SG_-030/023-XX

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

APPROVAL(核准):


GENERAL TOLERANCE:

(公差)

X.	±0.30	X.°	±5.0°
.X	±0.20	.X°	±3.0°
.XX	±0.15	.XX°	±1.0°

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3


4

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2017.12.28

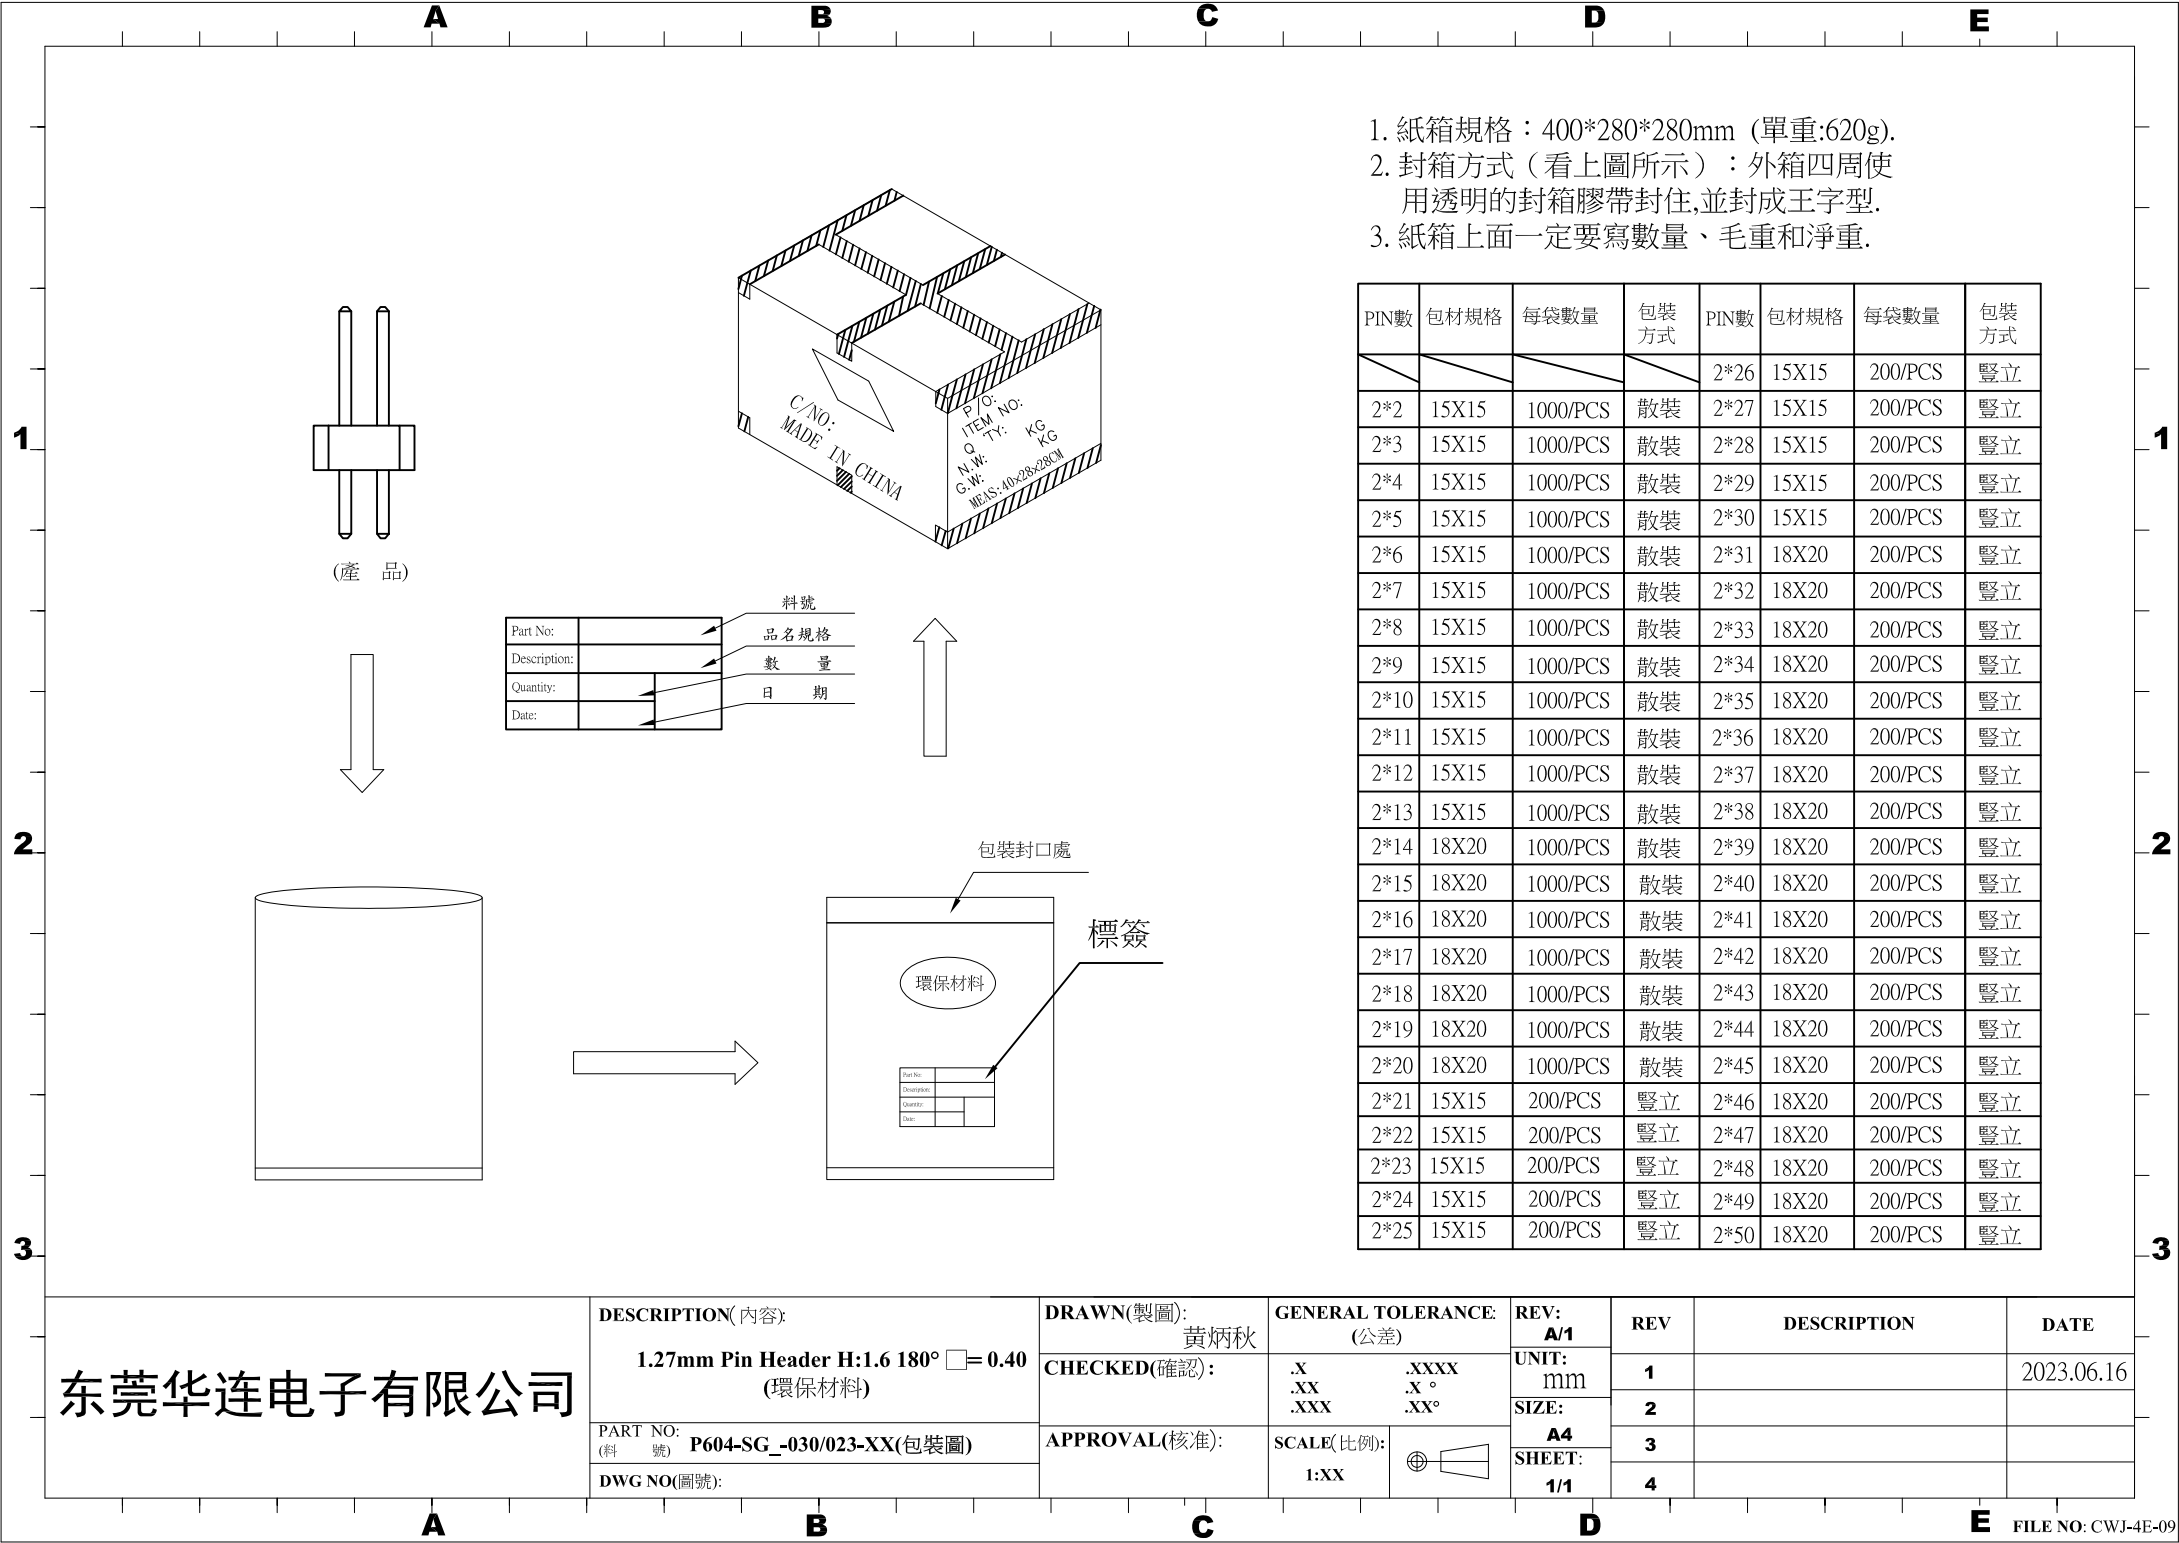

- 1. 紙箱規格：400*280*280mm (單重:620g).
- 2. 封箱方式（看上圖所示）：外箱四周使用透明的封箱膠帶封住,並封成王字型.
- 3. 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材規格	每袋數量	包裝方式	PIN數	包材規格	每袋數量	包裝方式
2*2	15X15	1000/PCS	散裝	2*26	15X15	200/PCS	豎立
2*3	15X15	1000/PCS	散裝	2*27	15X15	200/PCS	豎立
2*4	15X15	1000/PCS	散裝	2*28	15X15	200/PCS	豎立
2*5	15X15	1000/PCS	散裝	2*29	15X15	200/PCS	豎立
2*6	15X15	1000/PCS	散裝	2*30	15X15	200/PCS	豎立
2*7	15X15	1000/PCS	散裝	2*31	18X20	200/PCS	豎立
2*8	15X15	1000/PCS	散裝	2*32	18X20	200/PCS	豎立
2*9	15X15	1000/PCS	散裝	2*33	18X20	200/PCS	豎立
2*10	15X15	1000/PCS	散裝	2*34	18X20	200/PCS	豎立
2*11	15X15	1000/PCS	散裝	2*35	18X20	200/PCS	豎立
2*12	15X15	1000/PCS	散裝	2*36	18X20	200/PCS	豎立
2*13	15X15	1000/PCS	散裝	2*37	18X20	200/PCS	豎立
2*14	18X20	1000/PCS	散裝	2*38	18X20	200/PCS	豎立
2*15	18X20	1000/PCS	散裝	2*39	18X20	200/PCS	豎立
2*16	18X20	1000/PCS	散裝	2*40	18X20	200/PCS	豎立
2*17	18X20	1000/PCS	散裝	2*41	18X20	200/PCS	豎立
2*18	18X20	1000/PCS	散裝	2*42	18X20	200/PCS	豎立
2*19	18X20	1000/PCS	散裝	2*43	18X20	200/PCS	豎立
2*20	18X20	1000/PCS	散裝	2*44	18X20	200/PCS	豎立
2*21	15X15	200/PCS	豎立	2*45	18X20	200/PCS	豎立
2*22	15X15	200/PCS	豎立	2*46	18X20	200/PCS	豎立
2*23	15X15	200/PCS	豎立	2*47	18X20	200/PCS	豎立
2*24	15X15	200/PCS	豎立	2*48	18X20	200/PCS	豎立
2*25	15X15	200/PCS	豎立	2*49	18X20	200/PCS	豎立
				2*50	18X20	200/PCS	豎立

东莞华连电子有限公司

DESCRIPTION(内容):
1.27mm Pin Header H:1.6 180° □=0.40
(環保材料)
PART NO:
(料 號) P604-SG_-030/023-XX(包裝圖)
DWG NO(圖號):

DRAWN(製圖):
黄炳秋
CHECKED(確認):
APPROVAL(核准):

GENERAL TOLERANCE:
(公差)
.X .XXXX
.XX .X °
.XXX .XX°
SCALE(比例):
1:XX

REV:
A/1
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV	DESCRIPTION	DATE
1		2023.06.16
2		
3		
4		