
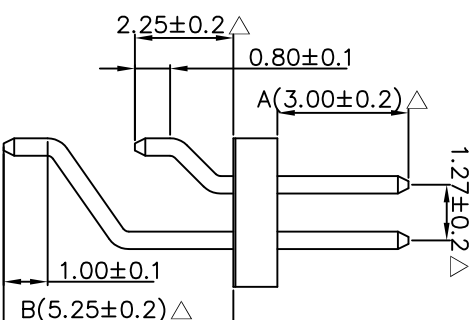


P. C. B Hole Layout

### Specifications

|                         |                       |
|-------------------------|-----------------------|
| Current Rating          | : 1 Amp               |
| Insulator Resistance    | : 1000 Megohms Min.   |
| Dielectric Withstanding | : AC 500 V            |
| Operating Temperature   | : -40°C ~ +105°C      |
| Contact Material        | : Copper Alloy        |
| Insulator Material      | : Polyester, UL 94V-0 |
| Standard                | : Nylon-6T            |
| Finish                  | : Gold Plated         |
| Standard                | : Gold Flash all over |

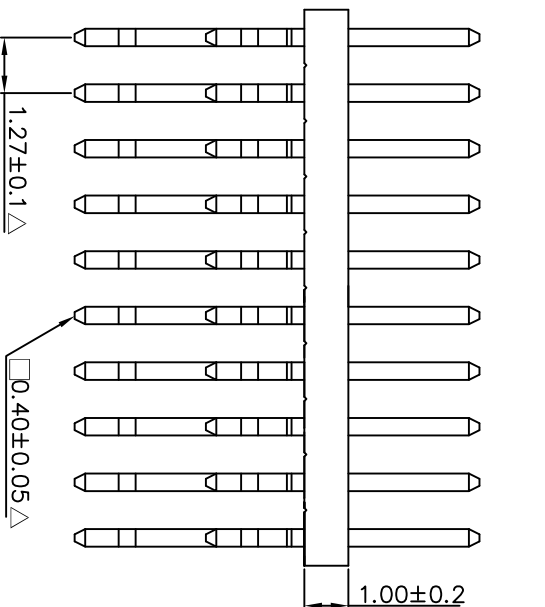

| Series                | Connector Type                  | Contact Plating | Material             | Pin Length mm                                                      | Number of Contacts  | Other  |
|-----------------------|---------------------------------|-----------------|----------------------|--------------------------------------------------------------------|---------------------|--------|
| P605                  | -                               | X               | X                    | A / B                                                              | X X                 | SP     |
| (Pin Header Dual Row) | K: "K" Type                     | G: Gold Flash   | N: Nylon-6T          | A (030)                                                            | (06 TO 30 Contacts) | SP: 水平 |
| P605 (H: 1.0 W: 3.4)  | T: Tin Plated                   | A: 100" Gold    | C: ICP (Standard: N) | B (053)                                                            |                     | 塑胶     |
|                       | B: 150" Gold                    | C: 200" Gold    | © Duplex Plating     | (If you desire on other length, by marking put desired in the A/B) |                     |        |
|                       | D: Gold Flash/Tin (Standard: G) |                 |                      |                                                                    |                     |        |

DESCRIPTION(内容):

1.27mm Pin Header H:1.0 □ ±0.40  
水平塑胶 卧式 (Rohs)

DRAWN(製圖): 黄炳秋

CHECKED(確認):

GENERAL TOLERANCE:  
(公差)

REV: A/1

REV

DESCRIPTION

DATE

△此符号表示重點管控尺寸

2014.04.22

PART NO: P605-KG\_-030/053-XX-SP

料號: P605-KG\_-030/053-XX-SP

APPROVAL(核准):

SCALE(比例): 1:XX



SHEET: A4

3

东莞华连电子有限公司

A


B

C


D

E


FILE NO: CWJ-4E-09



(產品)





(PE袋15\*15)




(V017真空盒)


內標籤

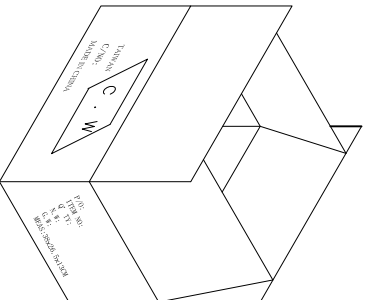

(V017: 27盒裝1內箱,裝三層)

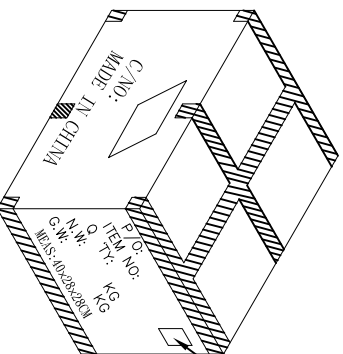

外箱標籤



(2內箱裝1外箱)

|              |  |
|--------------|--|
| Part No:     |  |
| Description: |  |
| Quantity:    |  |
| Date:        |  |

內標籤

料號

品名規格

數量

日期

| PIN數 | 包材規格         | 每袋數量     | 包裝方式 |
|------|--------------|----------|------|
| 2*2  | V017+PE15X15 | 1000/PCS | 散裝   |
| 2*3  | V017+PE15X15 | 1000/PCS | 散裝   |

1. 紙箱規格: 外箱40\*28\*28cm (單重: 620g)  
內箱規格: 38\*26.5\*13cm (單重: 280g).
2. 當為零數出貨時以塑膠袋包裝再裝至最小箱.
3. 封箱方式(看上图所示): 外箱四周使用透明的封箱膠帶封住, 并封成王字型.

DESCRIPTION(內容):

1.27mm Pin Header H:1.0 □=0.40  
Nylon-6T 臥貼式 (環保材料)

DRAWN(製圖):

黃炳秋

CHECKED(確認):

GENERAL TOLERANCE:

(公差)

.X .XXXX  
.XX .X°  
.XXX .XX°

REV:

A/1

REV

1

DESCRIPTION

DATE

2014. 04. 22

UNIT:

1

SIZE:

2

A4

3

SHEET:

4

1/1

REV:

A/1

REV

1

DESCRIPTION

DATE

2014. 04. 22

UNIT:

1

SIZE:

2

A4

3

SHEET:

4

1/1

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09