

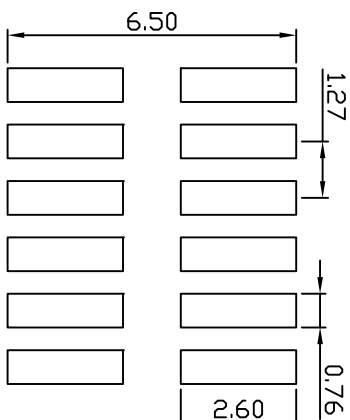


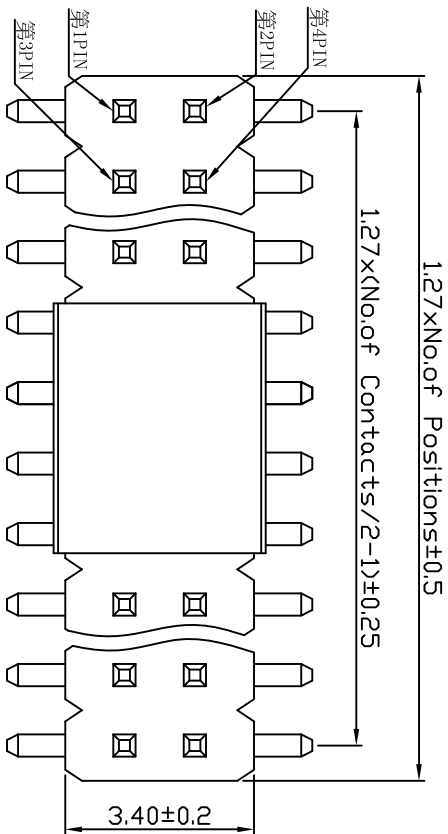

P. C. B. Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C tor 3~5s Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
Standard	: Gold Flash all over

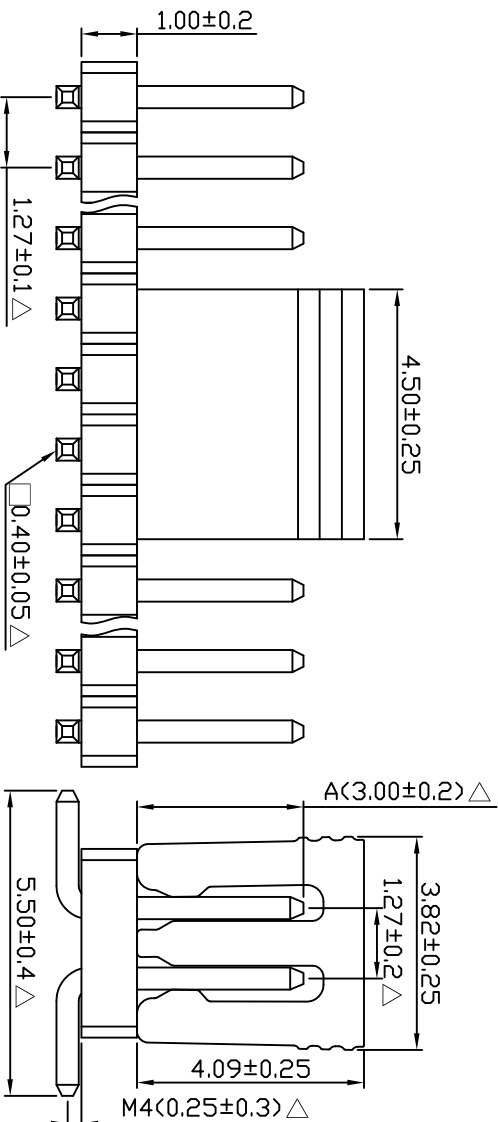

Series	Connector Type	Contact Plating	Material	Pin Length	mm	Number of Contacts	Other
P605	-	X	X	-	A	X	- RC
(Pin Header Dual Row)	M: SMT Type M4: 0.25mm	6: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold	N: Nylon-6T C: LCP (Standard: N)	A (030)	(04 TO 100 Contacts)	R: REEL C: Cap	
P605 (H: 1.0 W: 3.4 展開5.5)	:	©Duplex Plating D: Gold Flash/Tin (Standard: G)		(If you desire on other length, by marking put desired in the A)			

DESCRIPTION(内容):

1.27mm Pin Header H:1.0 SMT □=0.40
REEL+CAP (RoHS)

DRAWN(製圖):

鄧文廣

CHECKED(確認):

黃炳秋

GENERAL TOLERANCE:

(公差)

X. ±0.30	X.° ±5.0°
.X. ±0.20	.X.° ±4.0°
.XX ±0.15	.XX° ±1.0°

REV:

A/1

REV

1

DESCRIPTION

△此符號表示重點管控尺寸

DATE

2019.04.19

PART NO:

P605-M4G_-030-XX-RC

(料號)

DWG NO(圖號):

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09



收料方向
GATHER MATERIAL DIRECTION



客戶放料方向
INPUT MATERIAL DIRECTION




成品

每卷裝900PCS
R350-06

(箱規格:340*340*290)

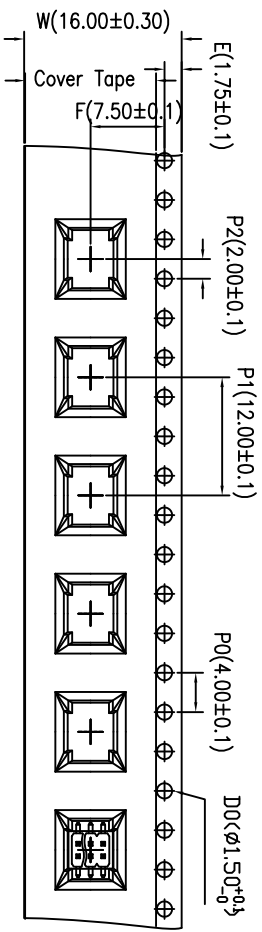


裁帶卷料方向



Notes:

- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
(每10个链轮穿孔累计公差为 $\pm 0.20\text{mm}$)
- 2.Carrier camber not to exceed 1mm in 250mm .
(传送料带弯曲变形每250MM不超过1MM)
- 3.A and B measured on a plane 0.3mm above the bottom of the pocket.
- 4.K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
(K0为口袋底部与材料表面的平面距离。)
- 5.All dimensions meet EIA-481-D requirements.
(所有尺寸符合EIA-481-D标准要求。)
- 6.Material: Black Conductive Polystyrene.
(材料:黑色聚苯乙烯。)
- 7.Thickness: $0.5 \pm 0.05\text{mm}$.
(厚度: $0.5 \pm 0.05\text{毫米}$ 。)
- 8.Packing length per 13" reel :11.232Meters.
(每个13"卷轴包装长度为11.232米。)
- 9.Component loader per 13" reel : 900 pcs.
(每个13"卷轴可装900个零件。 117模936穴)



每箱裝14卷共12600PCS

裝好成品之外箱

注: 未注明公差为 ± 0.1 ;
F值以B0为中心;
P2值以A0为中心.

东莞华连电子有限公司

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:1.0 SMT □=0.40 CAP+REELPACK (RoHS)		鄧文廣		(公差)		A/1	1			2021.06.03
PART NO: (料號) P605-W4G_-030-06-RC(包裝圖)		CHECKED(確認):		.x ±0.30 .xx ±0.20 .xxx±0.10		UNIT: mm	2			
DWG NO(圖號):		APPROVAL(核准):		SCALE(比例):		SHEET: 1/1	3			
				1:XX			4			

A

B

C

D

E

FILE NO: CWJ-4E-09