
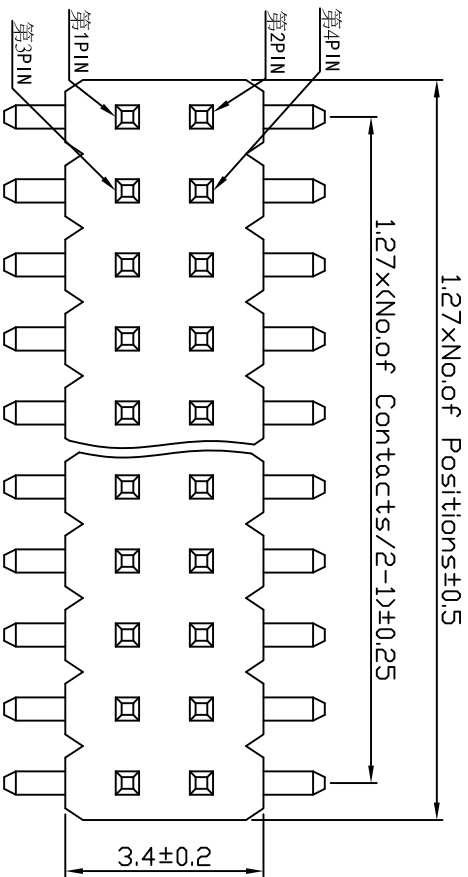


P. C. B. Hold Layout

Specifications


Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Max Processing Temp	: 230°C for 60 seconds
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

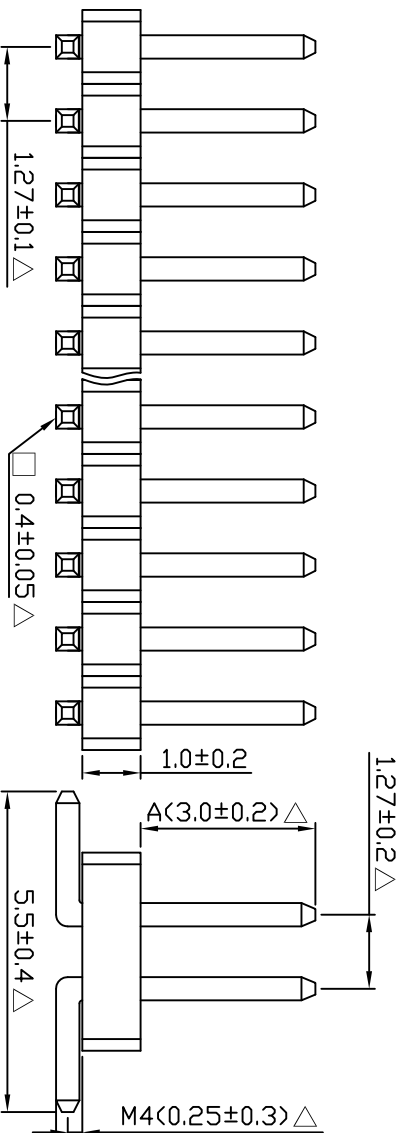



Series	Connector Type	Contact Plating	Material Pin Length	Number of Contacts
P605	X	X	X - A -	X X
(Pin Header Dual Row)	M: SMT Type M4: 0.25mm :	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: C)	N: Nylon-6T (Standard: N) (If you desire on other length, by marking put desired in the A)	(04 TO 100 Contacts)

DESCRIPTION(内容)		DRAWN(製圖)		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.27mm Pin Header H:1.0 SMT □=0.40 (RoHS)		CHECKED(確認): 鄧文廣		X. ±0.30 .XX ±0.15	X.° ±5.0° .XX° ±4.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2017.04.07
PART NO: P605-M4G_-030-XX (料號)		APPROVAL(核准): 黃炳秋		SCALE(比例): 1:XX		SHEET A4	2		
DWG NO(圖號): RDA170407-002		鄧文廣				1/1	3		
							4		



东莞华连电子有限公司



(產品)

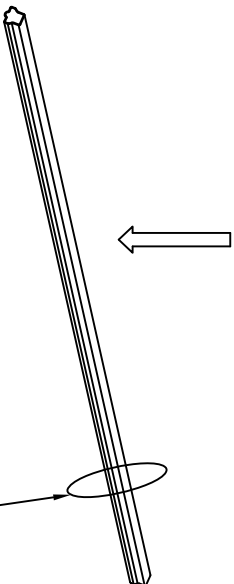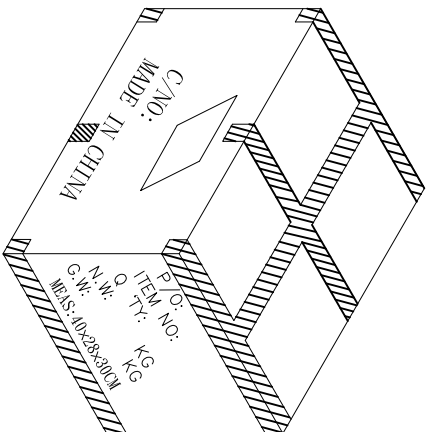

(P006-1真空管)

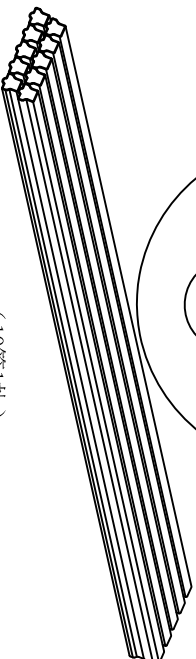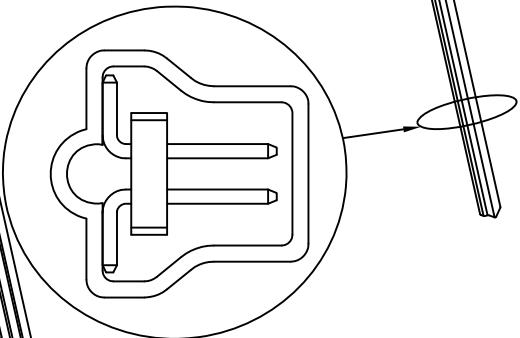

(10管1扎)

- 1.真空管規格：325x6.9x7.2mm
- 2.外箱規格：400x280x300mm
- 3.末夠一箱請酌量選箱進行包裝

PIN數	包材名稱	每管數量	PIN數	包材名稱	每管數量
			2*21	P006-1	11/PCS
2*2	PE袋+V017	1000/PCS	2*22	P006-1	10/PCS
2*3	PE袋+V017	1000/PCS	2*23	P006-1	10/PCS
2*4	PE袋+V017	1000/PCS	2*24	P006-1	9/PCS
2*5	PE袋+V017	1000/PCS	2*25	P006-1	9/PCS
2*6	P006-1	40/PCS	2*26	P006-1	9/PCS
2*7	P006-1	35/PCS	2*27	P006-1	9/PCS
2*8	P006-1	30/PCS	2*28	P006-1	8/PCS
2*9	P006-1	27/PCS	2*29	P006-1	8/PCS
2*10	P006-1	24/PCS	2*30	P006-1	8/PCS
2*11	P006-1	22/PCS	2*31	P006-1	7/PCS
2*12	P006-1	20/PCS	2*32	P006-1	7/PCS
2*13	P006-1	18/PCS	2*33	P006-1	7/PCS
2*14	P006-1	17/PCS	2*34	P006-1	7/PCS
2*15	P006-1	16/PCS	2*35	P006-1	7/PCS
2*16	P006-1	15/PCS	2*36	P006-1	6/PCS
2*17	P006-1	14/PCS	2*37	P006-1	6/PCS
2*18	P006-1	13/PCS	2*38	P006-1	6/PCS
2*19	P006-1	12/PCS	2*39	P006-1	6/PCS
2*20	P006-1	12/PCS	2*40	P006-1	6/PCS

DESCRIPTION(內容): 1.27mm Pin Header H:1.0 SMT ☐ =0.40 (RoHS)		DRAWN(製圖): 黃炳秋		GENERAL TOLERANCE: (公差)		REV: A/2		REV		DESCRIPTION		DATE	
CHECKED(確認):		SCALE(比例): 1:XX		UNIT: .XXX .XXX .XXX		SIZE: A4		1		修改2*5PIN包裝數量		2013.05.17	
APPROVAL(核准):		SCALE(比例): 1:XX		UNIT: .XXX .XXX .XXX		SHEET: 1/1		3				2023.07.14	
PART NO: P605-M4G_-030-XX(包裝圖)		SCALE(比例): 1:XX		UNIT: .XXX .XXX .XXX		SHEET: 1/1		4					
DWG NO(圖號):		SCALE(比例): 1:XX		UNIT: .XXX .XXX .XXX		SHEET: 1/1		4					

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09