
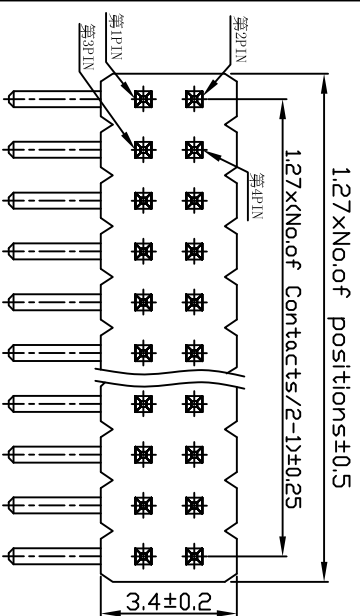


P.C.B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40° C ~ +105° C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

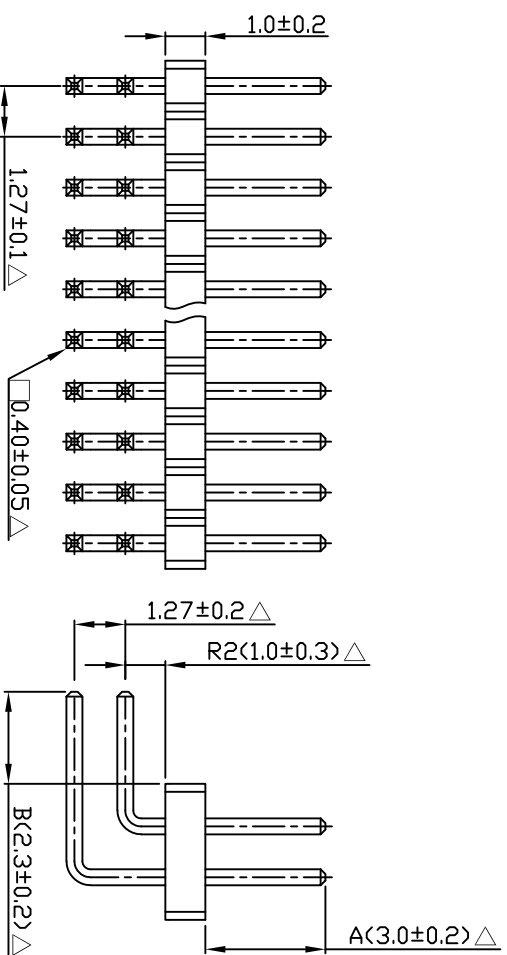

Series
P605
—
(Pin Header
Dual Row)
P605(H:1.0 W:3.0)

Connector
TypeContact
Plating

Material

in Length mm

Number of
Contacts

R:Right Angle
R2:1.0mm
4) ...

	N: Nylon-6T
G: Gold Flash	
T: Tin Plated	(Standard: N
A: 10U" Gold	
B: 15U" Gold	

©Duplex Plating
D:Gold Flash/Tin
(Standard:G)

A	B	
(030)	(023)	(04 70 100 Contacts)

(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):		DRAWN(製圖): 方婷		GENERAL TOLERANCE: (公差)		REV: A/1		REV		DESCRIPTION		DATE	
1.27mm Pin Header H:1.0 90° □ = 0.40 Nylon-6T (環保材料)		CHECKED(確認):		.X		UNIT:		1		△此符號表示重點管控尺寸		2011.03.24	
				.XX		mm							
				.XXX		SIZE:							
PART NO: (料 號): P605-R2GN-030/023-XX		APPROVAL(核准):		SCALE(比例): 1:XX		A4		3					
DWG NO(圖號):						SHEET: 1/1		4					

东莞华连电子有限公司