


P.C.B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

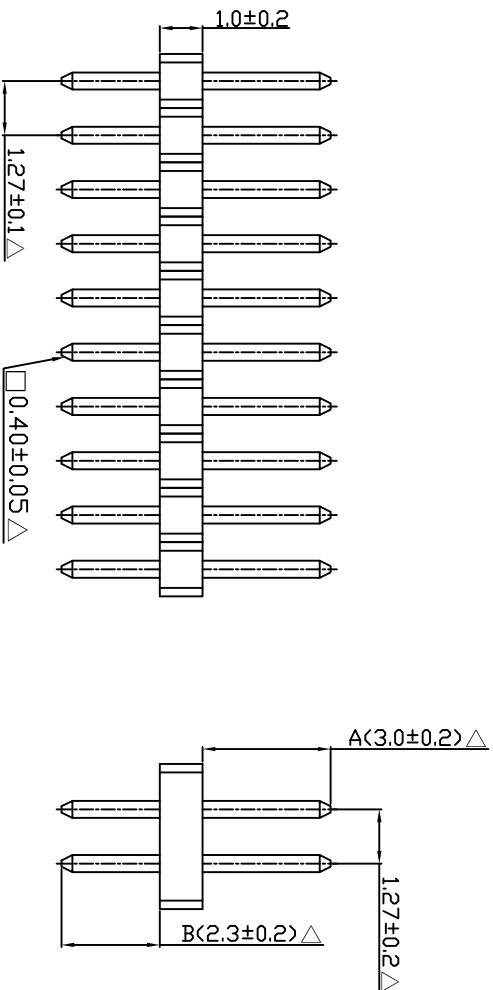


Series	P605	Connector Type	X	Contact Plating	X	Material	X	Pin Length	A / B	Number of Contacts	X / X
(Pin Header Dual Row)		S:Staright Type	⋮	G:Gold Flash		N:NY-6T		A	B	(04 TO 100 Contacts)	
P605 (H:1.0 W:3.4)				A:100"Gold		C:LCP		(030)	(023)		
				B:150"Gold							
				C:20U"Gold							
				©Duplex Plating							
				D:Gold Flash/Tin							
				(Standard:G)							


(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):		DRAWN(製圖): 黃炳秋		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.27mm Pin Header H:1.0 180° □=0.40 (RoHS)		CHECKED(確認):	X. ±0.30 X. ° ±5.0° .X. ±0.20 X. ° ±3.0° .XX ±0.15 .XX° ±1.0°		UNIT: mm	1	△	此符號表示重點管控尺寸	2021.12.29
PART NO: P605-SG_-030/023-XX (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE:		A4	2			
DWG NO(圖號):					SHEET 1/1	3			
						4			




东莞华连电子有限公司



(產品)




(2內箱裝1外箱)

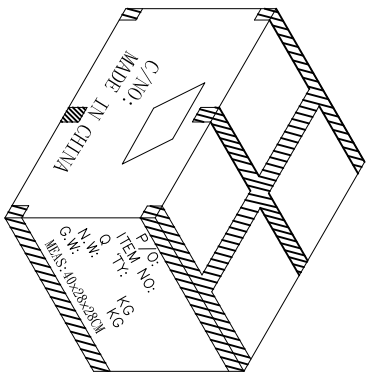

包裝封口處

標籤



(內箱規格:38*26.5*13cm)

1. 紙箱規格： 外箱400*280*280mm (單重:620g).
內箱 380*265*130mm (單重:280g).
2. 封箱方式 (看上圖所示)： 外箱四周使用透明的封箱膠帶封住,並封成王字型.
3. 紙箱上面一定要寫數量、毛重和淨重.

PIN數	PE袋規格	每袋數量	包裝方式	PIN數	PE袋規格	每袋數量	包裝方式
2*2	15X15	3000/PCS	散裝	2*26	15X15	200/PCS	散裝
2*3	15X15	2000/PCS	散裝	2*27	15X15	200/PCS	散裝
2*4	15X15	2000/PCS	散裝	2*28	15X15	200/PCS	散裝
2*5	15X15	1000/PCS	散裝	2*29	15X15	200/PCS	散裝
2*6	15X15	1000/PCS	散裝	2*30	15X15	200/PCS	散裝
2*7	15X15	1000/PCS	散裝	2*31	15X18	200/PCS	豎立
2*8	15X15	1000/PCS	散裝	2*32	15X18	200/PCS	豎立
2*9	15X18	1000/PCS	散裝	2*33	15X18	200/PCS	豎立
2*10	15X18	1000/PCS	散裝	2*34	15X18	200/PCS	豎立
2*11	15X18	1000/PCS	散裝	2*35	15X18	200/PCS	豎立
2*12	15X18	1000/PCS	散裝	2*36	15X18	200/PCS	豎立
2*13	18X20	1000/PCS	散裝	2*37	15X18	200/PCS	豎立
2*14	18X20	1000/PCS	散裝	2*38	15X18	200/PCS	豎立
2*15	18X20	1000/PCS	散裝	2*39	15X18	200/PCS	豎立
2*16	18X20	1000/PCS	散裝	2*40	15X18	200/PCS	豎立
2*17	15X15	500/PCS	散裝	2*41	18X20	200/PCS	豎立
2*18	15X15	500/PCS	散裝	2*42	18X20	200/PCS	豎立
2*19	15X15	500/PCS	散裝	2*43	18X20	200/PCS	豎立
2*20	15X15	500/PCS	散裝	2*44	18X20	200/PCS	豎立
2*21	15X15	200/PCS	散裝	2*45	18X20	200/PCS	豎立
2*22	15X15	200/PCS	散裝	2*46	18X20	200/PCS	豎立
2*23	15X15	200/PCS	散裝	2*47	18X20	200/PCS	豎立
2*24	15X15	200/PCS	散裝	2*48	18X20	200/PCS	豎立
2*25	15X15	200/PCS	散裝	2*49	18X20	200/PCS	豎立
				2*50	18X20	200/PCS	豎立

DESCRIPTION(內容)

1.27mm Pin Header H:1.0 180° □=0.40
(環保材料)

DRAWN(製圖): 周志良

CHECKED(確認):

PART NO: P605-SG_-030/023-XX(包裝圖)

APPROVAL(核准):

GENERAL TOLERANCE: (公差)

REV: A/1

REV

DESCRIPTION

DATE

.X .XXX .XX

UNIT: mm

1

2011.09.02

.XXX .XX

SIZE: A4

2

SCALE(比例): 1:XX



SHEET: 1/1

3

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09