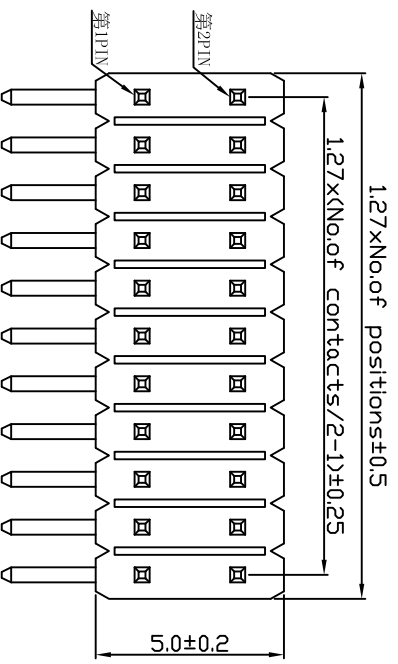


Specifications

Current Rating : 1 Amp

Insulator Resistance : 1000 Megohms Min.

Dielectric Withstanding : AC 500 V


Operating Temperature : -40°C ~ +105°C

Contact Material : Copper Alloy

Insulator Material : Polyester, UL 94V-0

Standard Finish : Nylon-6T

Gold Plated or Tin Plated Finish : Gold Plated all over

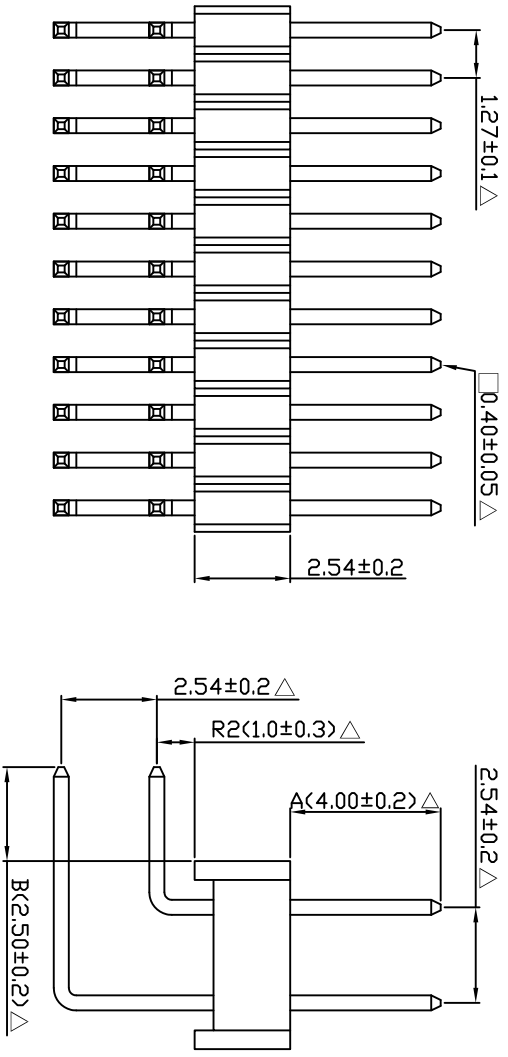

Series Connector Type Contact Material Pin Length mm Number of Contacts

P606B - X X X A / B X X

(Pin Header Dual Row) R:Right Angle Type G:Gold Flash N:Nylon-6T A (040) B (025) (04 To 100 Contacts)

P606B (H:2.54) Down Angle Type A:10T Gold B:15T Gold C:20T Gold


©Duplex Plating D:Gold Flash/Tin (Standard:G)

(If you desire on other length, by marking put desired in the A/B)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE: (公差)		REV:	REV	DESCRIPTION		DATE
1.27mm Pin Header H:2.54 90° □=0.40		黄炳秋		.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	1	△此符號表示重貼管控尺寸		2009.04.10
PART NO: (料號) P606B-R2TN-040/025-XX		CHECKED(確認):		SCALE(比例): 1:XX		SIZE: A4	2			
DWG NO(圖號):		APPROVAL(核准):				SHEET 1/1	3			
							4			

东莞华连电子有限公司

- 1.真空管規格：315x19.2x8.6mm
- 2.外箱規格：40x28x30cm
- 3.未夠一箱請酌量選箱進行包裝

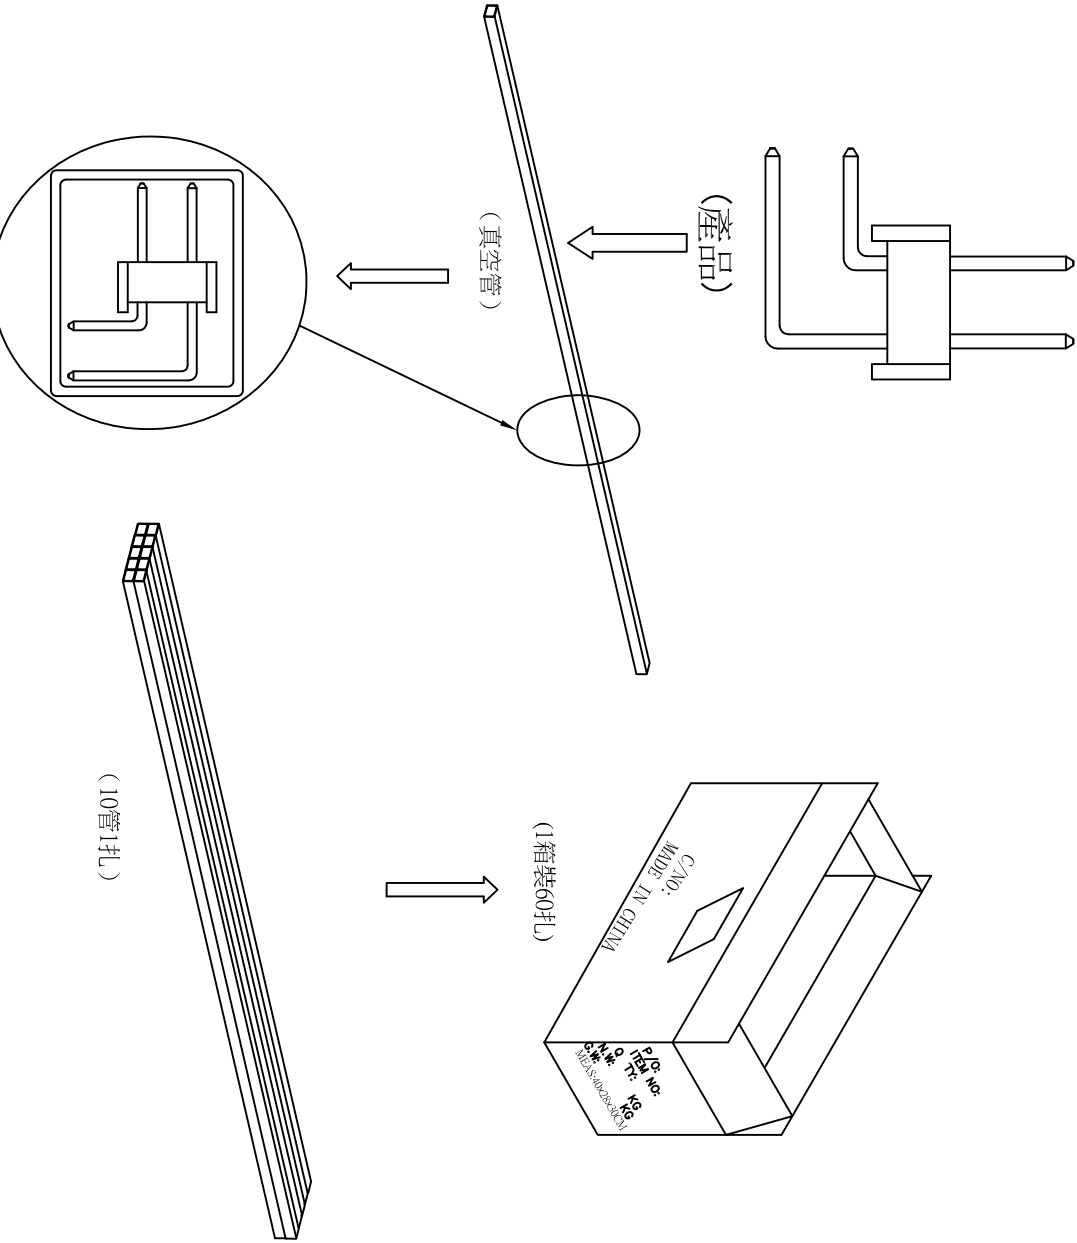

PIN數	包材名稱	每管數量	PIN數	包材名稱	每管數量
			2*26	P02+1	9/PCS
2*2	P02+1	118/PCS	2*27	P02+1	8/PCS
2*3	P02+1	78/PCS	2*28	P02+1	8/PCS
2*4	P02+1	59/PCS	2*29	P02+1	8/PCS
2*5	P02+1	47/PCS	2*30	P02+1	7/PCS
2*6	P02+1	39/PCS	2*31	P02+1	7/PCS
2*7	P02+1	33/PCS	2*32	P02+1	7/PCS
2*8	P02+1	29/PCS	2*33	P02+1	7/PCS
2*9	P02+1	26/PCS	2*34	P02+1	6/PCS
2*10	P02+1	23/PCS	2*35	P02+1	6/PCS
2*11	P02+1	21/PCS	2*36	P02+1	6/PCS
2*12	P02+1	19/PCS	2*37	P02+1	6/PCS
2*13	P02+1	18/PCS	2*38	P02+1	6/PCS
2*14	P02+1	16/PCS	2*39	P02+1	6/PCS
2*15	P02+1	15/PCS	2*40	P02+1	5/PCS
2*16	P02+1	14/PCS	2*41	P02+1	5/PCS
2*17	P02+1	13/PCS	2*42	P02+1	5/PCS
2*18	P02+1	13/PCS	2*43	P02+1	5/PCS
2*19	P02+1	12/PCS	2*44	P02+1	5/PCS
2*20	P02+1	11/PCS	2*45	P02+1	5/PCS
2*21	P02+1	11/PCS	2*46	P02+1	5/PCS
2*22	P02+1	10/PCS	2*47	P02+1	5/PCS
2*23	P02+1	10/PCS	2*48	P02+1	4/PCS
2*24	P02+1	9/PCS	2*49	P02+1	4/PCS
2*25	P02+1	9/PCS	2*50	P02+1	4/PCS

DESCRIPTION(內容): 1.27mm Pin Header H:2.54 90° □=0.40 Nylon-6T (環保材料)		DRAWN(製圖): 鄧文廣		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
PART NO: (料 號) P606B-R2XXN-040/025-XX(包裝圖)		CHECKED(確認):		.x .XX .xxx SCALE(比例): 1:XX		UNIT:	1		2009.08.31
DWG NO(圖號):		APPROVAL(核准):		.xxx X° .XX°		SIZE:	2		
						A4 SHEET:	3		
						1/1	4		

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09