

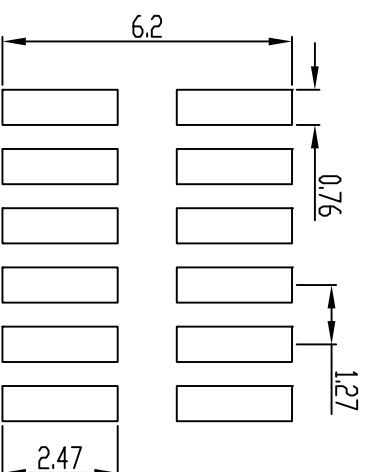


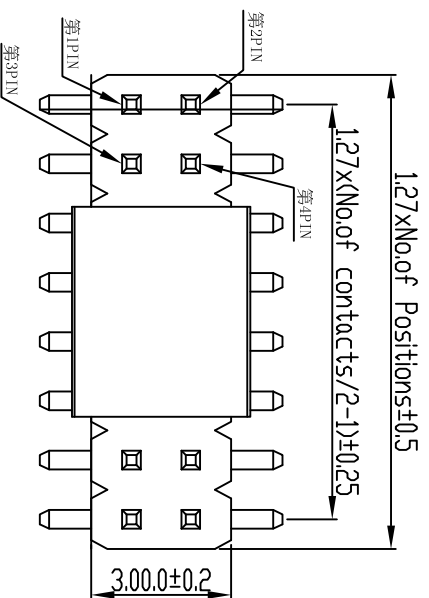

P.C.B. Hole Layout

Specifications




Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T/LCP
Finish	: Gold Plated
Standard	: Gold Flash all over

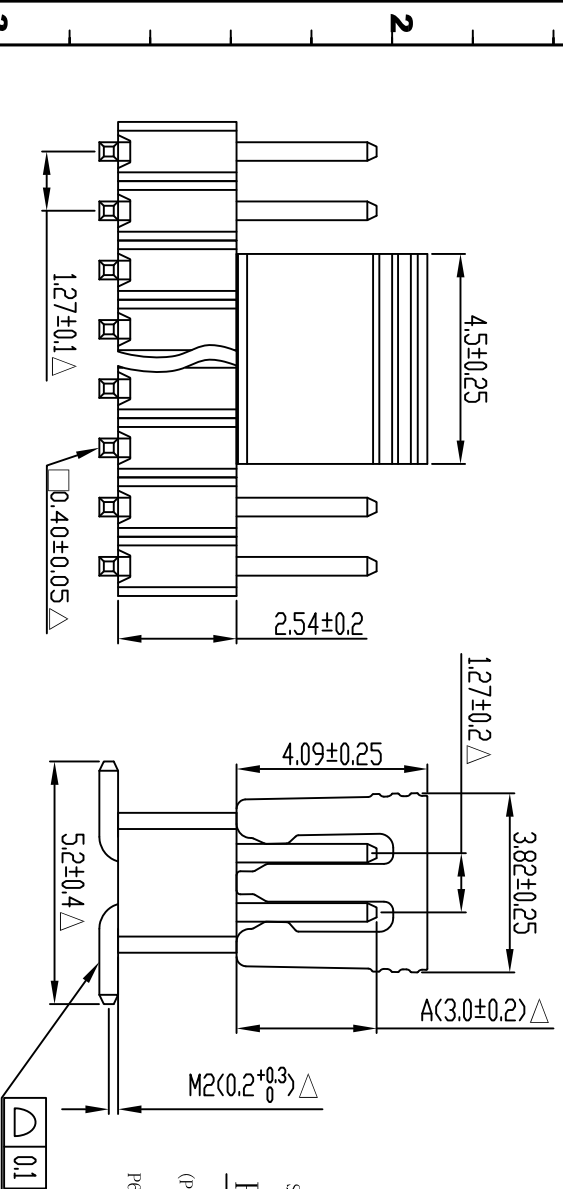

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P609	X	X	X	A	X X	RC
(Pin Header Dual Row)	M: SMT Type M2: 0.2mm	6: Gold Flash N: Ni/10n-6T T: Tin Plated C: LCP A: 100°C Gold B: 150°C Gold C: 200°C Gold	(Standard: N) (If you desire on other length by marking put desired in the A)	A (030)	(04 TO 100 Contacts)	R: PEEL C: CAP
P609 (H: 2.54 展開5.2)	⋮	⋮	⋮	⋮	⋮	⋮
		◎Duplex Plating D: Gold Flash/Tin (Standard: G)				

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
1.27mm Pin Header H:2.54 SMT ☐ =0.40 CAP+ REEL (RoHS)		CHECKED(確認): 鄧文廣		(公差) X. ±0.30 X. ° ±5.0° .XX ±0.20 .X. ° ±3.0° .XX ±0.15 .XX ° ±1.0°		UNIT:	1	△此符號表示重點管控尺寸	2017.10.27
						mm			
						SIZE:			
PART NO:	P609-M2G_-030-XX-RC	APPROVAL(核准):	SCALE(比例):		A4	SHEET:	3		
(料 號)			1:XX			1/1	4		
DWG. NO(圖號):									

东莞华连电子有限公司

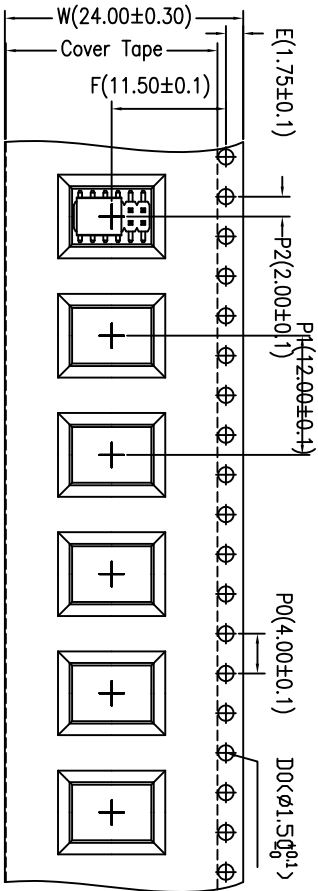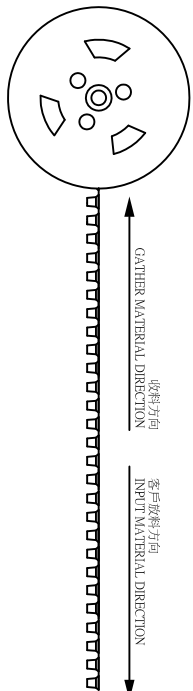

成品




每卷裝800PCS

卷裝之成品

(箱規格:340*340*290)

載帶卷料方向



Notes:
1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
(每10个鏈孔因孔位累計公差為 $\pm 0.2\text{mm}$)
2. Carrier camber not to exceed 1mm in 250mm.
(傳送料帶彎曲變形度每100mm不超過1mm)

3. A and B measured on a plane 0.3mm above the bottom of the pocket
4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
(K0为口袋底部与材料表面的平面距離。)

5. All dimensions meet EIA-481-D requirements.
(所有尺寸符合EIA-481-D标准要求。)


6. Material: Transparent Conductive Polystyrene.
(材料:透明聚苯乙烯。)

7. Thickness: $0.5 \pm 0.05 \text{ mm}$.
(厚度: $0.5 \pm 0.05 \text{ 毫米}$ 。)


8. Packing length per 13" reel :10 Meters.
(每个13"卷軸包裝長度為10 米。)

9. Component loader per 13" reel : 800 pcs.
(每个13"卷軸可裝800个零件。)

外箱



每箱裝9卷共7200PCS



裝好成品之外箱

注: 未注明公差为 ± 0.1 ;
F值以B0为中心;
P2值以A0为中心.

DESCRIPTION(內容):		DRAWN(製圖): 鄧文廣		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION		DATE
1.27mm Pin Header H:1.5 180° □=0.40 Reel+CAP R302-12 (Ro(HS))		CHECKED(確認):		X. XX X.XX		UNIT: mm	1			2018.07.26
PART NO: P609-M2G_-030-12-RC(包裝圖) (料號)		APPROVAL(核准):		SCALE(比例): 1:XX			2			
DWG NO(圖號):							3			
							4			

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09