
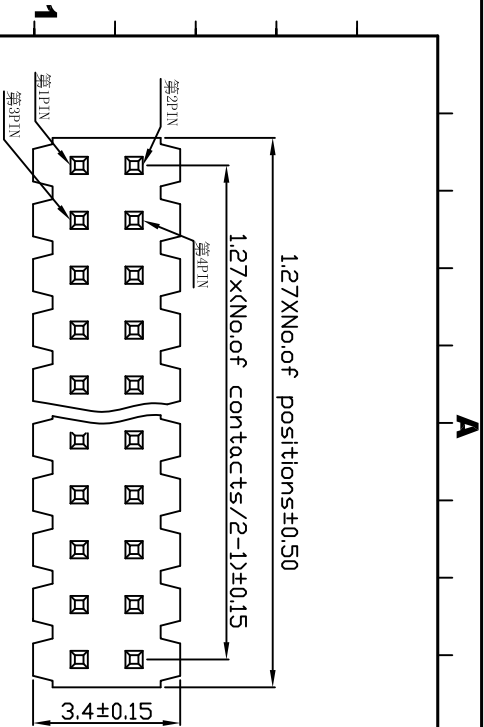


P. C. B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL94V-0
Standard	: Nylon-6T
Finish: Tin, Gold or Duplex Plated	
Standard: Gold Flash all over	

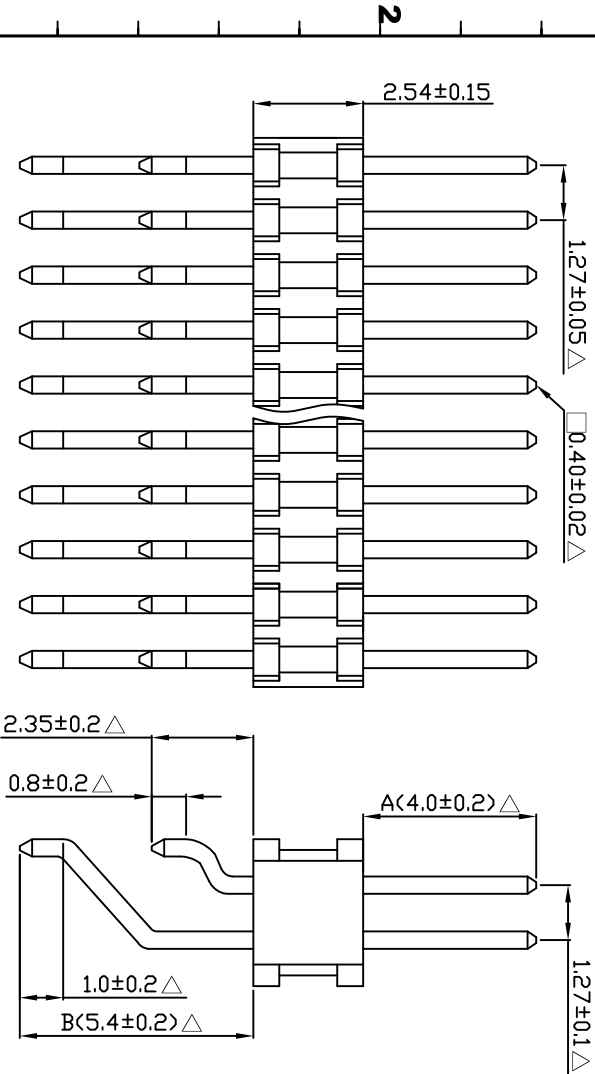

Series

P615

Connector Type

X

Contact Plating

X

Material

X -

Pin Length mm

A / B -

Number of Contacts

X X

(Pin Header Dual Row)

P615 (H: 2.54 W: 3.4)

K: "K" Type

G: Gold Flash N: Nylon-6T

T: Tin Plated C: LCP

A: 10U" Gold (Standard: N)

B: 15U" Gold

C: 20U" Gold

@Duplex Plating

D: Gold Flash/Tin (Standard: G)

A (040) (054) (04 TO 100 Contacts)

(If you desire on other length, by marking put desired in the A/B)

Standard: Gold Flash/Tin

DESCRIPTION(内容):				DRAWN(製圖): 袁仕潤		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION		DATE
1.27mm Pin Header H:2.54 □ -0.40				CHECKED(確認):		.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	1	△此符號表示重點管控尺寸		2007.11.29
雙排貼式 (環保材料)				APPROVAL(核准):		SCALE(比例): 1:XX		SHEET A4	3			
PART NO: P615-KGN-040/054-XX				DWG NO(圖號):				1/1	4			

东莞华连电子有限公司

A


B

C

D

E


FILE NO: CWJ-4E-09



料 號	
品名規格	
數量	
日期	
Part No:	
Description:	
Quantity:	
Date:	

(產品)


內標簽

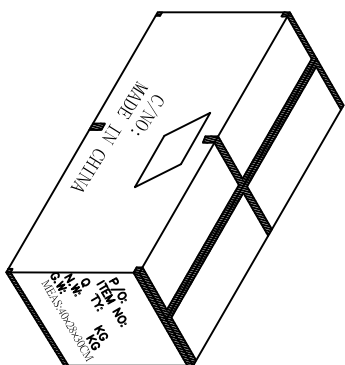

TPR白色軟膠塞

(真空管)

(60扎裝1箱)

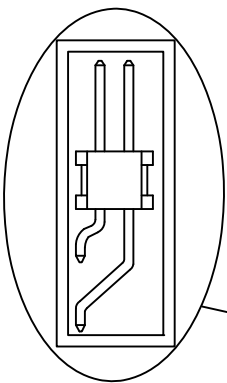

(10管1扎)

兩頭先用PE膜纏繞，再用PE袋及橡膠圈包扎。

- 1.真空管規格：315x13.5x5.2mm
- 2.外箱規格：40x28x30cm
- 3.數量未夠一箱時請酌量選箱進行包裝

PIN數	包材名稱	每管數量	PIN數	包材名稱	每管數量
2*2	P093-1	118PCS	2*26	P093-1	9/PCS
2*3	P093-1	78PCS	2*27	P093-1	8/PCS
2*4	P093-1	59PCS	2*28	P093-1	8/PCS
2*5	P093-1	47PCS	2*29	P093-1	8/PCS
2*6	P093-1	39PCS	2*30	P093-1	7/PCS
2*7	P093-1	33PCS	2*31	P093-1	7/PCS
2*8	P093-1	29PCS	2*32	P093-1	7/PCS
2*9	P093-1	26PCS	2*33	P093-1	7/PCS
2*10	P093-1	23PCS	2*34	P093-1	7/PCS
2*11	P093-1	21PCS	2*35	P093-1	6/PCS
2*12	P093-1	19PCS	2*36	P093-1	6/PCS
2*13	P093-1	18PCS	2*37	P093-1	6/PCS
2*14	P093-1	16PCS	2*38	P093-1	6/PCS
2*15	P093-1	15PCS	2*39	P093-1	6/PCS
2*16	P093-1	14PCS	2*40	P093-1	6/PCS
2*17	P093-1	14PCS	2*41	P093-1	5/PCS
2*18	P093-1	13PCS	2*42	P093-1	5/PCS
2*19	P093-1	12PCS	2*43	P093-1	5/PCS
2*20	P093-1	11PCS	2*44	P093-1	5/PCS
2*21	P093-1	11PCS	2*45	P093-1	5/PCS
2*22	P093-1	10PCS	2*46	P093-1	5/PCS
2*23	P093-1	10PCS	2*47	P093-1	5/PCS
2*24	P093-1	9PCS	2*48	P093-1	5/PCS
2*25	P093-1	9PCS	2*49	P093-1	4/PCS
			2*50	P093-1	4/PCS

DESCRIPTION(內容):

1.27mm Pin Header H:2.54 □=0.40

雙排臥貼式 (環保材料)

PART NO:

P615-KG_-040/054-XX (包裝圖)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:

.X .XXX .XXX

.XXX .XX .XX

SCALE(比例):

1:XX

REV:

A/5

UNIT:

.XXX

SIZE:

A4

REV

2

DESCRIPTION

變更包材

增加第80PIN的包裝

更改真空管P089-1包裝

DATE

2008.10.29

2009.08.12

2013.11.06

2016.05.26

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CW1-4E-09