


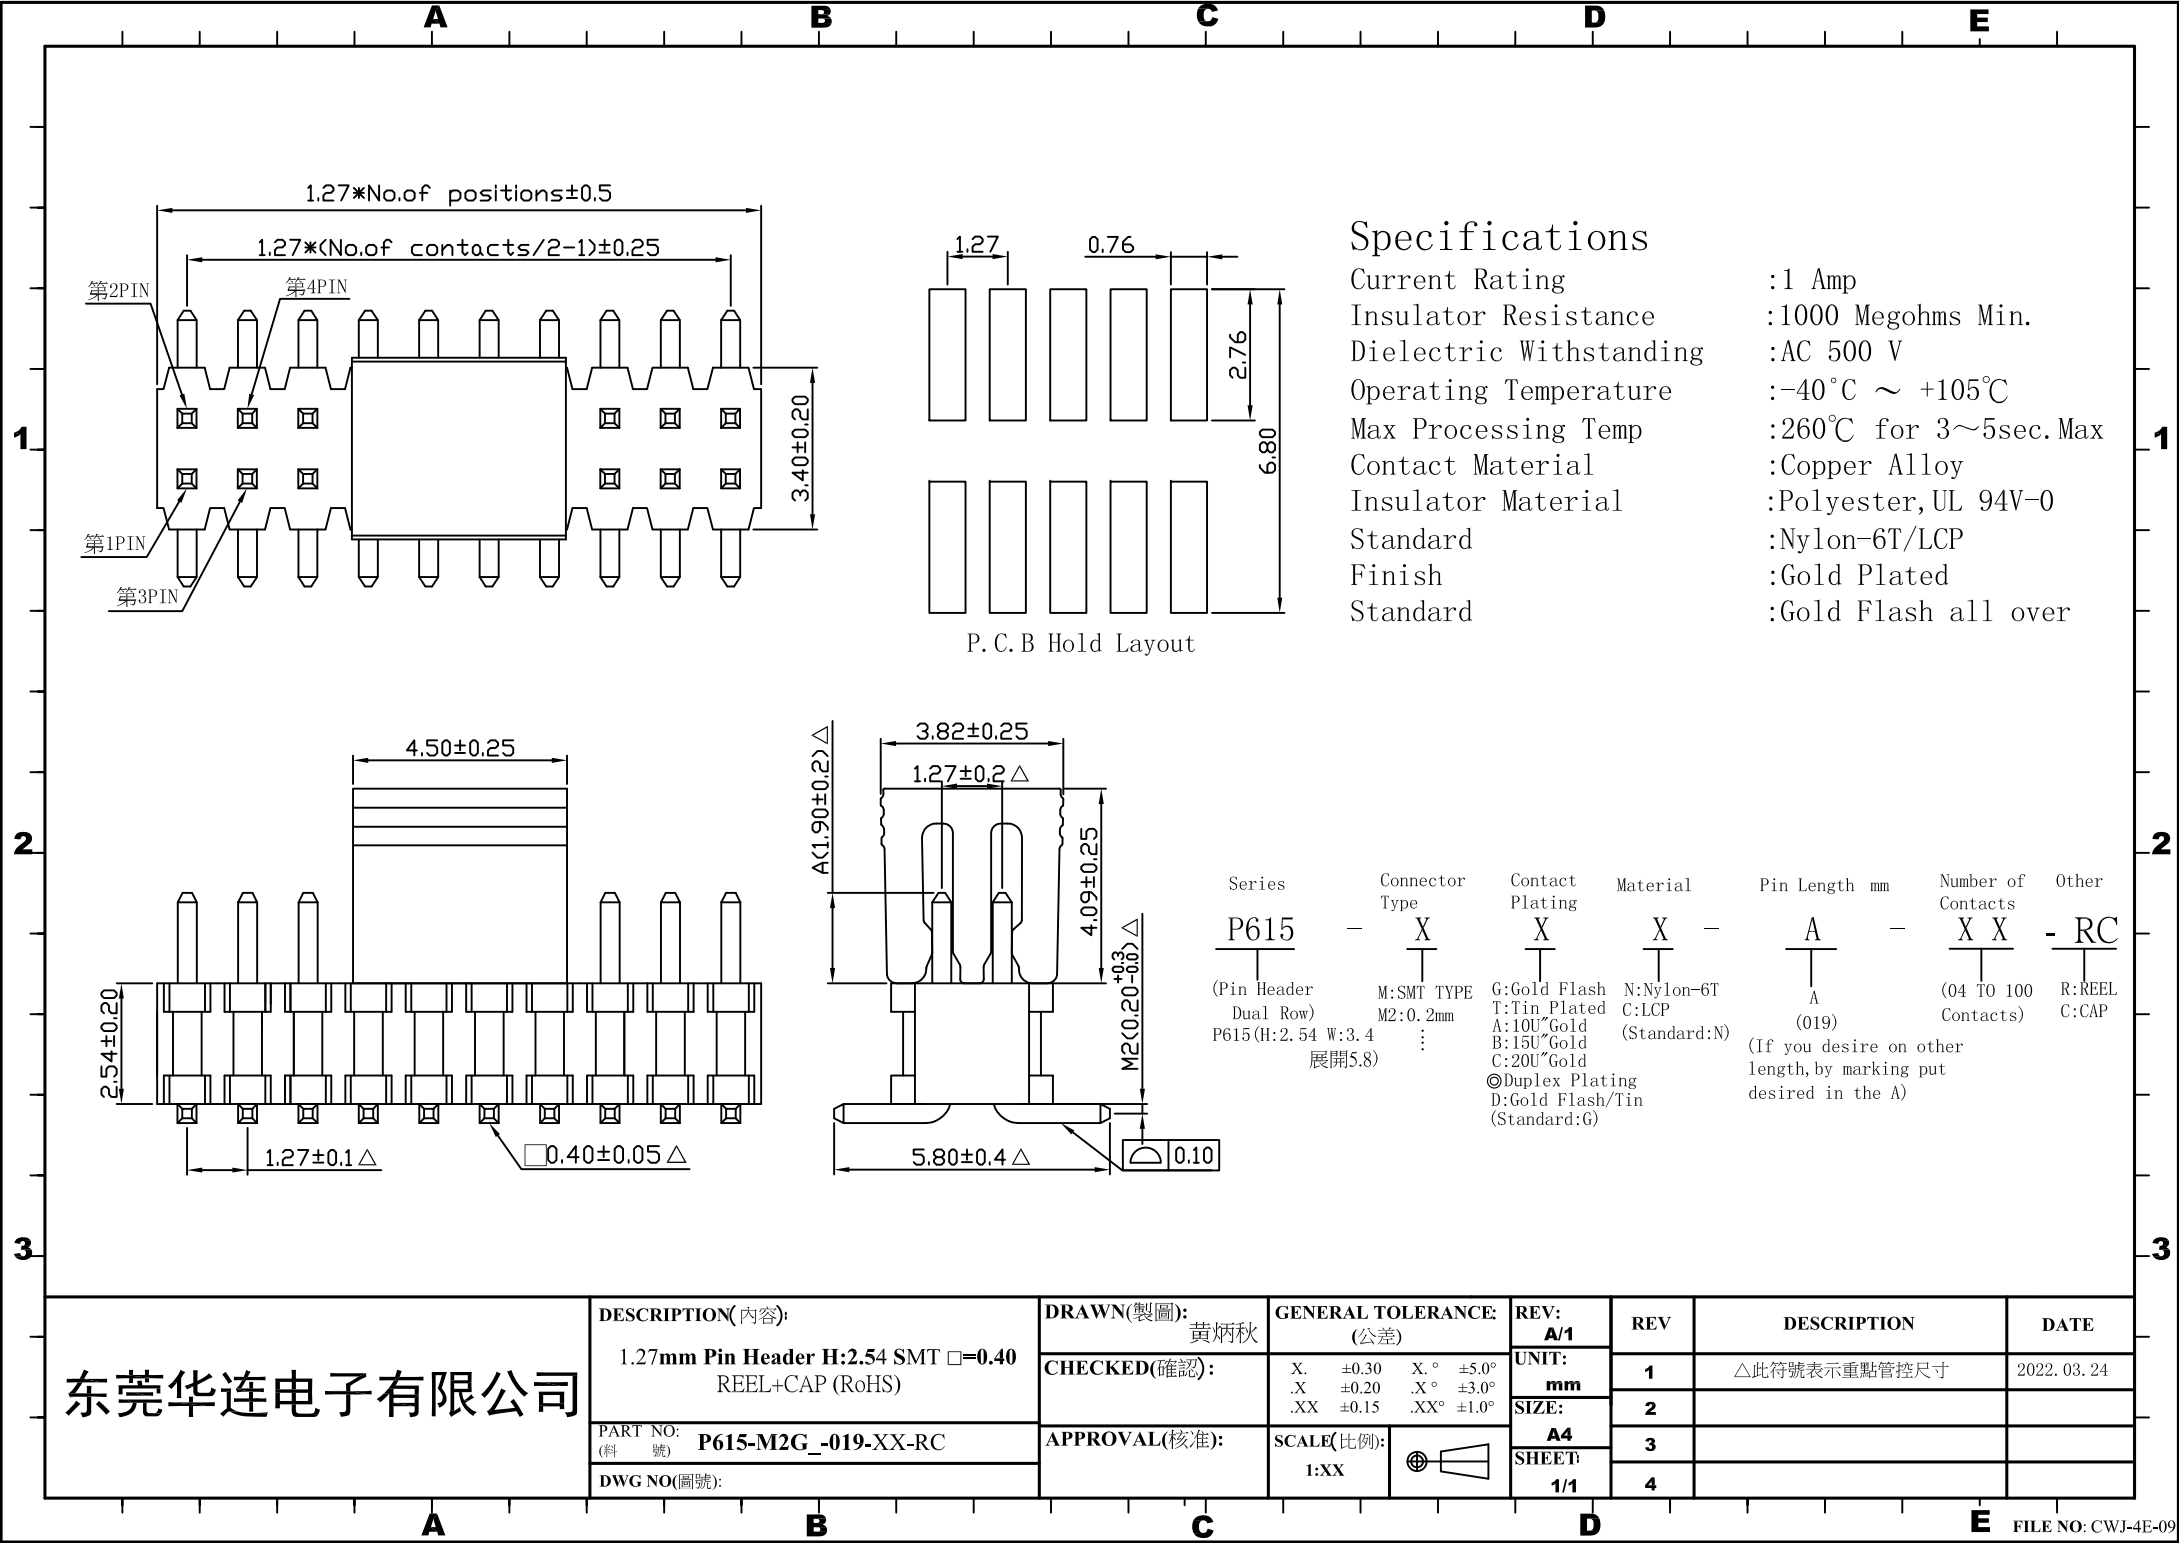

Specifications


Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃ ~ +105℃
Max Processing Temp	:260℃ for 3~5sec. Max
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T/LCP
Finish	:Gold Plated
Standard	:Gold Flash all over

P. C. B Hold Layout

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P615	X	X	X	A	XX	RC
(Pin Header Dual Row P615 (H:2.54 W:3.4 展開5.8)	M:SMT TYPE M2:0.2mm ...	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T C:LCP (Standard:N)	A A (019) (If you desire on other length, by marking put desired in the A)	(04 TO 100 Contacts)	R:REEL C:CAP

东莞华连电子有限公司

DESCRIPTION(内容): 1.27mm Pin Header H:2.54 SMT □=0.40 REEL+CAP (RoHS)	DRAWN(製圖): 黄炳秋		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):		X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX ° ±1.0°		UNIT: mm			
	PART NO: (料 號) P615-M2G_-019-XX-RC		APPROVAL(核准):		SIZE: A4			
	DWG NO(圖號):		SCALE(比例): 1:XX		SHEET: 1/1			





收料方向
GATHER MATERIAL DIRECTION

客戶放料方向
INPUT MATERIAL DIRECTION

收料方向
GATHER MATERIAL DIRECTION

客戶放料方向
INPUT MATERIAL DIRECTION

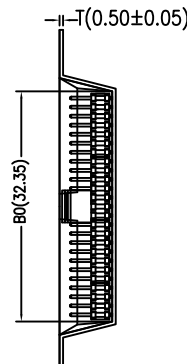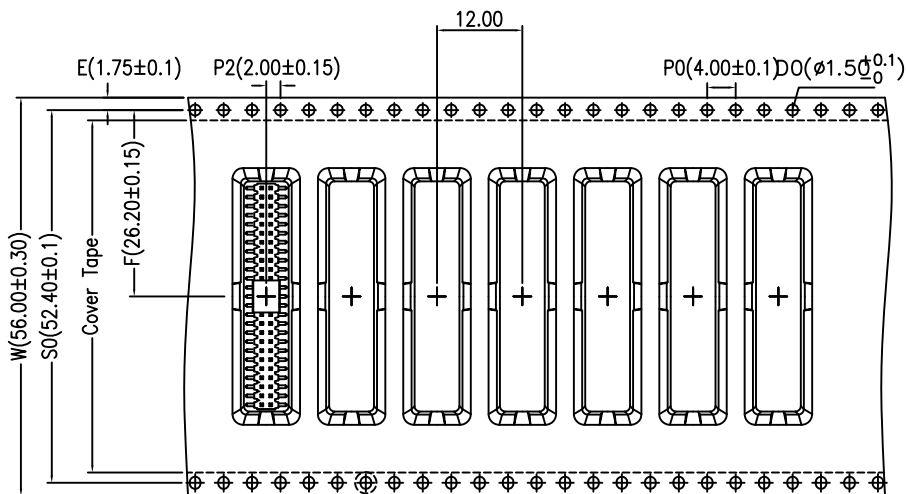


成品

每卷裝750PCS
R375-50


卷裝之成品

(箱規格:340*340*290)



外箱

每箱裝4卷共3000PCS



裝好成品之外箱

Notes:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$

(每10个链轮齿孔直径累计公差为 $\pm 0.2\text{mm}$)

2. Carrier camber not to exceed 1mm in 250mm.

(传送料带弯曲变形每100mm不超过1mm)

3. A and B measured on a plane 0.3mm above the bottom of the pocket.

4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.

(K0为口袋底部与材料表面的平面距离。)

5. All dimensions meet EIA-481-D requirements.

(所有尺寸符合EIA-481-D标准要求。)

6. Material: Transparent polystyrene

(材料:透明PS。)

7. Thickness: $0.50 \pm 0.05\text{mm}$.


(厚度: $0.50 \pm 0.05\text{mm}$ 。)

8. Packing length per 13" reel : 9.6 Meters.

(每个13"卷轴包装长度为9.6米。)


9. Component loader per 13" reel : 750 pcs.

(每个13"卷轴可装 750PCS 前空14 后空10穴)



載帶卷料方向

SECTION
2:1



东莞华连电子有限公司

DESCRIPTION(内容):

1.27mm Pin Header H:2.54 SMT □=0.40
REEL+CAP (RoHS)(R375-50)

PART NO:
(料 號)

P615-M2G_-019-50-RC(包裝圖)

DWG NO(圖號):

DRAWN(製圖):

黃炳秋

CHECKED(確認):

GENERAL TOLERANCE:

(公差)

.x ± 0.30

.xx ± 0.20

.xxx ± 0.10

APPROVAL(核准):

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

DATE

2023.02.21

A

B

C

D

E

FILE NO: CWJ-4E-09