
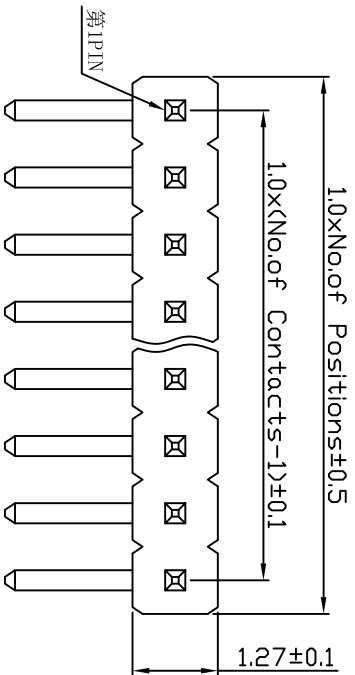
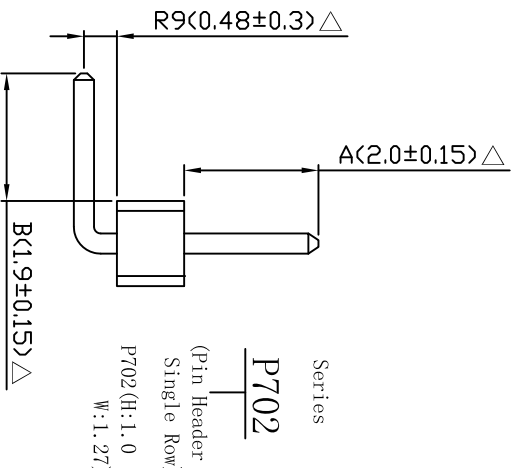


P.C.B Hold Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
Standard	:Gold Flash all over

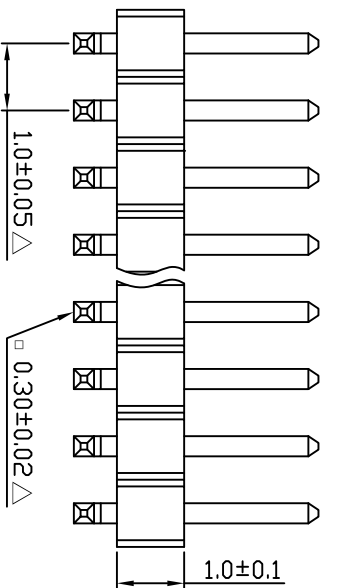

Series	P702	Connector Type	- X	Contact Plating	X	Material	X - X	Pin Length mm	A / B	Number of Contacts	X X
(Pin Header Single Row)											
P702 (H:1.0 W:1.27)		R:Right Angle Type G:Gold Flash (Down Angle Type) R9:0.48mm									
		T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold									
		©Duplex Plating D:Gold Flash/Tin (Standard:G)									

DESCRIPTION(内容):
1.0mm Pin Header H:1.0 90° □=0.30
Nylon-6T (環保材料)

DRAWN(製圖): 周立軍
CHECKED(確認):

GENERAL TOLERANCE: (公差)
.X .XXX
.X° .XX°
SCALE(比例): 1:XX

REV: A/1
UNIT: mm
SIZE: A4

REV 1 2 3 4

DESCRIPTION
△此符號表示重點管控尺寸

DATE
2010.11.15

东莞华连电子有限公司

PART NO: P702-R9GN-020/019-XX
DWG NO(圖號):

APPROVAL(核准):

SCALE(比例): 1:XX

SHEET 1/1

4

A


B

C


D

E

FILE NO: CWJ-4E-09



(產品)




(PE袋)

Part No:	
Description:	
Quantity:	
Date:	

料號
品名規格
數量
日期



(2內箱裝1外箱)

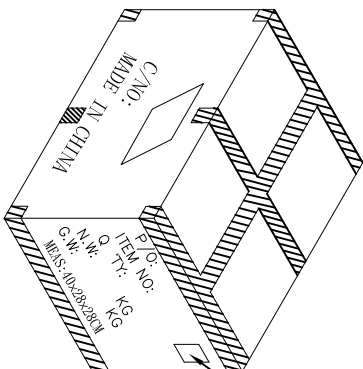

外箱標籤


- 紙箱規格:外箱:400*280*280mm (單重:620g).
內箱:380*265*130mm (單重:280g).
- 真空盤規格:120*80*20mm
- 封箱方式(看上圖所示):外箱四周使用透明的封箱膠帶封住,並封成王字型.
- 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材名稱	每盒數量
1*2	V016+PE袋(15x15)	2000/PCS
1*3	V016+PE袋(15x15)	2000/PCS



內標籤

(V016真空盒)

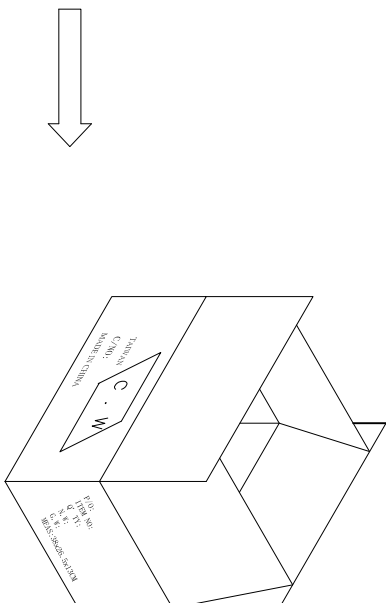

(V016: 45盒裝1內箱,裝5層)

DESCRIPTION(內容)		DRAWN(製圖)		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.0mm Pin Header H:1.0 90° □=0.30 Nylon-6T (環保材料)		鄧文廣		.X .XX .XXX .XXX .X° .XX°		UNIT: A4	1		2019.03.07
CHECKED(確認): 王建平		APPROVAL(核准): 鄧文廣		SCALE(比例): 1:XX		SIZE: A4	2		
PART NO: P702-R9GN-020/019-XX(包裝圖)				SHEET: 1/1			3		
DWG NO(圖號):							4		

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09