
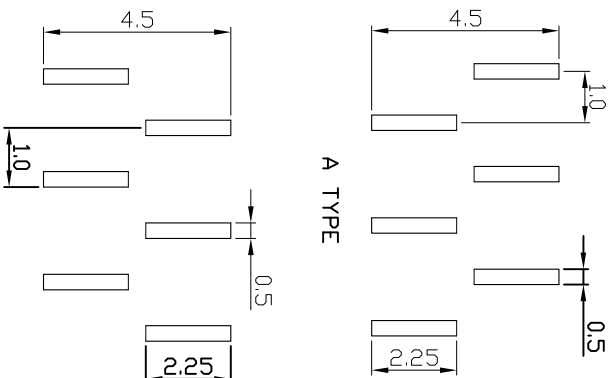


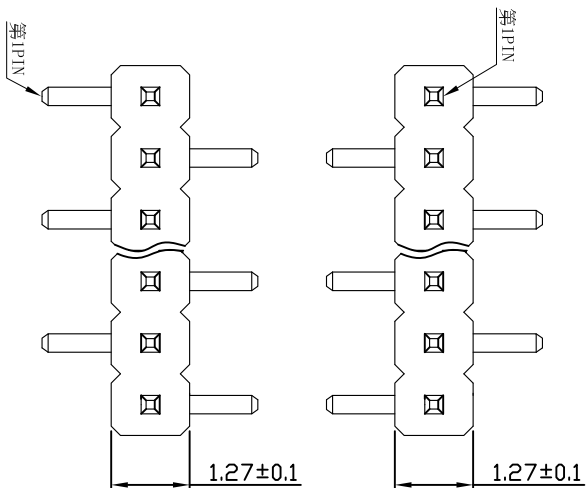

Specifications

Current Rating :0.8 Amp

Insulator Resistance :900 Megohms Min.

Dielectric Withstanding :AC 500 V

Operating Temperature :-40°C ~ +105°C

Soldering Temperature :260°C for 3~5s Max.

Contact Material :Copper Alloy


Insulator Material :High Temperature Thermoplastic. UL 94V-0

Standard Finish :Nylon-6T

Standard :Tin, Gold Plated

Standard :Gold Flash all over

P.C.B SMT Hole Layout

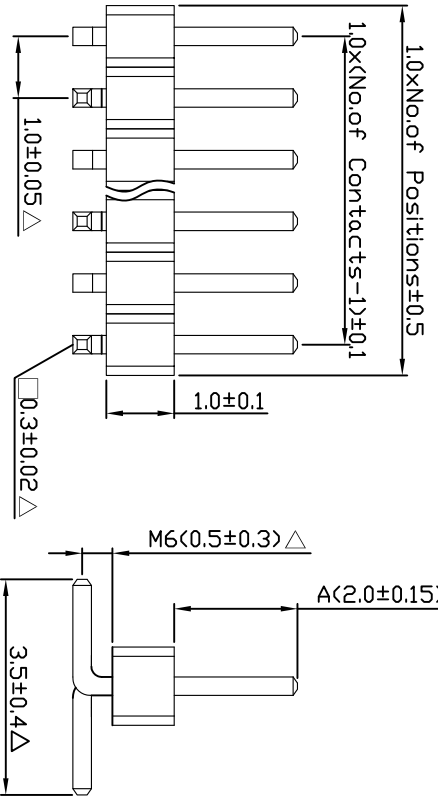

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	A、B TYPE
P703	-	X	X	A	X X	XT
(Pin Header single Row)	M: SMT Type	G: Gold Flash	N: Nylon-6T	A	(02 TO 50 Contacts)	AT: A TYPE
P703 (I: 1.0mm 间距 3.5)	M6: 0.5mm	T: Tin Plated	C: LCP	(020)		BT: B TYPE
		A: 10μ"Gold	(Standard: N)	(If you desire on other length, by marking put desired in the A)		
		B: 15μ"Gold				
		C: 20μ"Gold				
		©Duplex Plating				
		D: Gold Flash/Tin				
		(Standard: C)				

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION		DATE
1.0mm Pin Header H:1.0 SMT □=0.30		黃炳秋		CHECKED(確認):		UNIT: mm	1	△此符號表示重點管控尺寸		2022.02.17
單排單膠(RoHS)		P703-M6G_-020-XX-XT		SCALE(比例):		SIZE: A4	2			
PART NO: (料號)		DWG NO(圖號):		APPROVAL(核准):		SHEET: 1/1	3			
							4			

东莞华连电子有限公司

A


B

C


D

E



FILE NO: CWJ-4E-09




(產品)

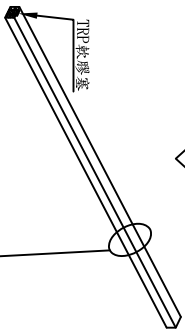

(真空管)

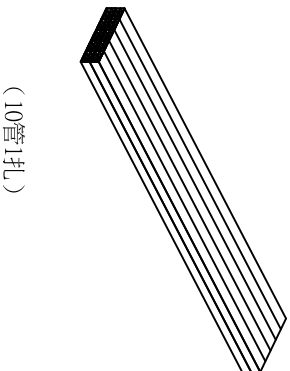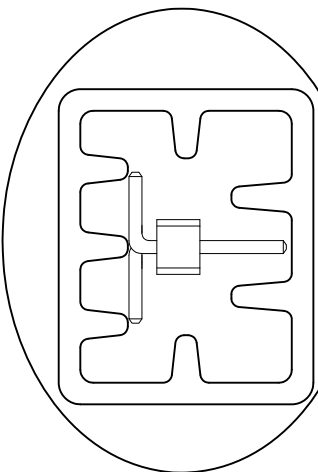

(10管1扎)

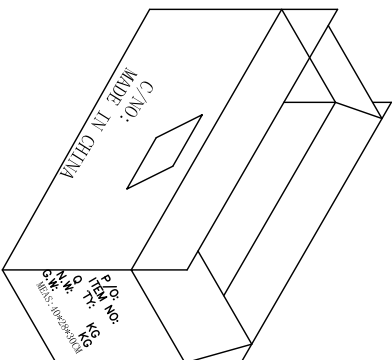

- 1.真空管規格:325×6.8×5.6mm
- 2.外紙箱規格:40*28*30cm
- 3.未够一箱请酌量选箱进行包装

PIN數	包材名稱	每管數量
1*2	PE袋+V001	1000/PCS
1*3	PE袋+V001	1000/PCS
1*4	PE袋+V001	500/PCS
1*5	PE袋+V001	500/PCS
1*6	PE袋+V001	500/PCS
1*7	P016-1	45/PCS
1*8	P016-1	39/PCS
1*9	P016-1	35/PCS
1*10	P016-1	31/PCS
1*11	P016-1	28/PCS

DESCRIPTION(內容)		DRAWN(製圖)		GENERAL TOLERANCE: (公差)		REV: A/1	REV	DESCRIPTION	DATE
1.0mm Pin Header H:1.0 SMT □=0.30 單排單膠(RoHS)		黃炳秋		.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	1		2022. 02. 24
PART NO: (料 號)	P703-M6G_-020-XX-XT(包裝圖)	APPROVAL(核准):		SCALE(比例): 1:XX		SIZE: A4	2		
DWG NO(圖號):						SHEET: 1/1	3		
							4		

东莞华连电子有限公司