

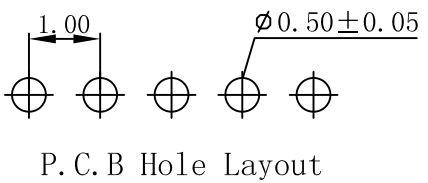
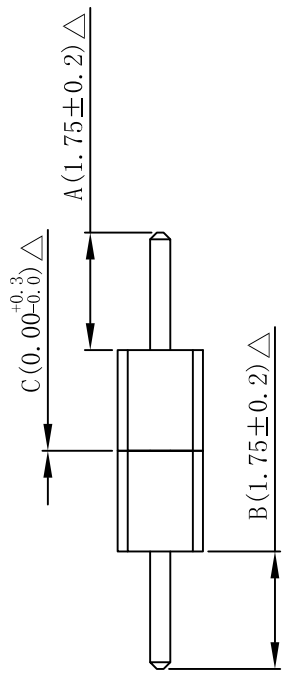


Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40℃~ +105℃
Contact Material	:Copper Alloy
Insulator Material	:High Temperature Thermoplastic.UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold Plated
Standard	:Gold Flash all over

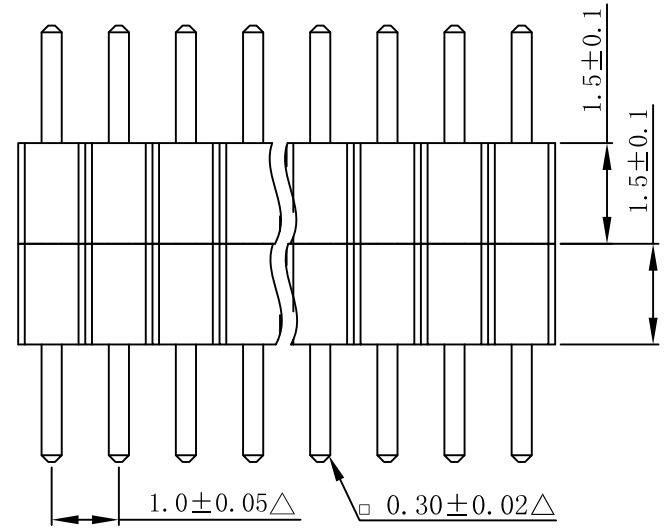


P. C. B Hole Layout

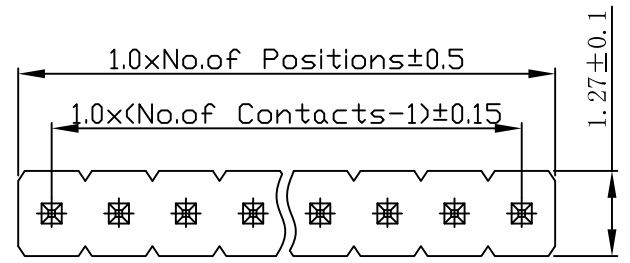

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P724	X	X	X	A / C / B	X X
(Pin Header Single Row) P724 (H:1.5 W:1.27)	S: Straight Type :	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T C: LCP (Standard: N)	A (018) C (000) B (018) (If you desire on other length, by marking put desired in the A/C/B)	(01 TO 50 Contacts)

东莞华连电子有限公司


DESCRIPTION(内容): 1.0mm Pin Header H:1.5 180° □=0.30 (RoHS)	DRAWN(製圖): Bingqiu Huang	GENERAL TOLERANCE:(公差): .X .XXXX .XX .X° .XXX .XX°	REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):	APPROVAL(核准):	UNIT: mm	1	△此符號表示重點管控尺寸	2021.12.07
	PART NO:(料號) P724-SG_-018/000/018-XX	SCALE(比例): 1:XX	SIZE: A4	2		
	DWG NO(圖號):		SHEET: X/X	3		
				4		



(產品)



(PE袋)




(V001真空盒)

Part No:	
Description:	
Quantity:	
Date:	


內標籤

华连料號
品名規格
數量
日期

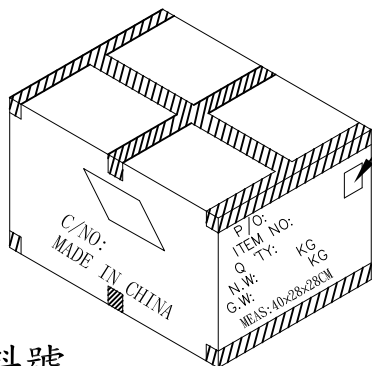

外箱標籤

(2內箱裝1外箱)

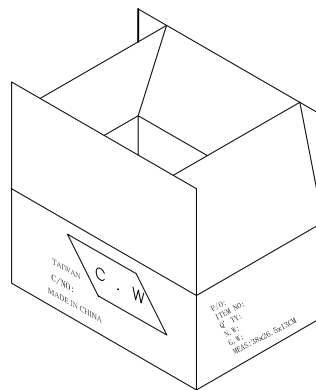

(V016: 45盒裝1內箱,裝5層)

1. 紙箱規格:外箱:400*280*280mm (單重:620g).
內箱:380*265*130mm (單重:280g).
2. 真空盤規格:135*95*50mm(單重:17.5g)
3. 封箱方式(看上圖所示):外箱四周使用透明的封箱膠帶封住,並封成王字型.
4. 紙箱上面一定要寫數量、毛重和淨重.

PIN數	包材名稱	每盒數量
1*3	V001+PE袋(15x15)	2000/PCS
1*4	V001+PE袋(15x15)	2000/PCS
1*5	V001+PE袋(15x15)	2000/PCS

东莞华连电子有限公司

DESCRIPTION(內容):
1.0mm Pin Header H:1.5+1.5 180°
□=0.30 (RoHS)

PART NO:
(料 號) P724-SG_-018/000/018-XX(包裝圖)

DWG NO(圖號):

DRAWN(製圖):
黃炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X °
.XXX .XX°

SCALE(比例):

1:XX



REV:
A/1

UNIT:

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

DATE

2021.12.07