
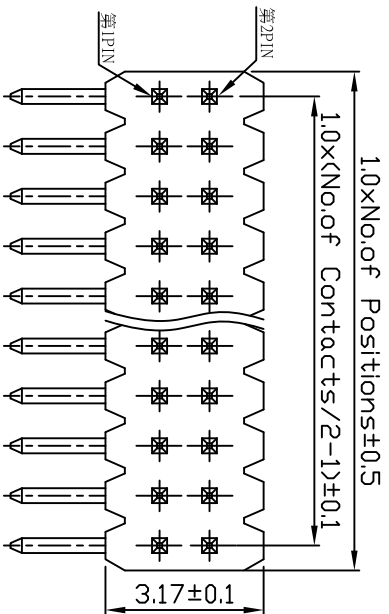


P.C.B Hole Layout

Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
Standard	:Gold Flash all over

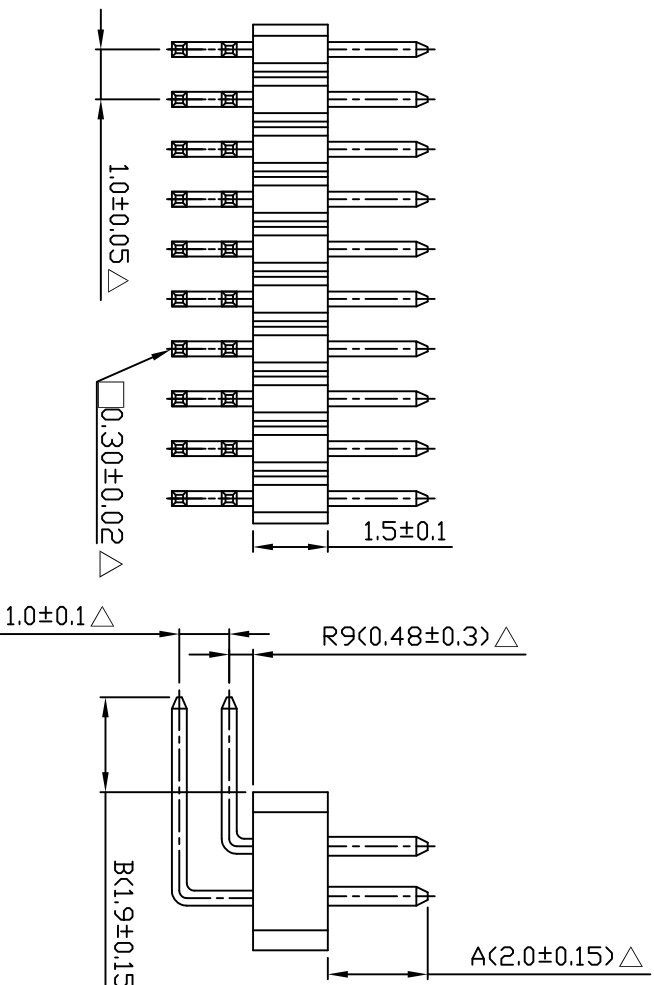

Series

Connector Type

Contact Plating

Material

Pin Length mm

Number of Contacts

P801

- X

X

X

- A / B -

X X

(Pin Header

Dual Row)

P801 (H:1.5

W:3.17)

R:Right Angle Type

(Down Angle Type)

R9:0.48mm

;

T:Fin Plated

A:100"Gold

B:150"Gold

C:200"Gold

@Duplex Plating

D:Gold Flash/Tin

(Standard:G)

A

B

(04 TO 100

Contacts)

(If you desire on other

length, by marking put

desired in the A/B)

DESCRIPTION(内容):

1.0mm Pin Header H:1.5 90° □=0.30

(RoHS)

DRAWN(製圖):

鄧文廣

CHECKED(確認):

鄧文廣

PART NO: P801-R9G_-020/019-XX

(料 號)

DWG NO(圖號):

GENERAL TOLERANCE:

(公差)

.X .XXX

.X° .XX°

.XXX .XX°

SCALE(比例):

1:XX



REV: A/1

UNIT: mm

SIZE: A4

SHEET: 1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

2019.09.04

DATE

东莞华连电子有限公司