
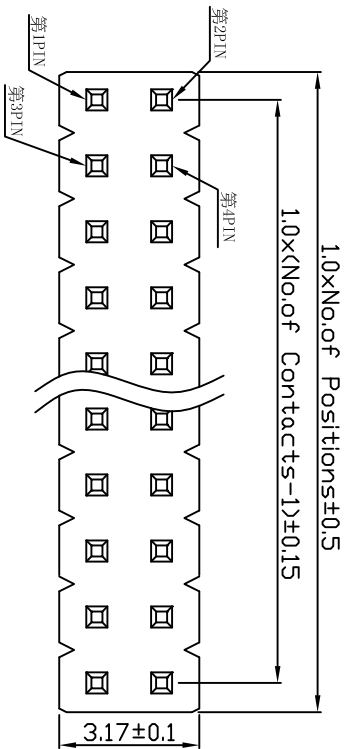


P. C. B Hole Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Brass
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Tin, Gold Plated
Standard	: Gold Flash all over

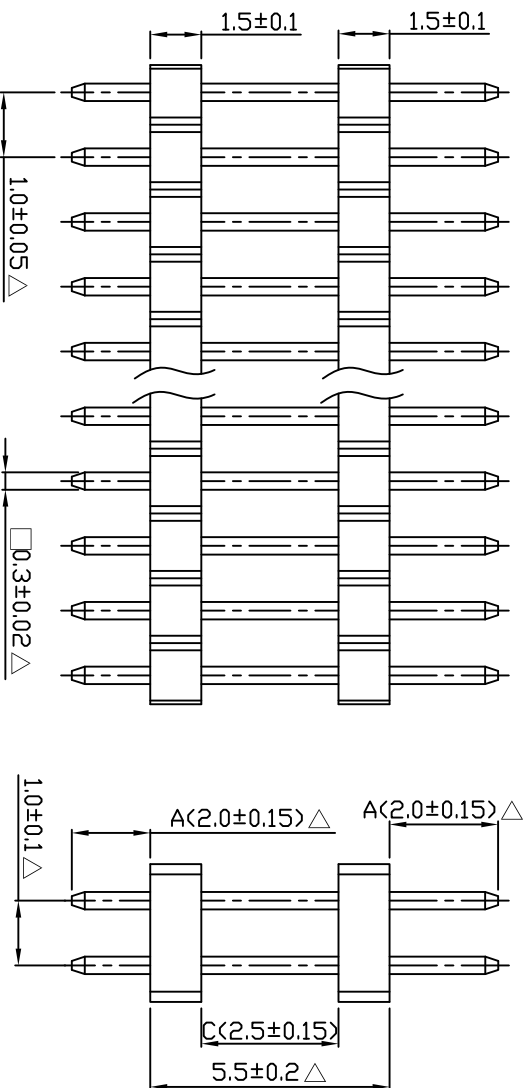


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P821	-	X	X	A / C / B	- X X
(Pin Header Dual Row)	S: Straight	T: Tin Plated	N: Nylon-6T	A (020) C (025) B (020)	(02 TO 100 Contacts)
P821 (H: 1.5 W: 3.17)					

©Duplex Plating
D: Gold Flash/Tin
(Standard: G)


(If you desire on other length, by marking put desired in the A/C/B)

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION		DATE
1.0mm Pin Header H:1.5 180° □=0.30		黃炳秋		(公差)		A/1	1	△此符號表示重點管控尺寸		2023.01.02
雙排雙膠 Nylon-6T(ROHS)		CHECKED(確認):		.X	.XXXX	UNIT:	2			
PART NO: P821-SCN-020/025/020-XX		APPROVAL(核准):		.XX	.XX°	mm	3			
(料 號) DWG NO(圖號):		SCALE(比例):		1:XX	1:XX	A4	4			
						SHEET				
						X/X				


东莞华连电子有限公司



(產品)




(PE袋)





內標籤

(V016真空盒)

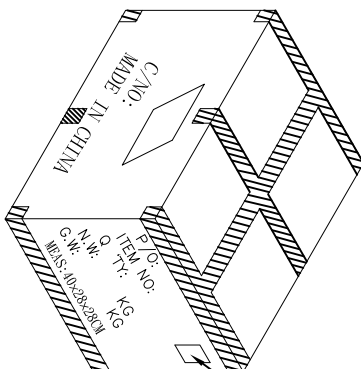

外箱標籤

(2內箱裝1外箱)

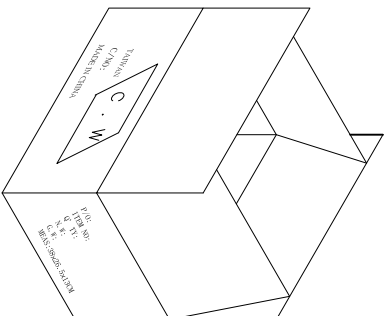

(V016: 45盒裝1內箱,裝5層)

Part No:	
Description:	
Quantity:	
Date:	

內標籤

料號

品名規格

數量

日期

PIN數	包材名稱	每盒數量
2*1	V016+PE袋(15x18)	3000/PCS
2*2	V016+PE袋(15x18)	2000/PCS

1. 紙箱規格:外箱:400*280*280mm (單重:620g).
內箱:380*265*130mm (單重:280g).
2. 真空盤規格:120*80*20mm
3. 封箱方式(看上圖所示):外箱四周使用透明的封箱膠帶封住,並封成王字型.
4. 紙箱上面一定要寫數量、毛重和淨重.

DESCRIPTION(內容)

1.0mm Pin Header H:1.0 180° □=0.30

雙排雙膠 (RoHS)

PART NO:

P821-SGN-020/025/020-XX

(料

號)

DWG NO(圖號):

DRAW(製圖)

黃炳秋

CHECKED(確認):

.X
.XX
.XXX

.XXXX
.X°
.XX°

APPROVAL(核准):

SCALE(比例):

1:XX



REV:

A/1

REV

1

DESCRIPTION

DATE

UNIT:

1

SIZE:

2

SHEET:

1/1

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09