

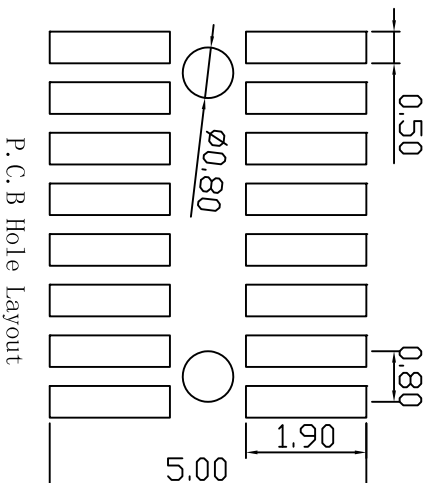
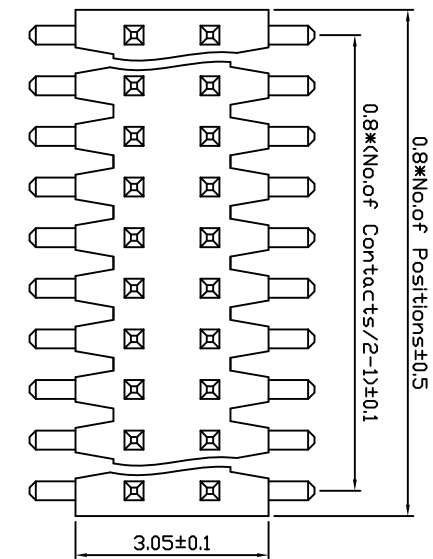


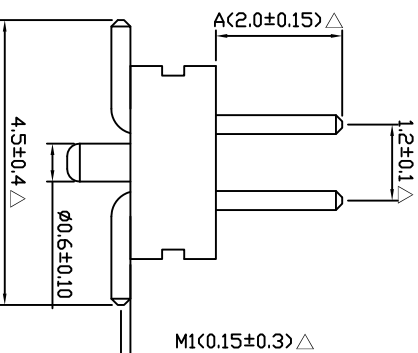

P. C. B Hole Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 800 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5s Max.
Contact Material	: Copper Alloy
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Tin, Gold Plated
	: Gold Flash all over

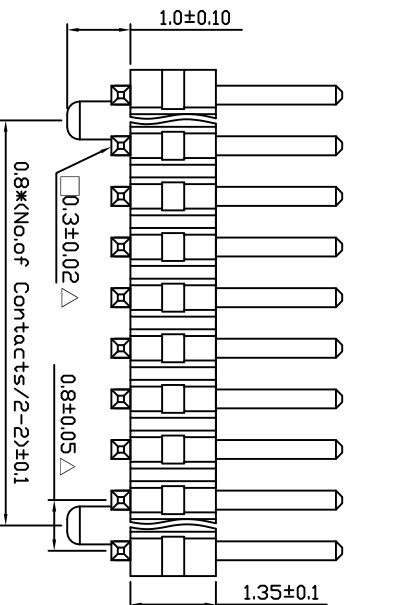

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P901	X	X	X	A	X X -	P
(Pin Header Dual Row)	M: SMT TYPE M1: 0.15mm P901(H: 1.35 W: 3.05 展開4.5)	G: Gold Flash T: Tin Plated A: 100° Gold B: 150° Gold C: 200° Gold D: Gold Flash/Tin (Standard: C)	N: Nylon-6T (Standard: N)	A (020)	(08 TO 100 Contacts)	P: PEG

(If you desire on other length, by marking put desired in the A)

DESCRIPTION(内容):

0.8mm Pin Header H:1.35 SMT □=0.30
Nylon-6T 定位柱 (環保材料)

CHECKED(確認):

黃炳秋

GENERAL TOLERANCE:
(公差)

.X .XXXX
.XX .X°
.XXX .XX°

APPROVAL(核准):

SCALE(比例):
1:XX

PART NO:
P901-M1GN-020-XX-P
(料 號)

DWG NO(圖號):

REV:

A/3

REV

DESCRIPTION

DATE

UNIT:

mm

1

△此符號表示重點管控尺寸

2015.08.10

SIZE:

A4

2

修正: 材料: EBN20150907-1

2015.09.01

SHEET:

1/1

3

更改: 輸入: 11 數為 8P

2018.11.14

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09