MileStrong



Standard LED Display

Counter Desk LED Display

Pixel Pitch (mm) : 1.86 / 2.5

Product Size (mm) : 1,065×585×1,100 / 1,675×585×1,100

Sleek Design & Product Size

The Counter Desk LED Display combines modern aesthetics with functional versatility, designed to enhance reception areas with vibrant visuals. Its sleek black finish and refined proportions create a professional look that complements any environment.






MSC-A

Product Size: L1,675×W585×H1,100mm

Module Size: 320×160mm

Display Size: 2,560×(800+160)mm

Spray Color: Black

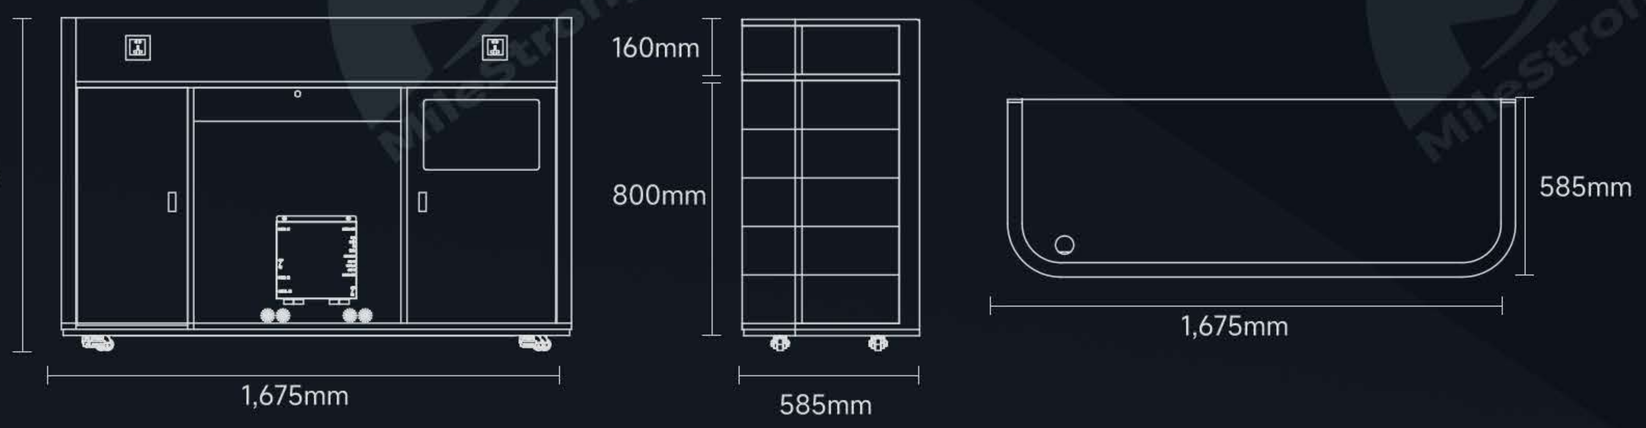

MSC-B

Product Size: L1,065×W585×H1,100mm

Module Size: 320×160mm

Display Size: 1,920×(800+160)mm

Spray Color: Black



Flexible LED Modules

The Counter Desk LED Display uses 320×160mm modules designed for stability, safety, and durability. With GOB protection, fire-resistant materials, and precision machining, these modules ensure reliable performance and long-lasting visual quality in any environment.



Fire-Resistant Shell

Flame-retardant materials provide enhanced safety and reliability.

Precision Magnet Sleeve


Ensures better adsorption flatness and improved module stability.

Protective GOB Technology

Adds durability by preventing damage from bumps and collisions during handling and installation.

Detailed Overview

Designed for convenience, the Counter Desk LED Display offers plug-and-play operation, easy tool-assisted maintenance, and smooth mobility with adjustable wheels. It also supports customizable sockets and comes with a Nova AD20 controller for versatile connectivity.

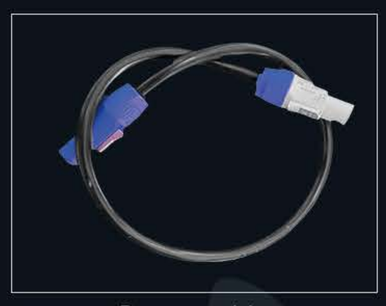

Power cable



Plug-and-Play



Easy maintenance with tool




Adjustable height wheels



Nova AD20 controller
(Wi-Fi / USB / HDMI / external speaker option)



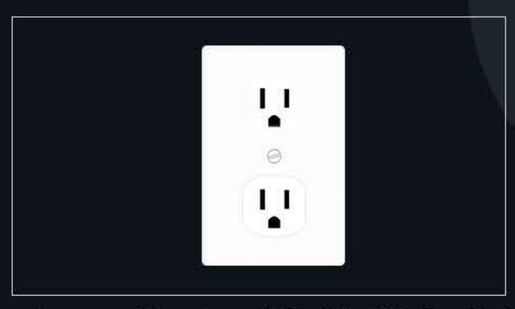



Supports region-specific plugs (US, EU, UK, South Africa, etc.)

Flight Case Packing

Each unit is securely packed in a flight case that is impact-resistant, waterproof, and insulated. This ensures the safety of the display during long-distance transportation and repeated handling.



Application Scenarios

Ideal for reception desks, hotel lobbies, shopping malls, exhibition halls, corporate offices, and other premium locations where first impressions matter.





Parameters

Model	A-186	A-25	B-186	B-25
Pixel Pitch (mm)	1.86	2.5	1.86	2.5
Module Size (mm)	320×160			
LED Type	SMD1212	SMD1515	SMD1212	SMD1515
Module Resolution (W×H)	172×86	128×64	172×86	128×64
Cabinet Resolution (W×H)	1,376×516	1,024×384	1,032×516	768×384
Product Size (mm)	L1,675×W585×H1,100		L1,065×W585×H1,100	
Display Size (mm)	2,560×960		1,920×960	
Brightness (cd/m²)	500–600	500–600	500–600	500–550
Refresh Rate (Hz)	3,840			
Protection Level	IP43			
Control System	Novastar AD20			
Input Voltage	AC 100–240V（50/60Hz）			
Power Consumption (W/m²)	600–700W			
Flight Case Dimensions (mm)	1,930×710×1,320		1,300×710×1,320	
Net Weight (kg)	160		94	
Gross Weight (kg)	215		160	

* The specifications are for reference only. Actual parameters may vary depending on the specific model or contractual agreement.

MileStrong

Bring your ideas into reality

MileStrong Headquarters & Showroom

4/F, Building B15, Phase II, Xincheng Chuangzhi Industrial Park, No. 456 Heping Road, Furong District, Changsha, Hunan, China

Shenzhen MileStrong Conventional Display Division

Building 4, Yinjin Technology Industrial Park, Fengjing South Road, Hewan Community, Matian Subdistrict, Guangming District, Shenzhen, Guangdong, China

Shenzhen MileStrong XR/Immersive Display Division

3/F, Building 5, Xinlianhe Industrial Park, Bao'an District, Shenzhen, Guangdong, China

Shenzhen MileStrong Transparent Display Division

3/F, Tianyou Building, Yuekang Road, Bao'an District, Shenzhen, Guangdong, China

---

Shenzhen Milestrong Technology Co., Ltd.

Website | WhatsApp | WeChat | TikTok | YouTube