

由于我们在不断努力改进产品，我们保留样本数据更改的权利，敬请谅解。

As we are constantly endeavouring to improve the performance of our equipment.

The company reserves the right to make alteration from time to time and equipment differ from that detailed in this brochure.

深井泵

Deep Well Pump



浙江扬子江泵业有限公司
ZHEJIANG YANGTZE RIVER PUMP CO.,LTD

Address: No. 3, Linyang Industrial Zone, Oubei, Yongjia,

Wenzhou, Zhejiang Province, China

E-mail:sales@yangzepumps.com

Tel: +86-577-67988715

Website:www.yangtzeriverpump.com



BE A DARE TO THINK
DARE TO DO, DARE TO INNOVATE

ALL COPPER MOTOR/LARGE FLOW
HIGH HEAD/QUALITY ASSURANCE





人人用好水
家家有清泉



INSTALL WIRING DIAGRAM parts



- Low noise boost
High efficiency low noise
- Energy saving and environmental protection
Energy saving, low noise, pollution-free, efficient

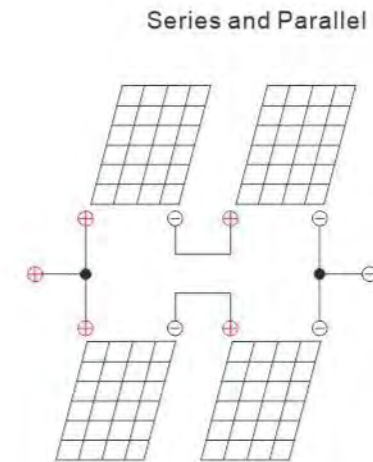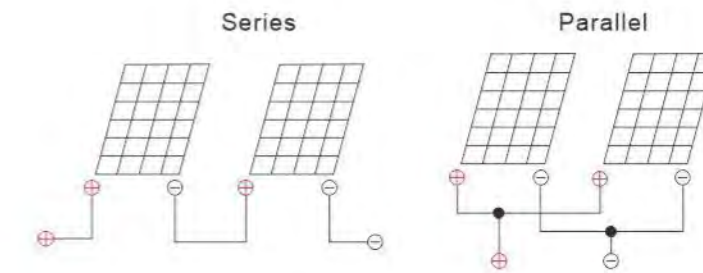


Tips: When it's series connection, the voltage is added, but the current is not changed;
When it's parallel connection, the voltage is unchanged, but the current is added.

HOW TO CONNECT WITH CONTROLLER BOX?

1.P+ terminal need to be connected with the positive anodes of solar panels; P- terminal need to be connected with the negative anodes of solar panels.

2.UVW wiring terminal connect with our pump cables, which have three core wires, will be marked "U" "V" "W".

3.each water sensor need 2 core wires, just color different. For example, one water sensor have one blue wire and one brown wire. then we put two blue wires together connect with "COM" wiring terminal. One brown wire connect with "TL" wiring terminal, this water sensor need to be placed the position where the water tower you need to start drawing water. The other brown wire connect with "TH" wiring terminal, this water sensor need to be placed the position where the water tower you need to stop drawing water.

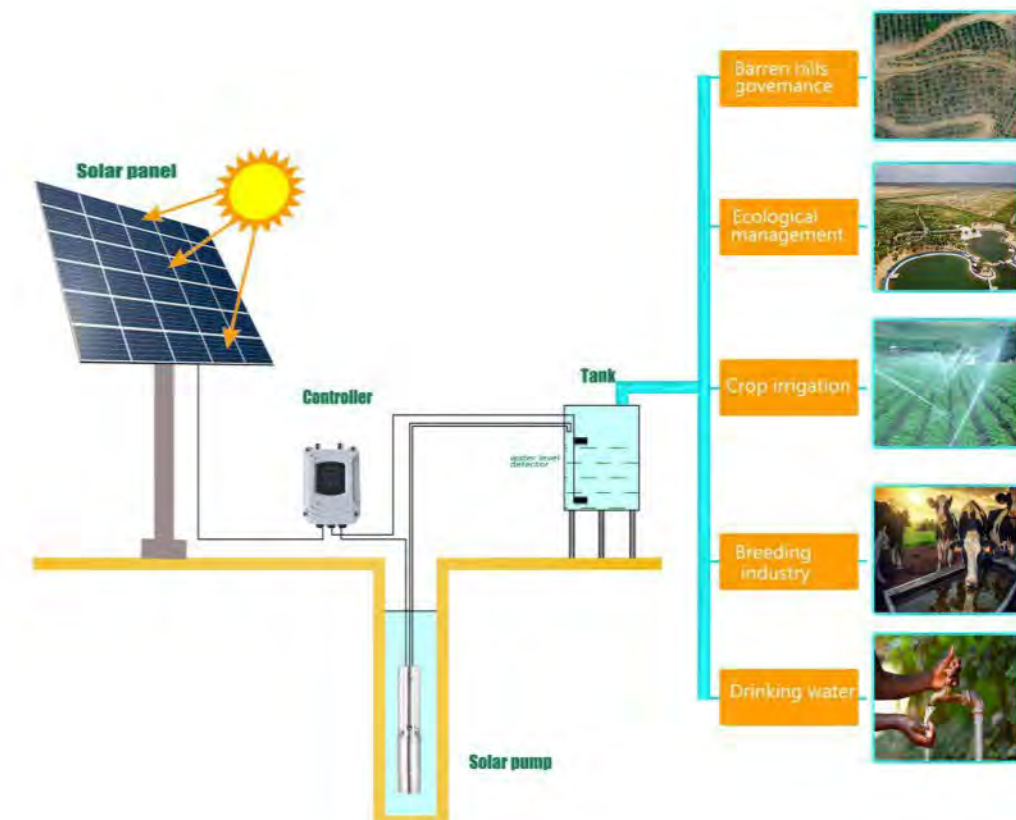

SOLAR PUMP

- 1.DC brushless permanent magnet motor: 100% copper wire winding+cold-rolled silicon steel sheet, with high-speed punching, improve the efficiency and precision. Reliable operation, small volume, small mass, less loss.
- 2.NSK bearing: low noise, high speed, high precision, low friction, long life
- 3.Alloy mechanical seal. Lower working life and high reliability.
- 4.Energy-saving and environment-protected green products: Compared with the traditional alternation current machine,the efficiency is improved 25% by the permanent magnetism, direct current, brushless, non-sensor motor.
- 5.Digital intelligent MPPT controller box: can detect the circuit automatically, have High/low voltage protection, over-current/overload protection, lack of water protection, etc. It also have soft start, no impulse current. The motor will be very safe, won't be burned.
- 6.LED screen can show speed, voltage, current, power etc.
- 7.Auto start, when there is solar power, the pump will operate automatically.
- 8.Green environmental protection and no pollution.High efficiency, high reliability, small size, light weight, more functions, maintenance-free.





Q3QGS

太阳能螺杆泵系列



Series Products Model Example

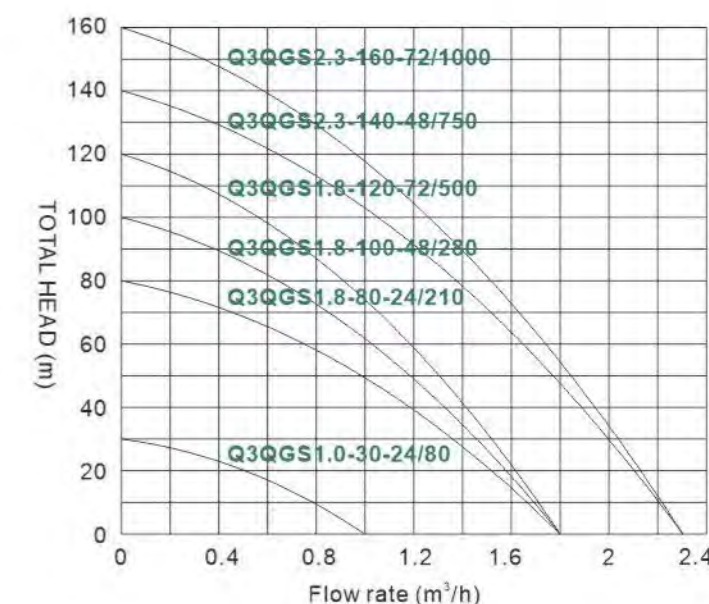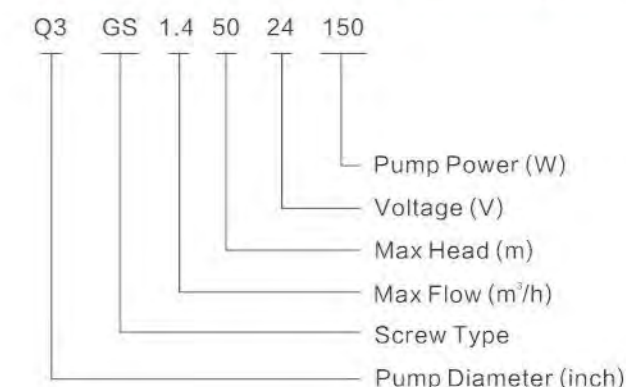


Q3QGS PERFORMANCE DATA

型号 Model	功率 Power (W)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	出水口径 Outlet (inch)
Q3QGS1.0-30-24/80	80	24	1	30	1"
Q3QGS1.8-80-24/210	210	24	1.8	80	
Q3QGS1.8-100-48/280	280	48	1.8	100	
Q3QGS1.8-120-72/500	500	72	1.8	120	
Q3QGS2.3-140-48/750	750	48	2.3	140	
Q3QGS2.3-160-72/1000	1000	72	2.3	160	

Q3SC

太阳能深井泵系列
Solar deep well pump series

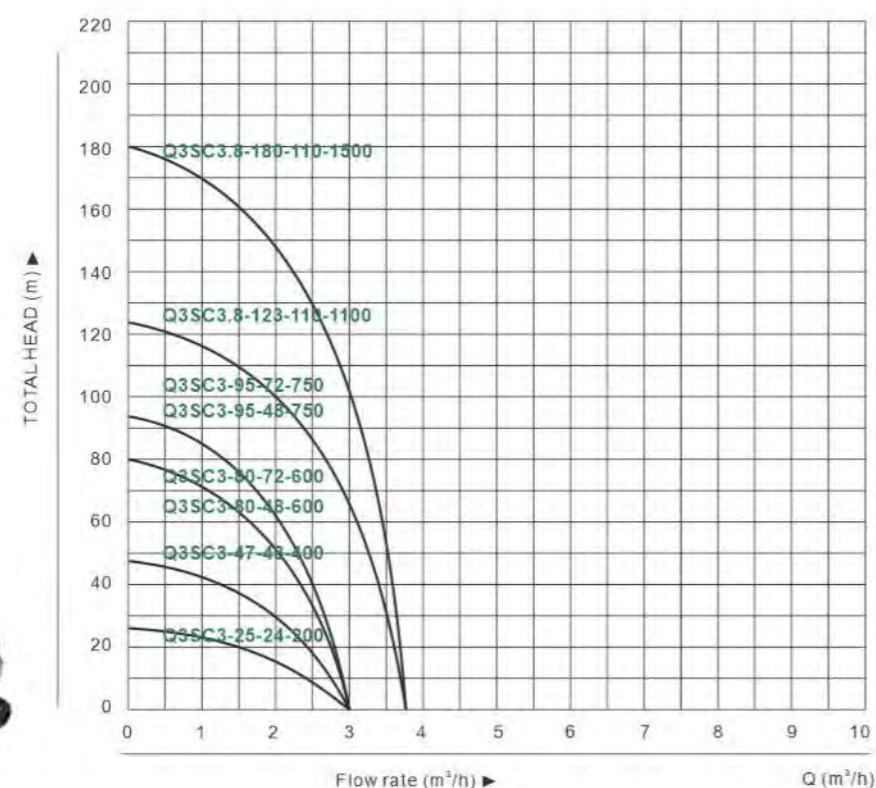


MODEL SELECTION

型号 Model	功率 Power (w)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	出水口径 Outlet (inch)
Q3SC3-25-24-200	200	24	3	25	1"
Q3SC3-47-48-400	400	48	3	47	
Q3SC3-80-48-600	600	48	3	80	
Q3SC3-80-72-600	600	72	3	80	
Q3SC3-95-48-750	750	48	3	95	
Q3SC3-95-72-750	750	72	3	95	
Q3SC3.8-123-110-1100	1100	110	3.8	123	
Q3SC3.8-180-110-1500	1500	110	3.8	180	

Q3SSC

太阳能深井泵系列
Solar deep well pump series

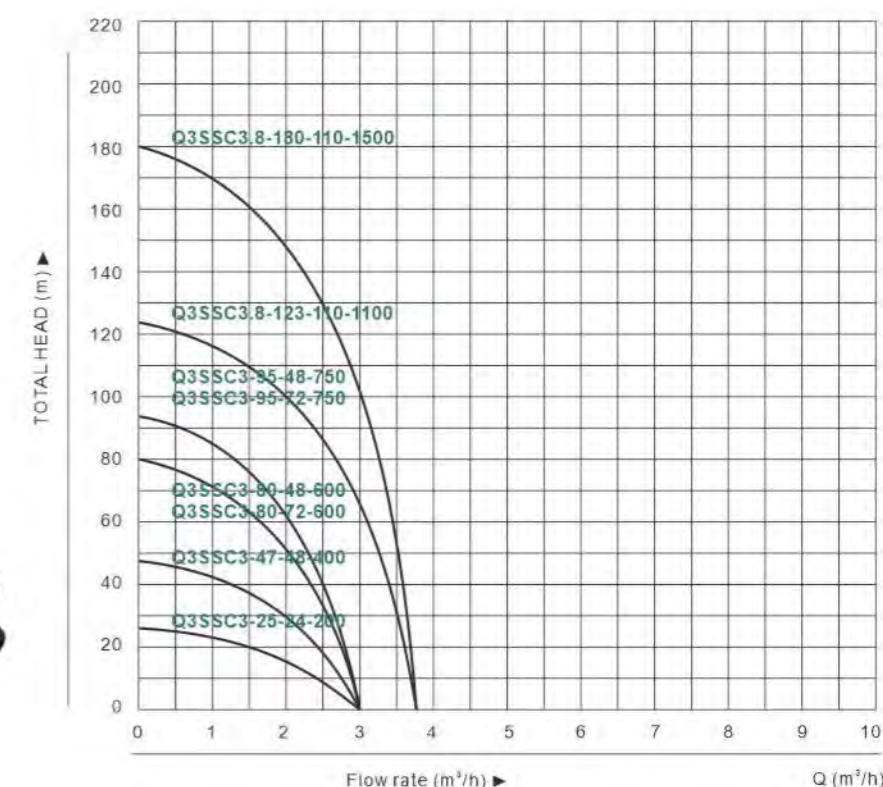


MODEL SELECTION

型号 Model	功率 Power (w)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	出水口径 Outlet (inch)
Q3SSC3-25-24-200	200	24	3	25	1"
Q3SSC3-47-48-400	400	48	3	47	
Q3SSC3-80-48-600	600	48	3	80	
Q3SSC3-80-72-600	600	72	3	80	
Q3SSC3-95-48-750	750	48	3	95	
Q3SSC3-95-72-750	750	72	3	95	
Q3SSC3.8-123-110-1100	1100	110	3.8	123	
Q3SSC3.8-180-110-1500	1500	110	3.8	180	

Q4SC

太阳能深井泵系列
Solar deep well pump series

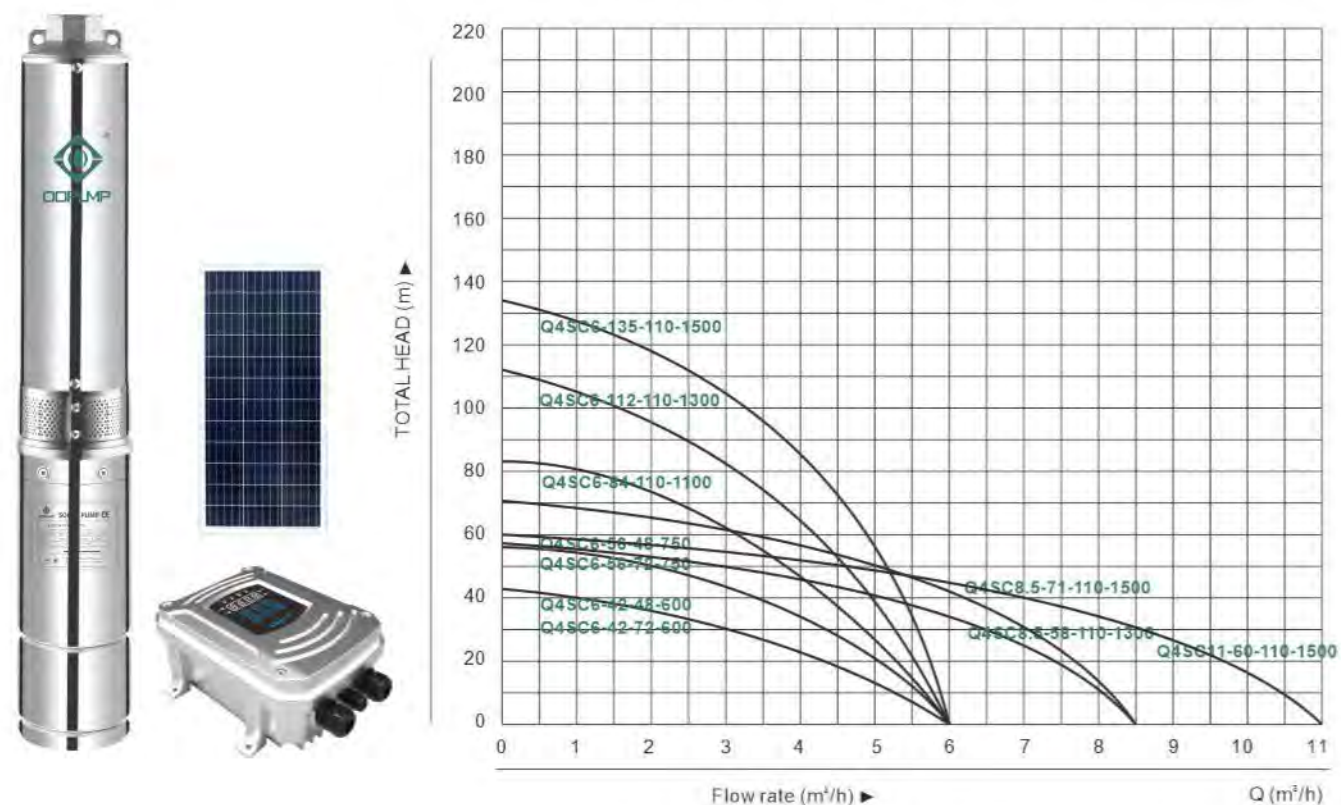


MODEL SELECTION

型号 Model	功率 Power (w)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	出水口径 Outlet (inch)
Q4SC6-42-48-600	600	48	6	42	1.25"
Q4SC6-42-72-600	600	72	6	42	
Q4SC6-56-48-750	750	48	6	56	
Q4SC6-56-72-750	750	72	6	56	
Q4SC6-84-110-1100	1100	110	6	84	
Q4SC6-112-110-1300	1300	110	6	112	
Q4SC6-135-110-1500	1500	110	6	135	1.5"
Q4SC8.5-58-110-1300	1300	110	8.5	58	
Q4SC8.5-71-110-1500	1500	110	8.5	71	
Q4SC11-60-110-1500	1500	110	11	60	

Q4SSC

太阳能深井泵系列
Solar deep well pump series

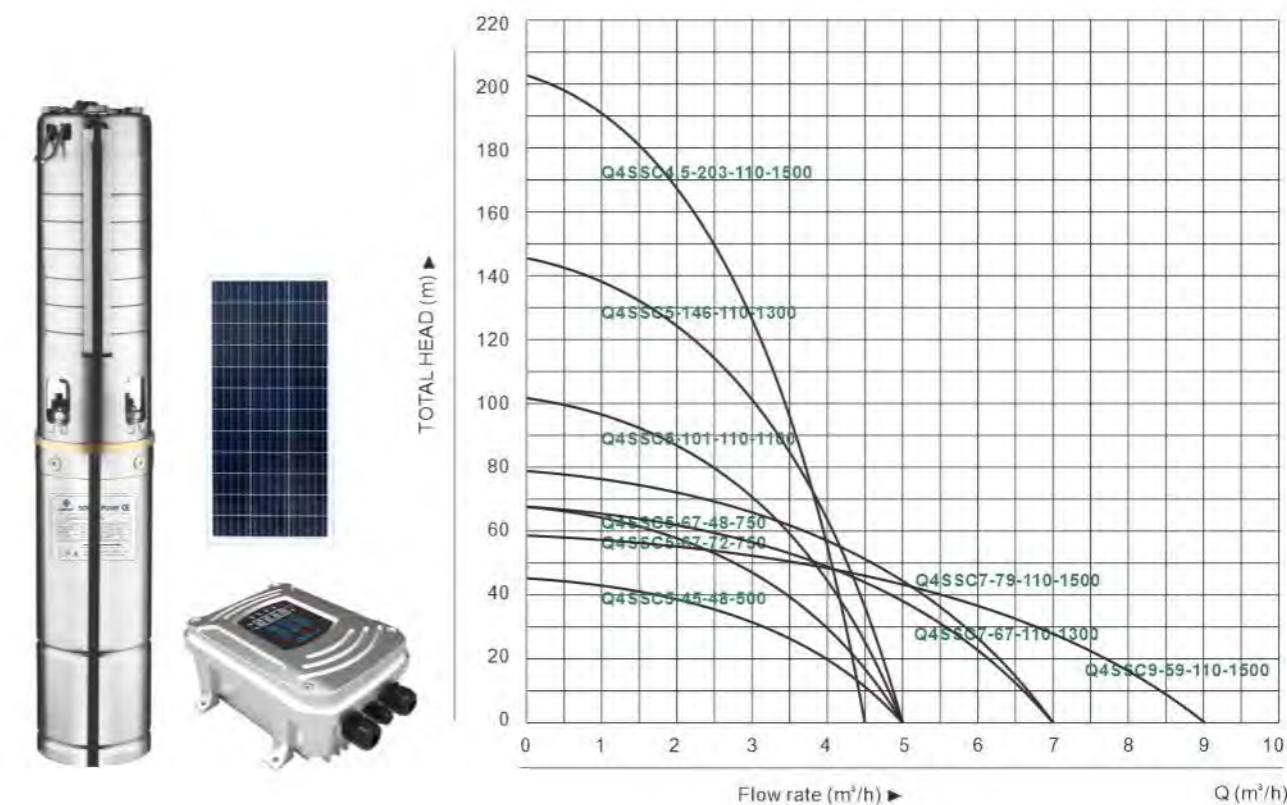

MODEL SELECTION

型号 Model	水泵 Pump	功率 Power (w)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	出水口径 Outlet (inch)
Q4SSC5-45-48-500	4SP2/4	500	48	5	45	1.25"
Q4SSC5-67-48-750	4SP2/6	750	48	5	67	
Q4SSC5-67-72-750	4SP2/6	750	72	5	67	
Q4SSC5-101-110-1100	4SP2/9	1100	110	5	101	
Q4SSC5-146-110-1300	4SP2/13	1300	110	5	146	
Q4SSC4.5-203-110-1500	4SP2/18	1500	110	4.5	203	
Q4SSC7-67-110-1300	4SP3/6	1300	110	7	67	1.5"
Q4SSC7-79-110-1500	4SP3/7	1500	110	7	79	
Q4SSC9-59-110-1500	4SP5/5	1500	110	9	59	

3SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

- For water supply from wells or reservoirs
- For domestic use, for civil and industrial applications
- For garden use and irrigation

Operating Conditions

- Maximum fluid temperature up to +35°C
- Maximum sand content: 0.25%
- Maximum immersion: 80m
- Maximum well diameter: 3"


Motor and Pump

- 100% copper wire motor
- Single phase: 220V-240V/50HZ
- Three phase: 380V-415V/50HZ
- Equip with start control box or digital auto-control box
- Pumps are designed by casing stressed

Options on Request


- Special mechanical seal
- Other voltage or frequency 60HZ
- Single phase motor with built-in capacitor

Series Products Model Example

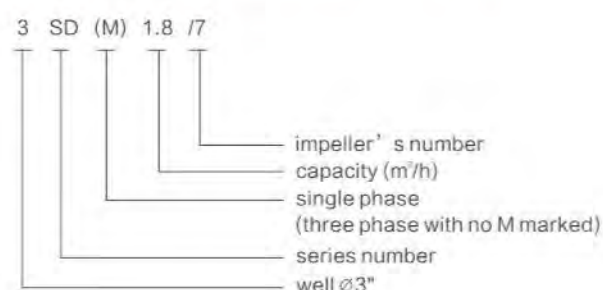

3SD1.8

不锈钢井用潜水泵系列
stainless steel well submersible pump series

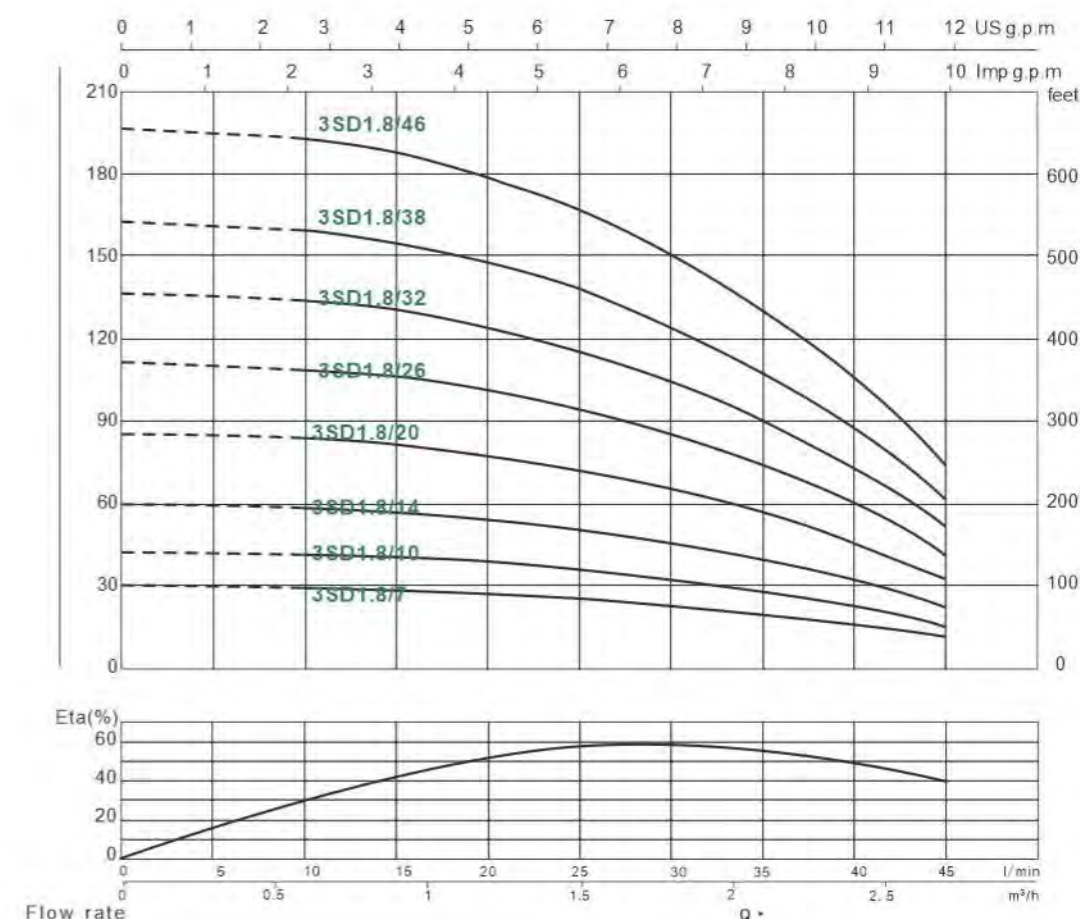


3SD(M)1.8 PERFORMANCE DATA 50Hz

型号 Model	功率 Power	流量(T/h) Flow rate	输出 Delivery											
			n=2850r/min											
220V-240V	380V-415V	KW	HP	M³/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7
				l/min	0	5	10	15	20	25	30	35	40	45
3SDM1.8/7	3SD1.8/7	0.18	0.25	扬程(m) Range of lift	30	30	29	29	27	25	23	20	16	11
3SDM1.8/10	3SD1.8/10	0.25	0.33		43	42	42	41	39	36	33	28	23	16
3SDM1.8/14	3SD1.8/14	0.37	0.5		60	59	59	57	54	51	46	40	32	23
3SDM1.8/20	3SD1.8/20	0.55	0.75		86	85	84	82	78	73	66	57	46	32
3SDM1.8/26	3SD1.8/26	0.75	1		111	110	109	106	101	94	85	73	60	42
3SDM1.8/32	3SD1.8/32	1.1	1.5		137	136	134	131	125	116	105	90	74	51
3SDM1.8/38	3SD1.8/38	1.3	1.75		163	161	159	155	148	138	125	107	88	61
3SDM1.8/46	3SD1.8/46	1.5	2		197	195	193	188	179	167	151	130	106	74

3SD2.5

不锈钢井用潜水泵系列
stainless steel well submersible pump series

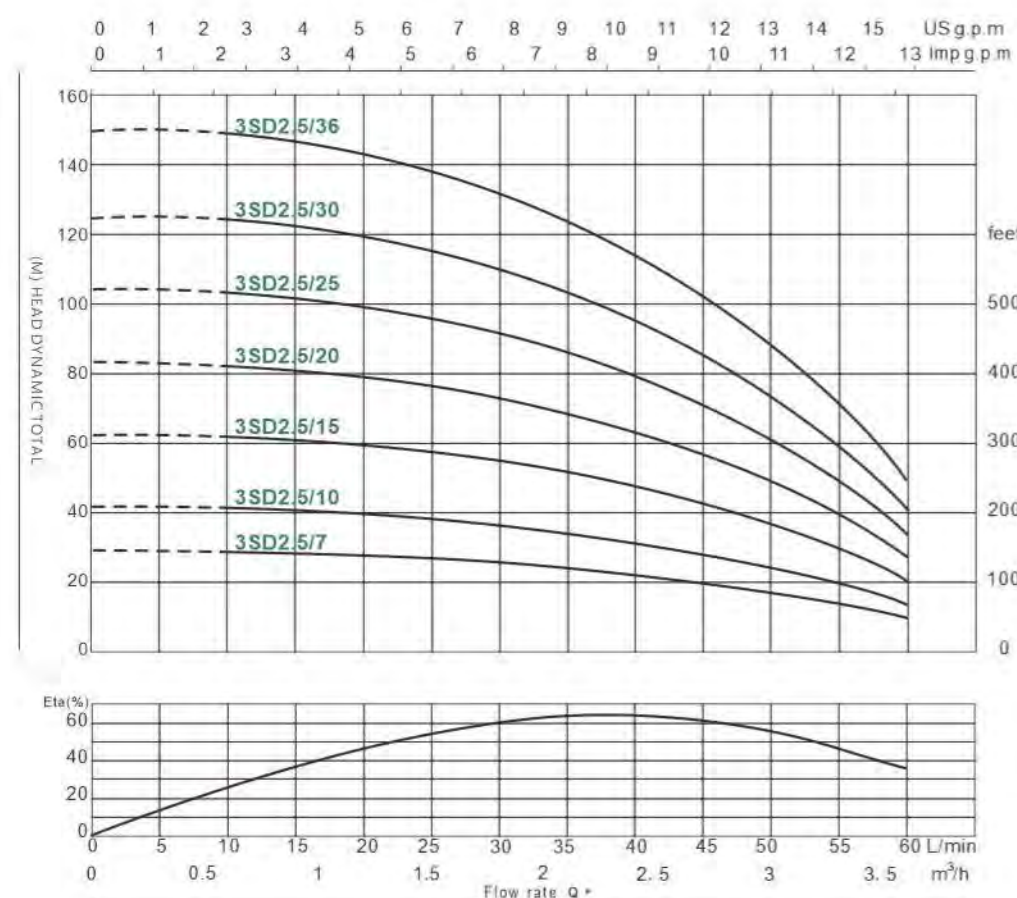


3SD(M)2.5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery										n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	l/min	0	0.3	0.6	1.2	1.5	1.8	2.1	2.4	3	3.6		
3SDM2.5/7	3SD2.5/7	0.25	0.33	扬程(m) Range of lift	30	29	29	28	28	27	25	22	17	10			
3SDM2.5/10	3SD2.5/10	0.37	0.5		43	42	42	41	40	39	36	32	24	14			
3SDM2.5/15	3SD2.5/15	0.55	0.75		60	63	62	61	60	59	54	45	37	20			
3SDM2.5/20	3SD2.5/20	0.75	1		86	84	83	81	80	78	72	64	49	27			
3SDM2.5/25	3SD2.5/25	1.1	1.5		112	105	104	101	100	98	90	83	61	34			
3SDM2.5/30	3SD2.5/30	1.3	1.75		138	126	125	122	120	117	108	102	73	41			
3SDM2.5/36	3SD2.5/36	1.5	2		163	151	149	146	144	140	130	122	88	49			

3SD3.5

不锈钢井用潜水泵系列
stainless steel well submersible pump series

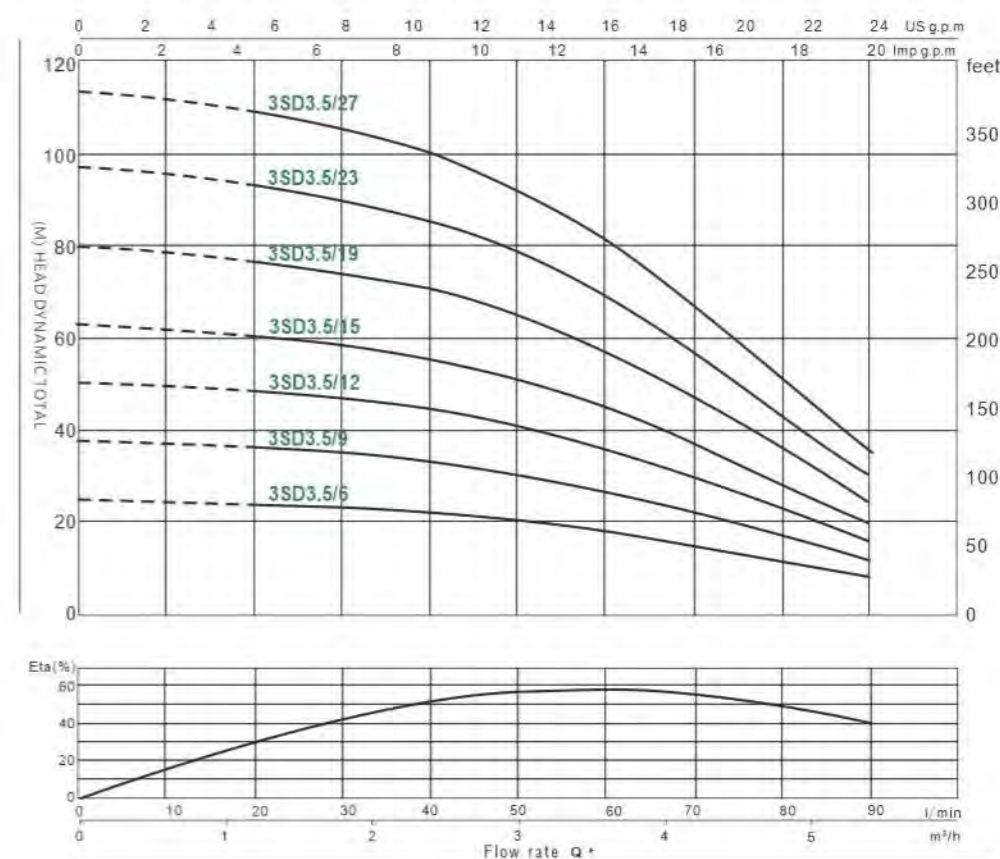

3SD(M)3.5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery										n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	l/min	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4		
3SDM3.5/6	3SD3.5/6	0.25	0.33	扬程(m) Range of lift	26	25	24	23	22	20	18	17	12	8			
3SDM3.5/9	3SD3.5/9	0.37	0.5		39	38	36	35	32	31	27	25	18	13			
3SDM3.5/12	3SD3.5/12	0.55	0.75		52	50	48	47	43	41	36	34	24	17			
3SDM3.5/15	3SD3.5/15	0.75	1		65	63	60	59	54	51	45	42	30	21			
3SDM3.5/19	3SD3.5/19	1.1	1.5		82	80	76	74	68	65	57	53	38	27			
3SDM3.5/23	3SD3.5/23	1.3	1.75		99	97	92	90	83	78	69	64	46	32			
3SDM3.5/27	3SD3.5/27	1.5	2		116	113	108	105	97	92	81	76	54	38			

3.5SD

不锈钢井用潜水泵系列
stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃
Maximum sand content: 0.25%
Maximum immersion: 80m
Maximum well diameter: 3.5"

Motor and Pump


100% copper wire motor
Single phase: 220V-240V/50HZ
Three phase: 380V-415V/50HZ
Equip with start control box or digital auto-control box
Pumps are designed by casing stressed

Options on Request

Special mechanical seal
Other voltage or frequency 60HZ
Single phase motor with built-in capacitor


Series Products Model Example

3.5 SD (M) 2 / 8

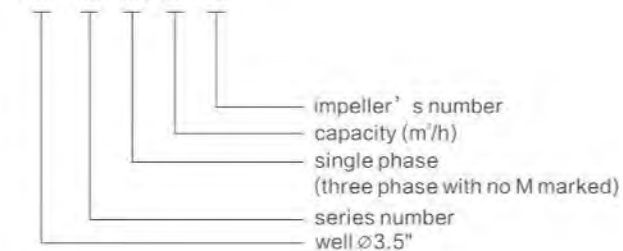

3.5SD2

不锈钢井用潜水泵系列
stainless steel well submersible pump series

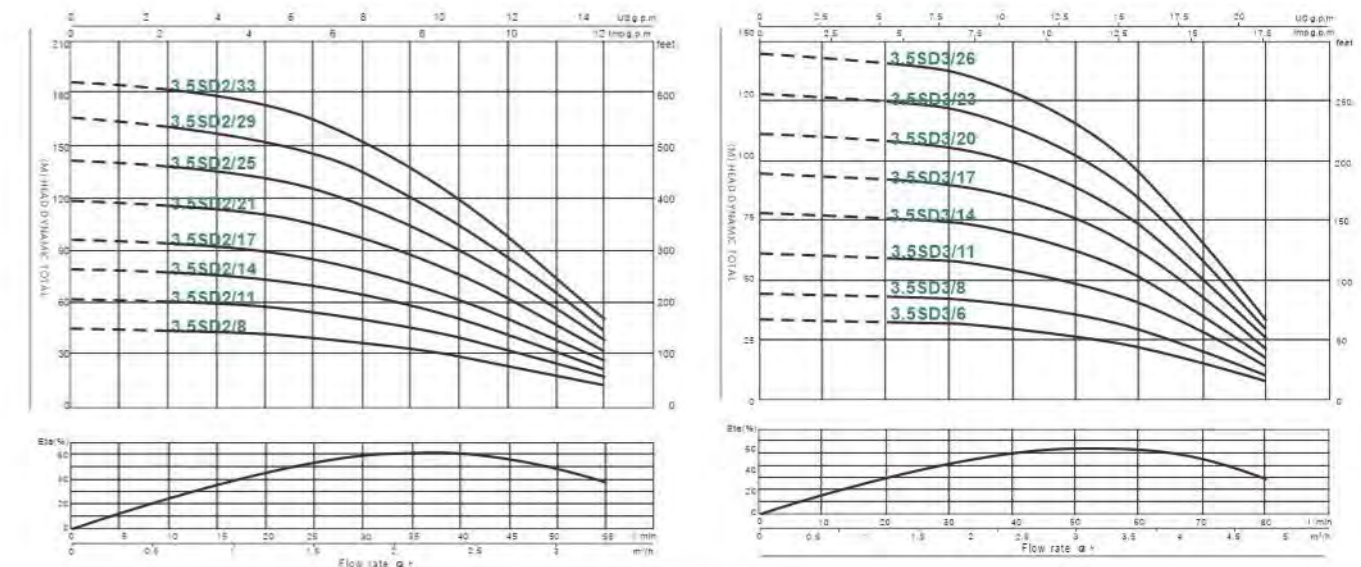

3.5SD(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery												n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3			
				l/min	0	5	10	15	20	25	30	35	40	45	50	55			
3.5SDM2/8	3.5SD2/8	0.25	0.33	扬程(m) Range of lift	45	44	43	42	40	38	37	33.6	30	24	18	12			
3.5SDM2/11	3.5SD2/11	0.37	0.5		62	61	59	58	55	52	51	46	41	33	25	17			
3.5SDM2/14	3.5SD2/14	0.55	0.75		78	77	76	74	70	66	64	59	52	42	32	21			
3.5SDM2/17	3.5SD2/17	0.75	1		95	94	92	90	85	80	78	71	63	51	39	26			
3.5SDM2/21	3.5SD2/21	1.1	1.5		118	116	113	111	105	99	97	88	78	63	48	32			
3.5SDM2/25	3.5SD2/25	1.3	1.75		140	138	135	133	125	118	115	105	93	75	58	38			
3.5SDM2/29	3.5SD2/29	1.5	2		162	160	157	154	145	136	133	122	107	87	67	44			
3.5SDM2/33	3.5SD2/33	1.8	2.5		185	182	178	175	165	155	152	139	122	99	76	50			

3.5SD(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery								n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8		
				l/min	0	10	20	30	40	50	60	70	80		
3.5SDM3/6	3.5SD3/6	0.25	0.33	扬程(m) Range of lift	34	33	32	32	30	29	22	15	9		
3.5SDM3/8	3.5SD3/8	0.37	0.5		45	44	43	42	40	38	30	20	12		
3.5SDM3/11	3.5SD3/11	0.55	0.75		62	61	59	58	55	53	41	28	17		
3.5SDM3/14	3.5SD3/14	0.75	1		78	77	76	74	70	67	52	35	21		
3.5SDM3/17	3.5SD3/17	1.1	1.5		95	94	92	90	85	82	63	43	26		
3.5SDM3/20	3.5SD3/20	1.3	1.75		112	110	108	106	100	96	74	50	30		
3.5SDM3/23	3.5SD3/23	1.5	2		129	127	124	122	115	110	85	58	35		
3.5SDM3/26	3.5SD3/26	1.8	2.5		146	144	142	138	128	125	96	66	37		

4SD

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃
Maximum sand content: 0.25%
Maximum immersion: 80m
Minimum well diameter: 4"


Motor and Pump

100% copper wire motor
Single phase: 220V~240V/50HZ
Three phase: 380V~415V/50HZ
Equip with start control box or digital auto-control box

Options on Request

Special mechanical seal
Other voltage or frequency 60HZ
Single phase motor with built-in capacitor


Series Products Model Example

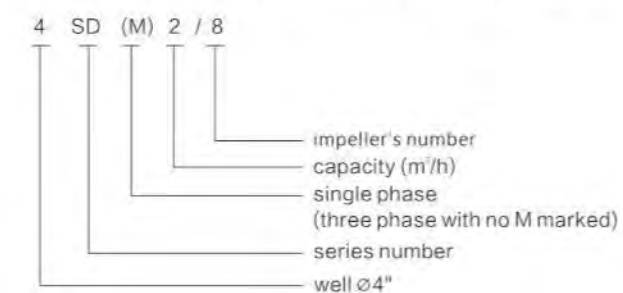

4SD2

不锈钢井用潜水泵系列

stainless steel well submersible pump series

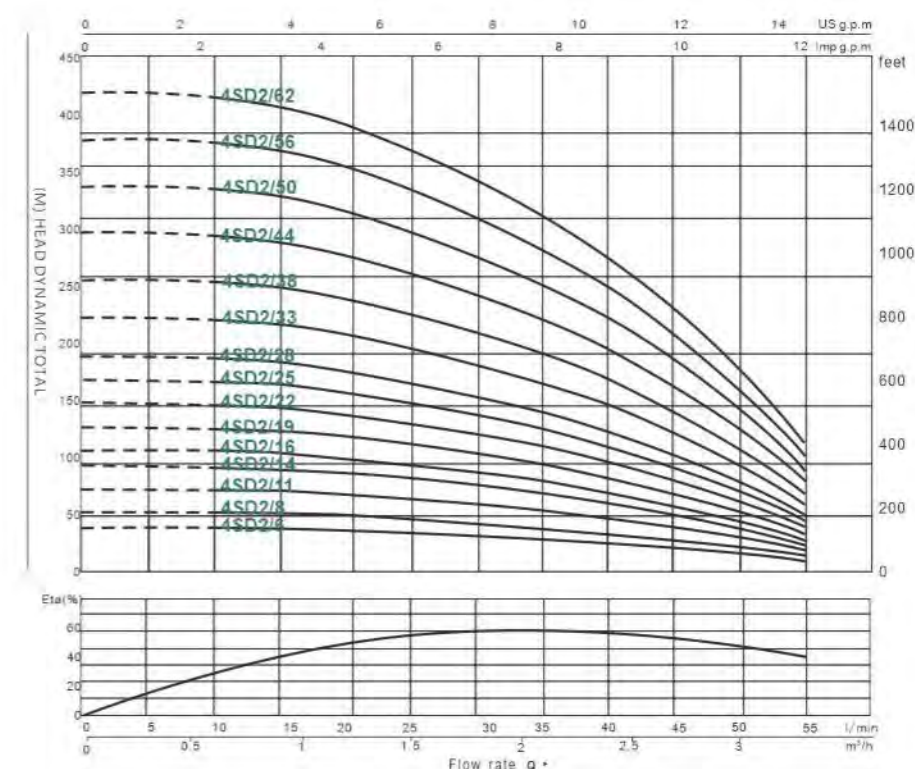


4SD(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery																n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3						
4SDM2/6	4SD2/6	0.25	0.33			42	42	42	41	39	37	35	31	28	23	18	11						
4SDM2/8	4SD2/8	0.37	0.5			56	56	56	55	53	50	46	42	37	31	24	15						
4SDM2/11	4SD2/11	0.55	0.75			77	77	77	75	72	68	63	58	51	43	33	21						
4SDM2/14	4SD2/14	0.75	1			98	98	98	96	92	87	81	73	65	54	42	27						
4SDM2/16	4SD2/16	0.92	1.25			112	113	111	110	105	99	92	84	74	62	48	30						
4SDM2/19	4SD2/19	1.1	1.5			133	134	132	130	125	118	109	100	88	74	57	36						
4SDM2/22	4SD2/22	1.3	1.75			154	155	153	151	145	137	127	115	102	85	66	42						
4SDM2/25	4SD2/25	1.5	2			175	176	174	171	165	155	144	131	116	97	75	48						
4SDM2/28	4SD2/28	1.8	2.5			196	197	195	192	184	174	161	147	130	108	84	53						
4SDM2/33	4SD2/33	2.2	3			231	232	230	226	217	205	190	173	153	128	99	63						
4SDM2/38	4SD2/38	2.2	3			266	267	265	260	250	236	219	199	176	147	114	72						
	4SD2/44	3	4			308	309	307	302	290	273	253	231	204	170	132	84						
	4SD2/50	3	4			350	352	348	343	329	310	288	262	231	194	150	95						
	4SD2/56	4	5.5			392	394	390	384	369	348	322	294	259	217	168	107						
	4SD2/62	4	5.5			434	436	432	425	408	385	357	325	287	240	186	118						

4SD3

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

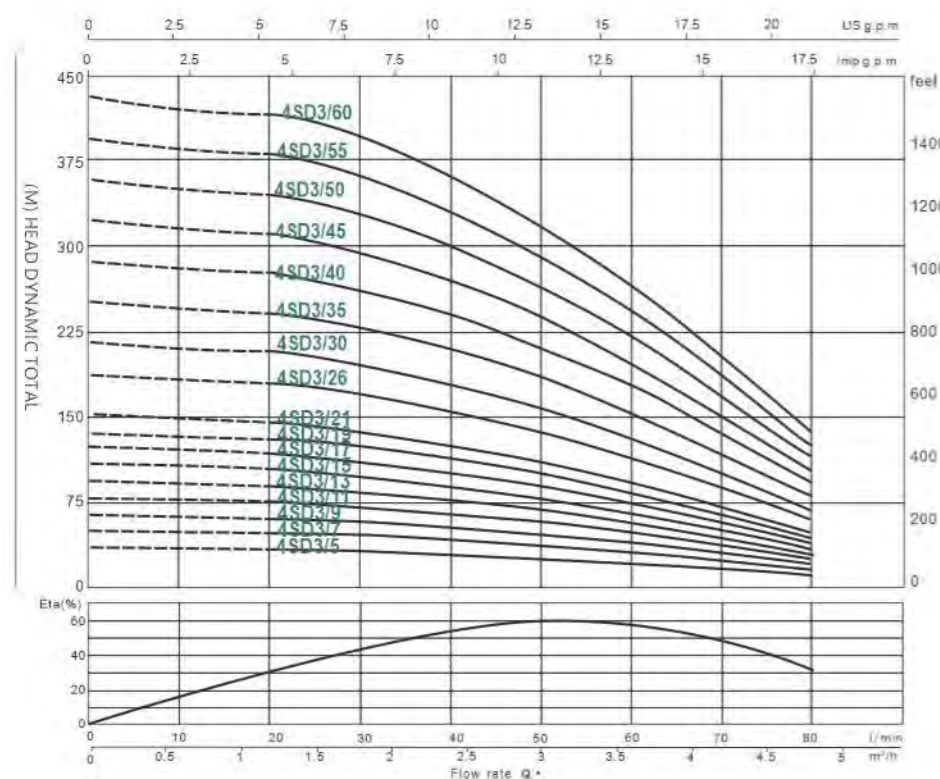


4SD(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery n=2850r/min							
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8
				l/min	0	10	20	30	40	50	60	70	80
4SDM3/5	4SD3/5	0.25	0.33	扬程(m) Range of lift	36	35	35	33	30	28	22	17	11
4SDM3/7	4SD3/7	0.37	0.5		50	49	48	46	42	39	31	24	15
4SDM3/9	4SD3/9	0.55	0.75		65	63	62	59	54	50	40	31	20
4SDM3/11	4SD3/11	0.75	1		79	77	76	72	66	61	48	37	24
4SDM3/13	4SD3/13	0.92	1.25		93	91	90	85	78	72	57	44	29
4SDM3/15	4SD3/15	1.1	1.5		108	105	104	98	90	83	66	51	33
4SDM3/17	4SD3/17	1.3	1.75		122	119	117	111	102	90	75	58	37
4SDM3/19	4SD3/19	1.5	2		136	133	131	124	114	100	84	65	42
4SDM3/21	4SD3/21	1.8	2.5		151	147	145	137	126	110	92	71.4	46
4SDM3/26	4SD3/26	2.2	3		187	182	179	169	156	140	114	88.4	57
4SDM3/30	4SD3/30	2.2	3		216	210	207	195	180	160	132	102	66
	4SD3/35	3	4		251	245	242	228	210	190	154	119	77
	4SD3/40	3	4		287	280	276	260	240	220	176	136	88
	4SD3/45	4	5.5		323	315	311	293	270	240	198	153	99
	4SD3/50	4	5.5		359	350	345	325	300	270	220	170	110
	4SD3/55	5.5	7.5		395	385	379.5	357.5	330	300	242	187	121
	4SD3/60	5.5	7.5	431	420	414	390	360	320	264	204	132	

4SD4

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

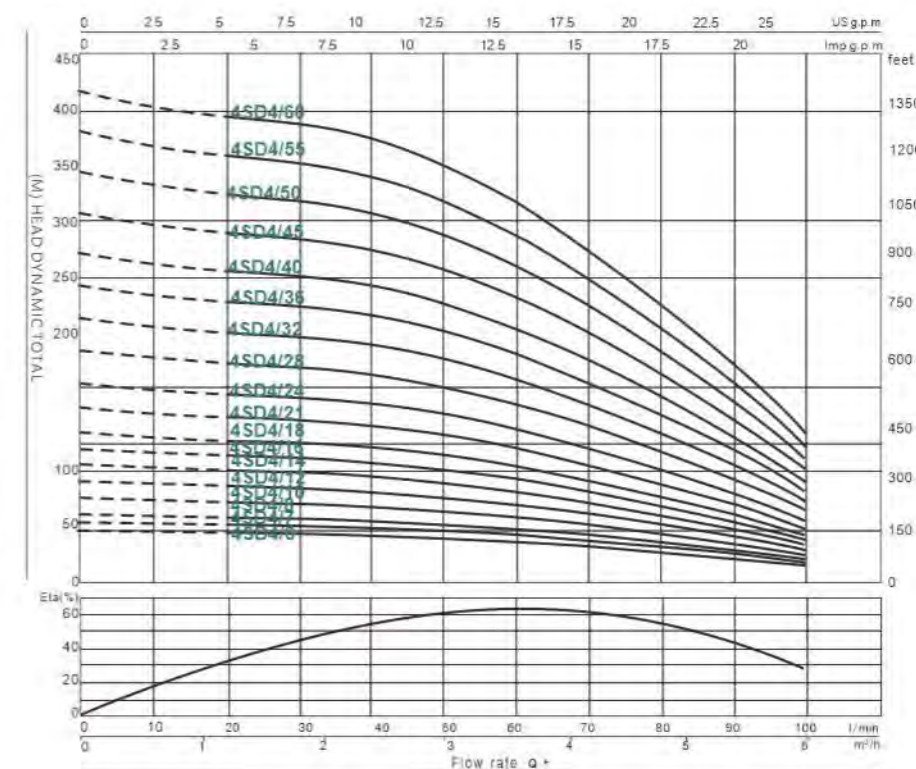


4SD(M)4 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery n=2850r/min									
220V~240V	380V~415V	KW	HP	M ³ /H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6
				l/min	0	10	20	30	40	50	60	70	80	90	100
4SDM4/6	4SD4/6	0.37	0.5	扬程(m) Range of lift	45	42	41	40	39	36	33	30	24	19	14
4SDM4/7	4SD4/7	0.55	0.75		53	49	48	46	46	42	39	35	28	22	17
4SDM4/8	4SD4/8	0.75	1		60	56	54	53	52	48	44	40	32	26	19
4SDM4/10	4SD4/10	0.92	1.25		75	70	68	66	65	60	55	50	40	32	24
4SDM4/12	4SD4/12	1.1	1.5		90	84	82	79	78	72	66	60	48	38	29
4SDM4/14	4SD4/14	1.3	1.75		105	98	95	92	91	84	77	70	56	45	34
4SDM4/16	4SD4/16	1.5	2		120	112	109	106	104	96	88	80	64	51	38
4SDM4/18	4SD4/18	1.8	2.5		135	126	122	119	117	108	99	90	72	58	43
4SDM4/21	4SD4/21	2.2	3		157.5	147	143	139	137	126	116	105	84	67	50
4SDM4/24	4SD4/24	2.2	3		180	168	163	158	156	144	132	116	96	77	55
	4SD4/28	3	4		210	196	190	185	182	168	154	136	112	90	64
	4SD4/32	3	4		240	224	218	211	208	192	176	155	128	102	73
	4SD4/36	4	5.5		270	252	245	238	234	216	198	175	144	115	82
	4SD4/40	4	5.5		300	280	272	264	260	240	220	194	160	128	91
	4SD4/45	5.5	7.5		337.5	315	306	297	293	270	248	218	180	144	103
	4SD4/50	5.5	7.5		375	350	340	330	325	300	275	243	200	160	114
	4SD4/55	7.5	10		412.5	385	374	363	357.5	330	302.5	267	224	176	126
	4SD4/60	7.5	10		450	420	408	396	390	360	330	291	244	192	137

4SD6

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

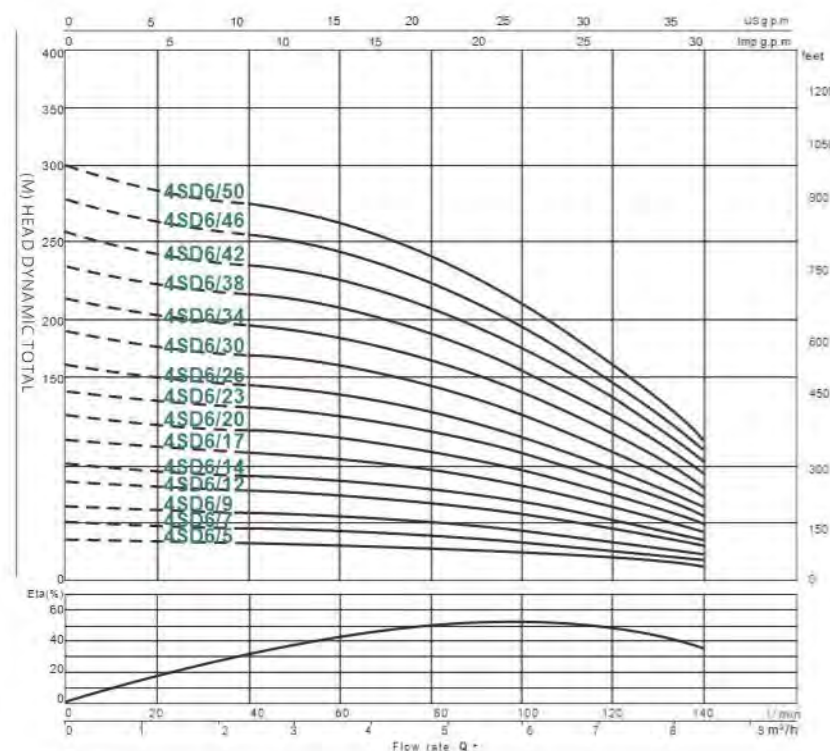


4SD(M)6 PERFORMANCE DATA 50Hz

型号 Model	功率 Power	输出 Delivery n=2850r/min									
		M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5	
220V~240V	380V~415V	KW	HP								
4SDM6/5	4SD6/5	0.37	0.5	0	20	40	60	80	100	120	140
4SDM6/6	4SD6/6	0.55	0.75	35	34	33	31	28	24	20	13
4SDM6/7	4SD6/7	0.75	1	42	40	39	37	34	28	24	15
4SDM6/8	4SD6/8	0.92	1.25	49	47	46	43	39	33	28	18
4SDM6/9	4SD6/9	1.1	1.5	56	54	52	49	45	38	32	20
4SDM6/11	4SD6/11	1.3	1.75	63	60	59	55	50	42	36	23
4SDM6/12	4SD6/12	1.5	2	77	74	72	67	62	52	44	28
4SDM6/14	4SD6/14	1.8	2.5	84	80	78	73	67	56	48	30
4SDM6/17	4SD6/17	2.2	3	98	94	91	85	78	66	56	35
4SDM6/20	4SD6/20	2.2	3	123	114	111	104	95	80	64	43
	4SD6/23	3	4	144	134	130	122	112	94	76	50
	4SD6/26	3	4	166	154	150	140	129	108	87	58
	4SD6/30	4	5.5	188	174	171	159	146	122	98	65
	4SD6/34	4	5.5	217	201	195	183	168	141	113	75
	4SD6/38	5.5	7.5	245	228	221	207	190	163	129	85
	4SD6/42	5.5	7.5	274	255	247	232	213	182	144	95
	4SD6/46	7.5	10	303	285	273	261	235	201	159	105
	4SD6/50	7.5	10	332	312	299	286	258	220	174	115
				361	339	325	311	280	239	189	125

4SD8

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

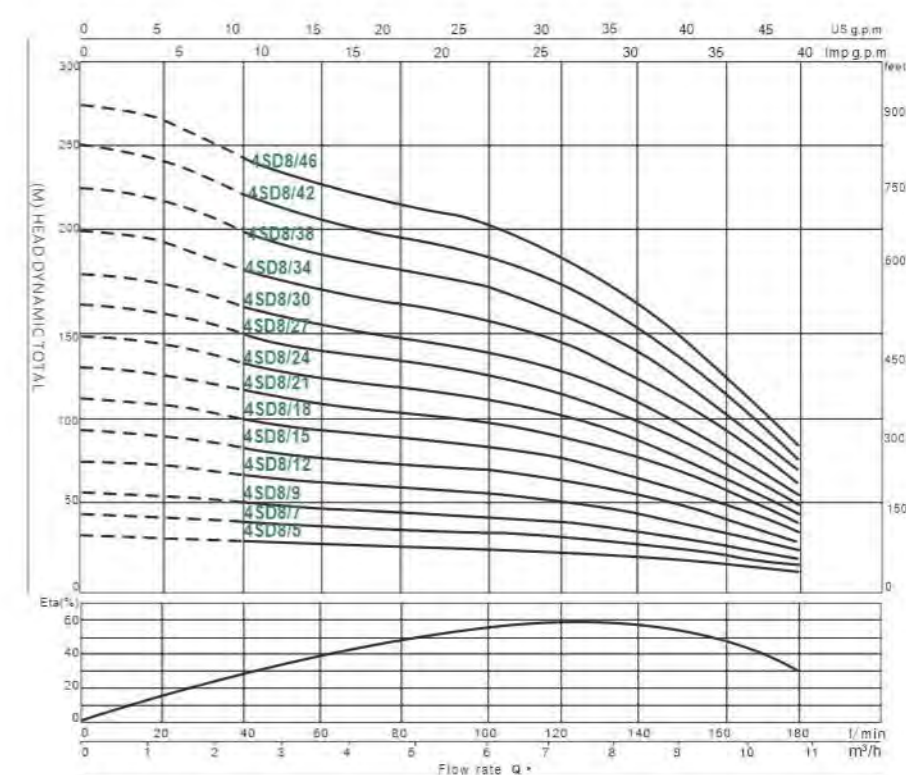


4SD(M)8 PERFORMANCE DATA 50Hz

型号 Model	功率 Power	输出 Delivery n=2850r/min											
		流量(T/h) Flow rate	M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.5	9.6	11
220V~240V	380V~415V	KW	HP										
4SDM8/5	4SD8/5	0.55	0.75	0	20	40	60	80	100	120	140	160	180
4SDM8/6	4SD8/6	0.75	1	32	31	28	26	25	24	22	18	14	9
4SDM8/7	4SD8/7	0.92	1.25	38	37	34	31	30	29	26	21	17	10.8
4SDM8/8	4SD8/8	1.1	1.5	44	43	39	36	35	34	31	25	20	12.6
4SDM8/9	4SD8/9	1.3	1.75	50	49	45	42	40	38	35	28	22	14.4
4SDM8/10	4SD8/10	1.5	2	57	56	50	47	45	43	40	32	25	16.2
4SDM8/12	4SD8/12	1.8	2.5	63	62	56	52	50	48	44	35	28	18
4SDM8/15	4SD8/15	2.2	3	76	74	67	62	60	58	53	42	34	21.6
4SDM8/18	4SD8/18	2.2	3	95	93	84	78	75	72	66	53	42	27
	4SD8/21	3	4	113	112	101	94	90	86	79	63	50	32.4
	4SD8/24	3	4	132	130	118	109	105	101	92	78	59	37.8
	4SD8/27	4	5.5	151	149	134	125	120	115	106	89	67	43.2
	4SD8/30	4	5.5	170	167	151	140	135	130	119	100	76	48.6
	4SD8/34	5.5	7.5	189	186	168	156	150	144	132	111	84	54
	4SD8/38	5.5	7.5	214	211	190	177	170	163	150	126	95	61.2
	4SD8/42	7.5	10	240	236	213	198	190	182	167	140	106	68.4
	4SD8/46	7.5	10	265	260	235	218	210	202	185	155	118	75.6
				290	285	258	239	230	221	202	170	129	82.8

4SD10

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

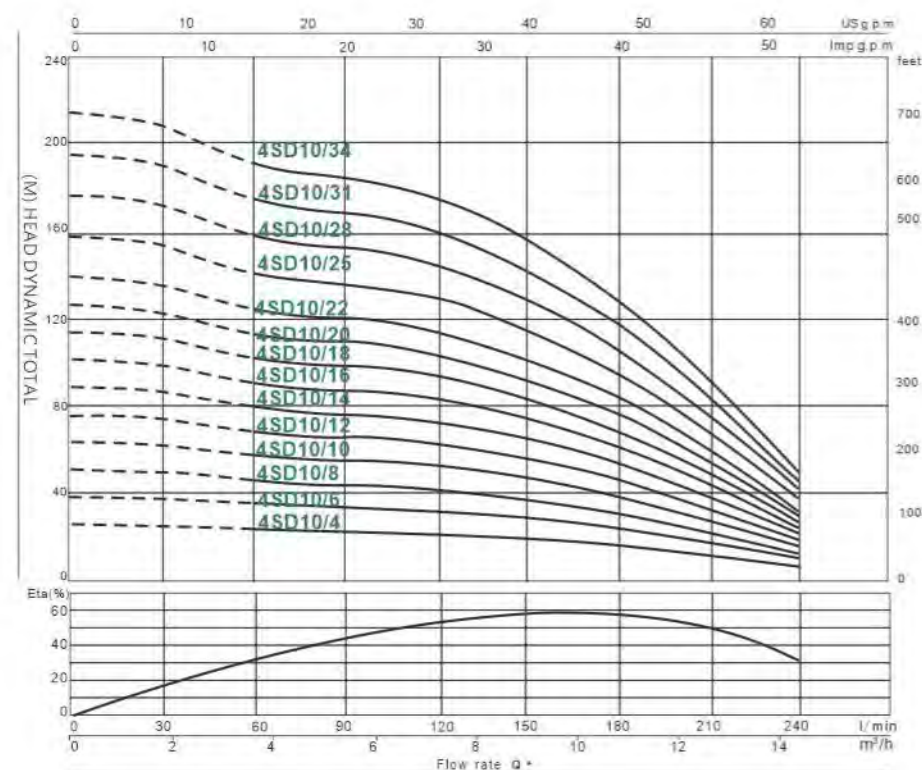


4SD(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery								n=2850r/min	
		KW	HP	M ³ /H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4		
				l/min	0	30	60	90	120	150	180	210	240		
220V~240V	380V~415V														
4SDM10/4	4SD10/4	0.75	1		25	24	23	21	20	18	15	10	6		
4SDM10/5	4SD10/5	0.92	1.25		31	30	29	27	25	23	19	13	8		
4SDM10/6	4SD10/6	1.1	1.5		37	36	35	32	30	27	23	16	9		
4SDM10/7	4SD10/7	1.3	1.75		43	42	41	37	35	32	27	18	11		
4SDM10/8	4SD10/8	1.5	2		49	48	46	42	40	36	30	21	12		
4SDM10/10	4SD10/10	1.8	2.5		62	60	58	53	50	45	38	26	15		
4SDM10/12	4SD10/12	2.2	3		74	72	70	64	60	54	46	31	18		
4SDM10/14	4SD10/14	2.2	3		86	84	81	74	70	63	53	36	21		
	4SD10/16	3	4		99	96	93	85	80	72	61	42	24		
	4SD10/18	3	4		111	108	104	95	90	81	68	47	27		
	4SD10/20	4	5.5		124	120	116	106	100	90	76	52	30		
	4SD10/22	4	5.5		136	132	128	117	110	99	84	57	33		
	4SD10/25	5.5	7.5		154	150	145	133	125	113	95	65	38		
	4SD10/28	5.5	7.5		173	168	162	148	140	126	106	73	42		
	4SD10/31	7.5	10		191	186	180	164	155	140	118	81	47		
	4SD10/34	7.5	10		210	204	197	180	170	153	129	88	51		

4SD12

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

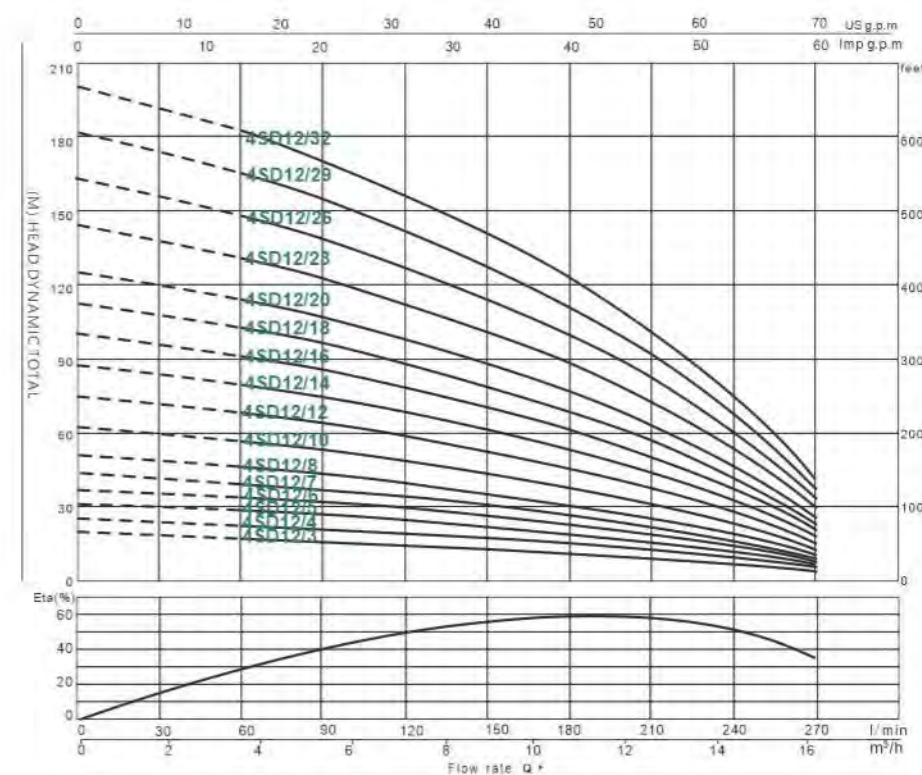


4SD(M)12 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery								n=2850r/min	
		KW	HP	M ³ /H	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4		
				l/min	0	30	60	90	120	150	180	210	240		
220V~240V	380V~415V														
4SDM12/3	4SD12/3	0.75	1		19	18	17	16	15	13	12	9	7	4.5	
4SDM12/4	4SD12/4	0.92	1.25		25	24	22	21	20	17	16	12	9	6	
4SDM12/5	4SD12/5	1.1	1.5		32	30	28	27	25	22	20	15	12	7.5	
4SDM12/6	4SD12/6	1.3	1.75		38	36	33	32	30	26	24	18	14	9	
4SDM12/7	4SD12/7	1.5	2		44	42	39	37	35	30	28	21	16	10.5	
4SDM12/8	4SD12/8	1.8	2.5		50	48	44	42	40	34	32	24	18	12	
4SDM12/10	4SD12/10	2.2	3		63	60	55	53	50	43	40	30	23	15	
4SDM12/12	4SD12/12	2.2	3		76	72	66	64	60	52	48	36	28	18	
	4SD12/14	3	4		88.2	84	77	74	70	60	56	42	32	21	
	4SD12/16	3	4		100.8	96	88	85	80	69	64	48	37	24	
	4SD12/18	4	5.5		113.4	108	99	95	90	77	72	54	41	27	
	4SD12/20	4	5.5		126	120	110	106	100	86	80	60	46	30	
	4SD12/23	5.5	7.5		144.9	138	127	122	115	99	92	69	53	34.5	
	4SD12/26	5.5	7.5		163.8	156	143	138	130	112	104	78	60	39	
	4SD12/29	7.5	10		182.7	174	166	154	142	125	116	92	67	43.5	
	4SD12/32	7.5	10		201.6	192	183	170	160	138	128	101	74	41	

4SD16

不锈钢井用潜水泵系列
stainless steel well submersible pump series

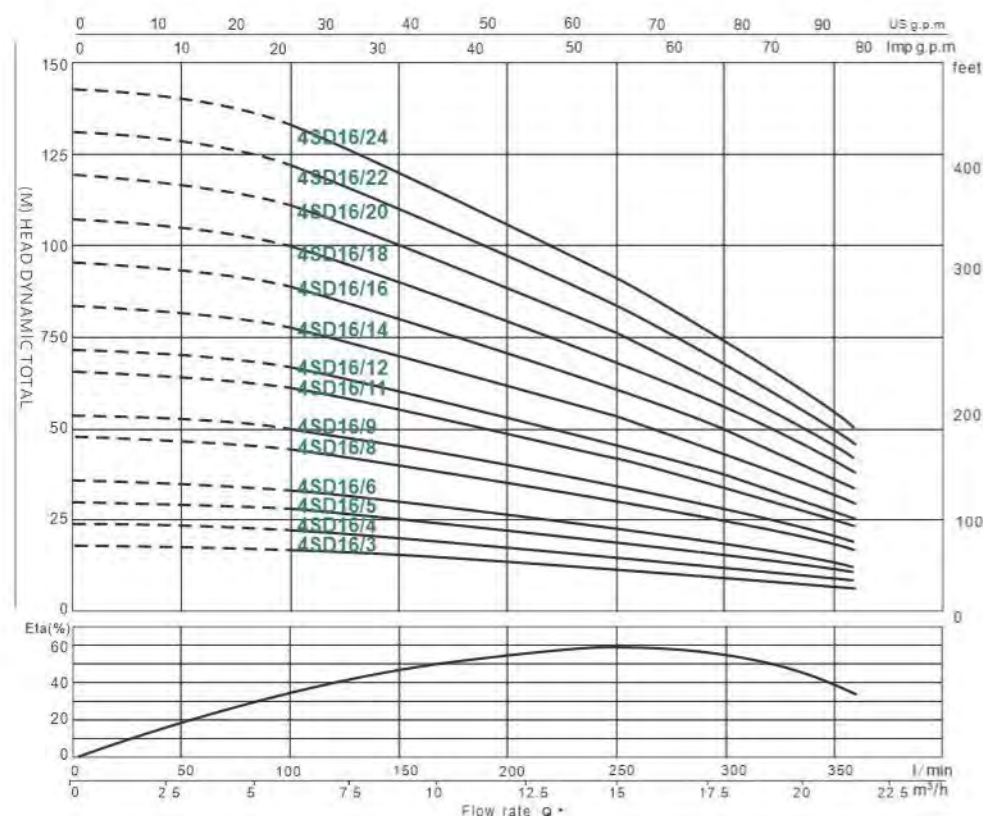

4SD(M)16 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery		n=2850r/min					
		KW	HP	M³/h l/min	0	3	6	9	12	15	18	21	
220V~240V	380V~415V				0	50	100	150	200	250	300	350	
4SDM16/3	4SD16/3	1.1	1.5	扬程(m) Range of lift	18	17	17	15	13	11	9	6	
4SDM16/4	4SD16/4	1.3	1.75		24	23	22	20	17	15	12	8	
4SDM16/5	4SD16/5	1.5	2		30	29	28	25	22	19	15	10	
4SDM16/6	4SD16/6	1.8	2.5		36	35	33	30	26	23	18	12	
4SDM16/8	4SD16/8	2.2	3		48	46	44	40	35	30	24	16	
4SDM16/9	4SD16/9	2.2	3		54	52	50	45	39	34	27	18	
	4SD16/11	3	4		66	64	61	55	48	42	33	22	
	4SD16/12	3	4		72	70	66	60	52	45	36	24	
	4SD16/14	4	5.5		84	81	77	70	61	53	42	28	
	4SD16/16	4	5.5		96	93	88	80	70	61	48	32	
	4SD16/18	5.5	7.5		108	104	99	90	78	68	54	36	
	4SD16/20	5.5	7.5		120	116	110	100	87	76	60	40	
	4SD16/22	7.5	10		132	128	121	110	96	83	66	44	
	4SD16/24	7.5	10		144	139	132	120	104	91	72	48	

4SS/4SN

不锈钢井用潜水泵系列
stainless steel well submersible pump series



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating Conditions

Maximum fluid temperature up to +35℃
Maximum sand content: 0.25%
Maximum immersion: 80m
Minimum well diameter: 4"


Motor and Pump

100% copper wire motor
Single phase: 220V~240V/50HZ
Three phase: 380V~415V/50HZ
Equip with start control box or digital auto-control box

Options on Request


Special mechanical seal
Other voltage or frequency 60HZ
Single phase motor with built-in capacitor

Series Products Model Example

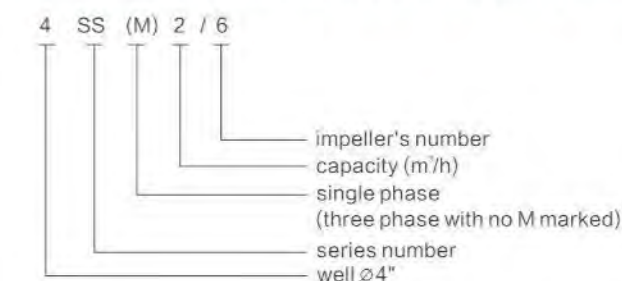

4SS2/4SN2

International Standard Standardized Information Systems

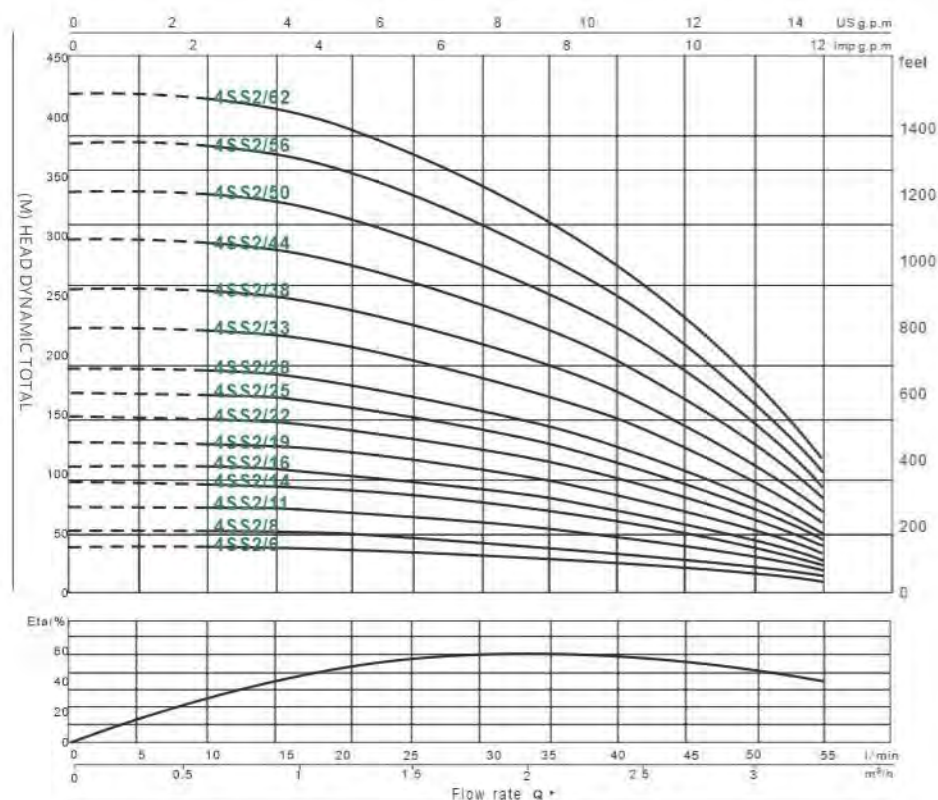


4SS(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery		n=2850r/min									
220V~240V	380V~415V	KW	HP	M³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3
				l/min	0	5	10	15	20	25	30	35	40	45	50	55
4SSM2/6	4SS2/6	0.25	0.33	扬程(m) Range of lift	42	42	41	41	40	37	35	33	29	24	18	11
4SSM2/8	4SS2/8	0.37	0.5		56	56	55	54	54	50	47	44	38	32	24	15
4SSM2/11	4SS2/11	0.55	0.75		77	76	76	75	74	68	65	61	53	44	33	21
4SSM2/14	4SS2/14	0.75	1		98	97	97	95	94	87	83	77	67	56	42	27
4SSM2/16	4SS2/16	0.92	1.25		112	111	110	109	107	99	94	88	77	64	48	30
4SSM2/19	4SS2/19	1.1	1.5		133	132	131	129	127	118	112	105	91	76	57	36
4SSM2/22	4SS2/22	1.3	1.75		154	153	152	150	147	136	130	121	106	88	66	42
4SSM2/25	4SS2/25	1.5	2		175	174	173	170	168	155	148	138	120	100	75	48
4SSM2/28	4SS2/28	1.8	2.5		196	195	193	190	188	174	165	154	134	112	84	53
4SSM2/33	4SS2/33	2.2	3		231	229	228	224	221	205	195	181.5	158	132	99	63
4SSM2/38	4SS2/38	2.2	3		266	264	262	258	255	236	224	209	182	152	114	72
	4SS2/44	3	4		308	306	304	299	295	273	260	242	211	176	132	84
	4SS2/50	3	4		350	348	345	340	335	310	295	275	240	200	150	95
	4SS2/56	4	5.5		392	389	386	381	375	347	330	308	269	224	168	106
	4SS2/62	4	5.5	434	431	428	422	415	384	366	341	298	248	186	118	

4SS3/4SN3

1. 牛奶的升力用自来水表示

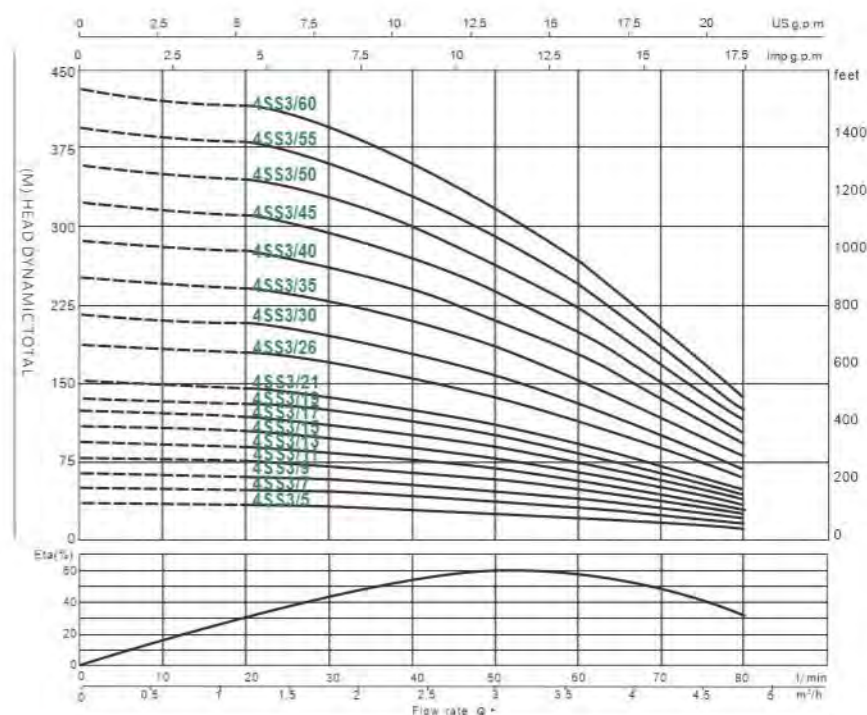


4SS(M)3 PERFORMANCE DATA 50Hz

型 号 Model		功 率 Power		流量(T/h) Flow rate	输 出 Delivery									
				n=2850r/min										
220V~240V	380V~415V	KW	HP	M ³ /H l/min	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	
				0	10	20	30	40	50	60	70	80		
4SSM3/5	4SS3/5	0.25	0.33	扬程(m) Range of lift	36	35	35	33	30	28	22	17	11	
4SSM3/7	4SS3/7	0.37	0.5		50	49	48	46	42	39	31	24	15	
4SSM3/9	4SS3/9	0.55	0.75		65	63	62	59	54	50	40	31	20	
4SSM3/11	4SS3/11	0.75	1		79	77	76	72	66	61	48	37	24	
4SSM3/13	4SS3/13	0.92	1.25		93	91	90	85	78	72	57	44	29	
4SSM3/15	4SS3/15	1.1	1.5		108	105	104	98	90	83	66	51	33	
4SSM3/17	4SS3/17	1.3	1.75		122	119	117	111	102	94	75	58	37	
4SSM3/19	4SS3/19	1.5	2		136	133	131	124	114	105	84	65	42	
4SSM3/21	4SS3/21	1.8	2.5		151	147	145	137	126	110	92	71.4	46	
4SSM3/26	4SS3/26	2.2	3		187	182	179	169	156	140	114	88.4	57	
4SSM3/30	4SS3/30	2.2	3		216	210	207	195	180	160	132	102	66	
	4SS3/35	3	4		251	245	242	228	210	190	154	119	77	
	4SS3/40	3	4		287	280	276	260	240	220	176	136	88	
	4SS3/45	4	5.5		323	315	311	293	270	240	198	153	99	
	4SS3/50	4	5.5		359	350	345	325	300	270	220	170	110	
	4SS3/55	5.5	7.5		395	385	379.5	357.5	330	300	242	187	121	
	4SS3/60	5.5	7.5	431	420	414	390	360	320	264	204	132		

4SS4/4SN4

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

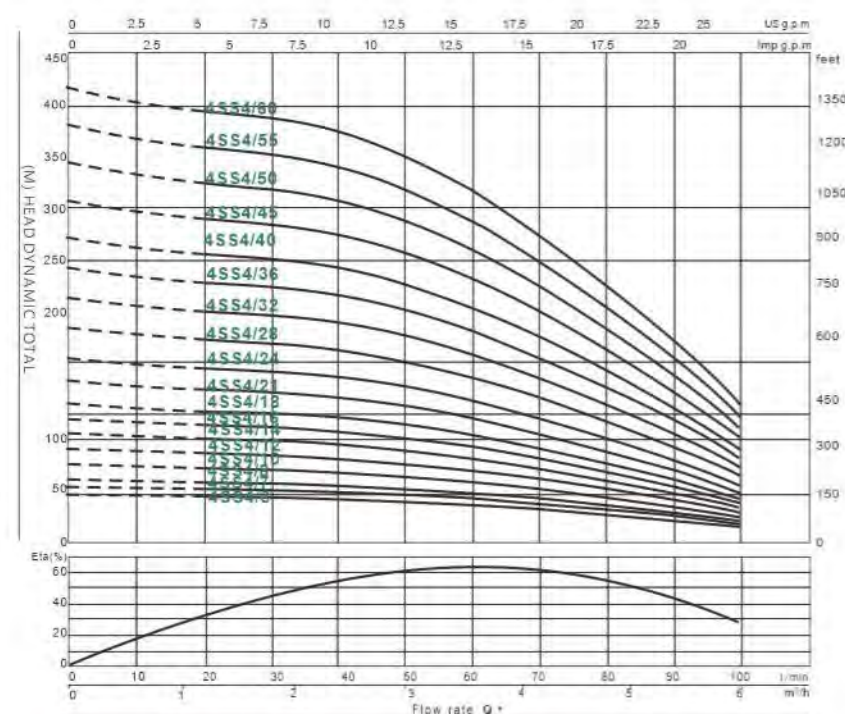


4SS(M)4 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery													n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6					
				l/min	0	10	20	30	40	50	60	70	80	90	100					
4SSM4/6	4SS4/6	0.37	0.5	扬程(m) Range of lift	45	42	41	40	39	36	33	30	24	19	14					
4SSM4/7	4SS4/7	0.55	0.75		53	49	48	46	46	42	39	35	28	22	17					
4SSM4/8	4SS4/8	0.75	1		60	56	54	53	52	48	44	40	32	26	19					
4SSM4/10	4SS4/10	0.92	1.25		75	70	68	66	65	60	55	50	40	32	24					
4SSM4/12	4SS4/12	1.1	1.5		90	84	82	79	78	72	66	60	48	38	29					
4SSM4/14	4SS4/14	1.3	1.75		105	98	95	92	91	84	77	70	56	45	34					
4SSM4/16	4SS4/16	1.5	2		120	112	109	106	104	96	88	80	64	51	38					
4SSM4/18	4SS4/18	1.8	2.5		135	126	122	119	117	108	99	90	72	58	43					
4SSM4/21	4SS4/21	2.2	3		157.5	147	143	139	137	126	116	105	84	67	50					
4SSM4/24	4SS4/24	2.2	3		180	168	163	158	156	144	132	120	96	77	58					
	4SS4/28	3	4		210	196	190	185	182	168	154	140	112	90	67					
	4SS4/32	3	4		240	224	218	211	208	192	176	160	128	102	77					
	4SS4/36	4	5.5		270	252	245	238	234	216	198	180	144	115	86					
	4SS4/40	4	5.5		300	280	272	264	260	240	220	200	160	128	96					
	4SS4/45	5.5	7.5		337.5	315	306	297	293	270	248	225	180	144	108					
	4SS4/50	5.5	7.5		375	350	340	330	325	300	275	250	200	160	120					
	4SS4/55	7.5	10		412.5	385	374	363	357.5	330	302.5	275	220	176	132					
	4SS4/60	7.5	10		450	420	408	396	390	360	330	300	240	192	144					

4SS6/4SN6

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

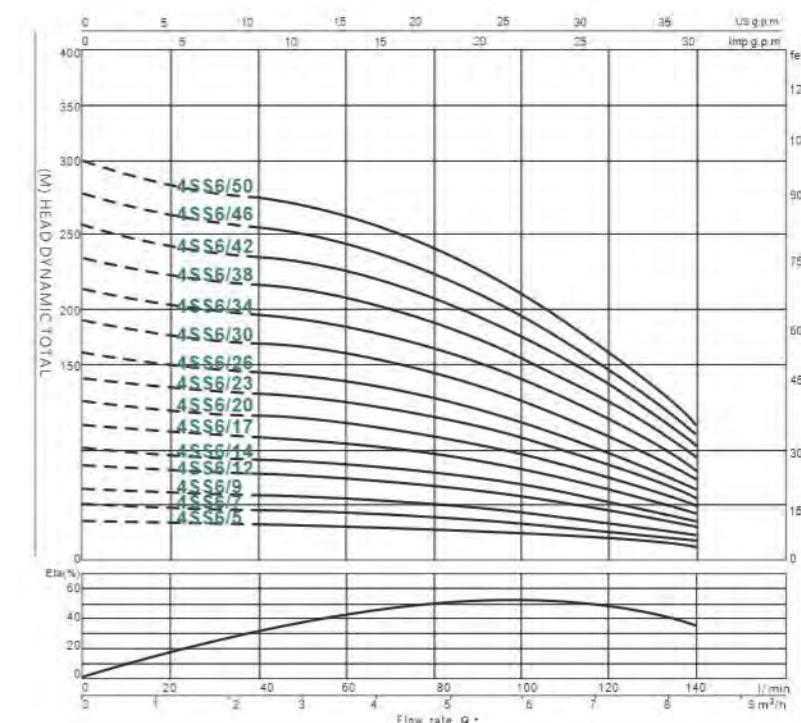


4SS(M)6 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery		n=2850r/min				
220V~240V	380V~415V	KW	HP	M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.4
				l/min	0	20	40	60	80	100	120	140
4SSM6/5	4SS6/5	0.37	0.5	扬程(m) Range of lift	35	34	33	31	28	24	20	13
4SSM6/6	4SS6/6	0.55	0.75		42	40	39	37	34	28	24	15
4SSM6/7	4SS6/7	0.75	1		49	47	46	43	39	33	28	18
4SSM6/8	4SS6/8	0.92	1.25		56	54	52	49	45	38	32	20
4SSM6/9	4SS6/9	1.1	1.5		63	60	59	55	50	42	36	23
4SSM6/11	4SS6/11	1.3	1.75		77	74	72	67	62	52	44	28
4SSM6/12	4SS6/12	1.5	2		84	80	78	73	67	56	48	30
4SSM6/14	4SS6/14	1.8	2.5		98	94	91	85	78	66	56	35
4SSM6/17	4SS6/17	2.2	3		119	114	111	104	95	80	68	43
4SSM6/20	4SS6/20	2.2	3		140	134	130	122	112	94	80	50
	4SS6/23	3	4		161	154	150	140	129	108	92	58
	4SS6/26	3	4		182	174	169	159	146	122	104	65
	4SS6/30	4	5.5		210	201	195	183	168	141	120	75
	4SS6/34	4	5.5		238	228	221	207	190	160	136	85
	4SS6/38	5.5	7.5		266	255	247	232	213	179	152	95
	4SS6/42	5.5	7.5		294	281	273	256	235	197	168	105
	4SS6/46	7.5	10		322	308	299	281	258	216	184	115
	4SS6/50	7.5	10		350	335	325	305	280	235	200	125

4SS8/4SN8

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

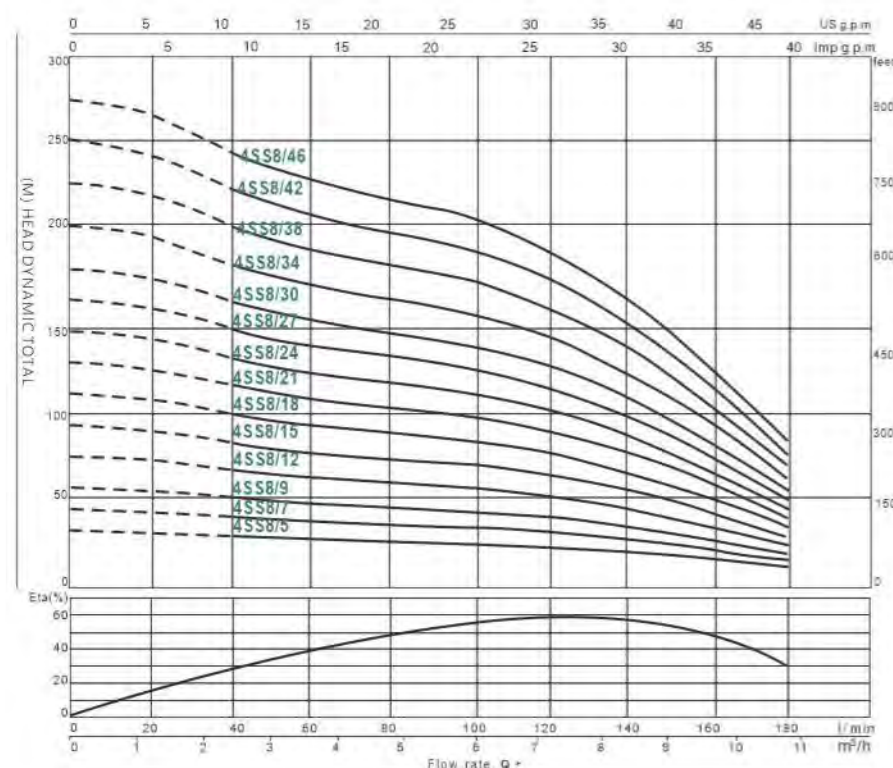


4SS(M)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery										n=2850r/min	
220V~240V	380V~415V	KW	HP	M³/H	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8		
				l/min	0	20	40	60	80	100	120	140	160	180		
4SSM8/5	4SS8/5	0.55	0.75	扬程(m) Range of lift	32	31	28	26	25	24	22	18	14	9		
4SSM8/6	4SS8/6	0.75	1		38	37	34	31	30	29	26	21	17	10.8		
4SSM8/7	4SS8/7	0.92	1.25		44	43	39	36	35	34	31	25	20	12.6		
4SSM8/8	4SS8/8	1.1	1.5		50	49	45	42	40	38	35	28	22	14.4		
4SSM8/9	4SS8/9	1.3	1.75		57	56	50	47	45	43	40	32	25	16.2		
4SSM8/10	4SS8/10	1.5	2		63	62	56	52	50	48	44	35	28	18		
4SSM8/12	4SS8/12	1.8	2.5		76	74	67	62	60	58	53	42	34	21.6		
4SSM8/15	4SS8/15	2.2	3		95	93	84	78	75	72	66	53	42	27		
4SSM8/18	4SS8/18	2.2	3		113	112	101	94	90	86	79	63	50	32.4		
	4SS8/21	3	4		132	130	118	109	105	101	92	74	59	37.8		
	4SS8/24	3	4		151	149	134	125	120	115	106	84	67	43.2		
	4SS8/27	4	5.5		170	167	151	140	135	130	119	95	76	48.6		
	4SS8/30	4	5.5		189	186	168	156	150	144	132	105	84	54		
	4SS8/34	5.5	7.5		214	211	190	177	170	163	150	119	95	61.2		
	4SS8/38	5.5	7.5		240	236	213	198	190	182	167	133	106	68.4		
	4SS8/42	7.5	10		265	260	235	218	210	202	185	147	118	75.6		
	4SS8/46	7.5	10		290	285	258	239	230	221	202	161	129	82.8		

4SS10/4SN10

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

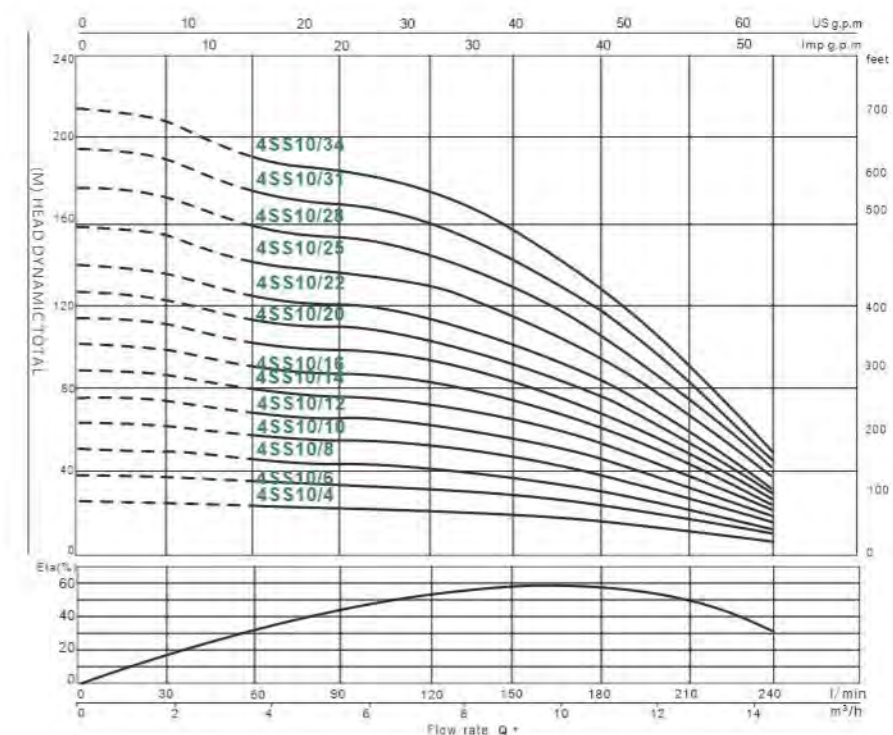


4SS(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery		n=2850r/min					
220V~240V	380V~415V	KW	HP	M³/H l/min	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4
4SSM10/4	4SS10/4	0.75	1	扬程(m) Rang of lift	0	30	60	90	120	150	180	210	240
4SSM10/5	4SS10/5	0.92	1.25		25	24	23	21	20	18	15	10	6
4SSM10/6	4SS10/6	1.1	1.5		31	30	29	27	25	23	19	13	8
4SSM10/7	4SS10/7	1.3	1.75		37	36	35	32	30	27	23	16	9
4SSM10/8	4SS10/8	1.5	2		43	42	41	37	35	32	27	18	11
4SSM10/10	4SS10/10	1.8	2.5		49	48	46	42	40	36	30	21	12
4SSM10/12	4SS10/12	2.2	3		62	60	58	53	50	45	38	26	15
4SSM10/14	4SS10/14	2.2	3		74	72	70	64	60	54	46	31	18
	4SS10/16	3	4		86	84	81	74	70	63	53	36	21
	4SS10/18	3	4		99	96	93	85	80	72	61	42	24
	4SS10/20	4	5.5		111	108	104	95	90	81	68	47	27
	4SS10/22	4	5.5		124	120	116	106	100	90	76	52	30
	4SS10/25	5.5	7.5		136	132	128	117	110	99	84	57	33
	4SS10/28	5.5	7.5		154	150	145	133	125	113	95	65	38
	4SS10/31	7.5	10		173	168	162	148	140	126	106	73	42
	4SS10/34	7.5	10		191	186	180	164	155	140	118	81	47
					210	204	197	180	170	153	129	88	51

4SS12/4SN12

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

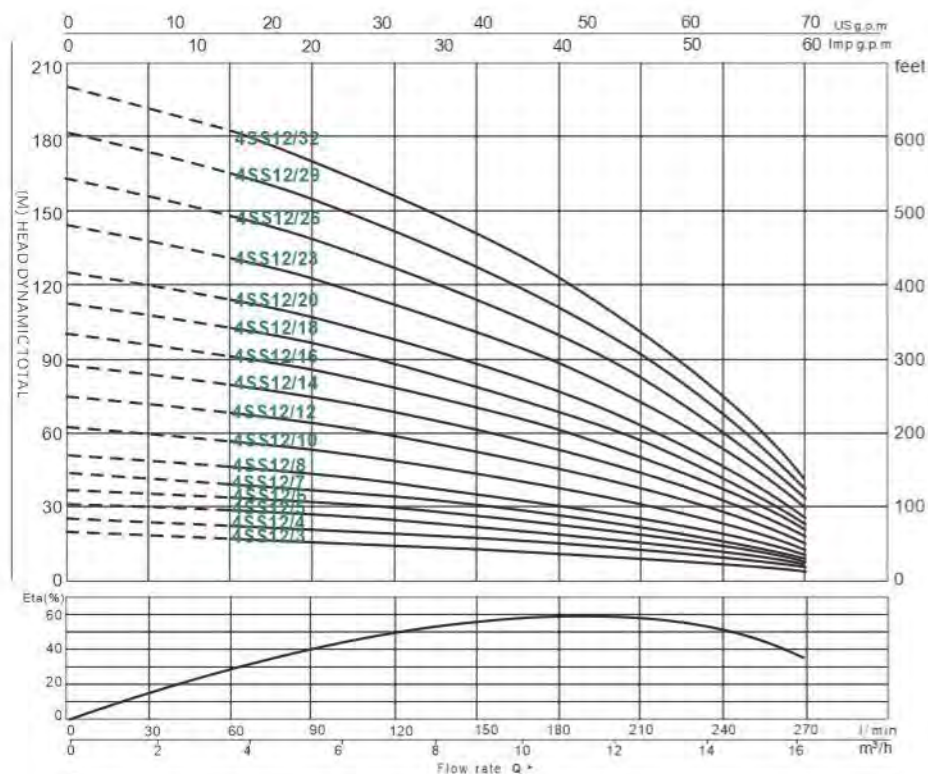


4SS(M)12 PERFORMANCE DATA 50Hz

型号 Model	功率 Power	流量(T/h) Flow rate	输出 Delivery	n=2850r/min										
				M ³ /H l/min	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16
220V~240V	380V~415V	KW	HP		0	30	60	90	120	150	180	210	240	270
4SSM12/3	4SS12/3	0.75	1	扬程(m) Range of lift	19	18	17	16	15	13	12	9	7	4.5
4SSM12/4	4SS12/4	0.92	1.25		25	24	22	21	20	17	16	12	9	6
4SSM12/5	4SS12/5	1.1	1.5		32	30	28	27	25	22	20	15	12	7.5
4SSM12/6	4SS12/6	1.3	1.75		38	36	33	32	30	26	24	18	14	9
4SSM12/7	4SS12/7	1.5	2		44	42	39	37	35	30	28	21	16	10.5
4SSM12/8	4SS12/8	1.8	2.5		50	48	44	42	40	34	32	24	18	12
4SSM12/10	4SS12/10	2.2	3		63	60	55	53	50	43	40	30	23	15
4SSM12/12	4SS12/12	2.2	3		76	72	66	64	60	52	48	36	28	18
	4SS12/14	3	4		88.2	84	77	74	70	60	56	42	32	21
	4SS12/16	3	4		100.8	96	88	85	80	69	64	48	37	24
	4SS12/18	4	5.5		113.4	108	99	95	90	77	72	54	41	27
	4SS12/20	4	5.5		126	120	110	106	100	86	80	60	46	30
	4SS12/23	5.5	7.5		144.9	138	127	122	115	99	92	69	53	34.5
	4SS12/26	5.5	7.5		163.8	156	143	138	130	112	104	78	60	39
	4SS12/29	7.5	10		182.7	174	160	154	145	125	116	87	67	43.5
	4SS12/32	7.5	10		201.6	192	176	170	160	138	128	96	74	48

4SS16/4SN16

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

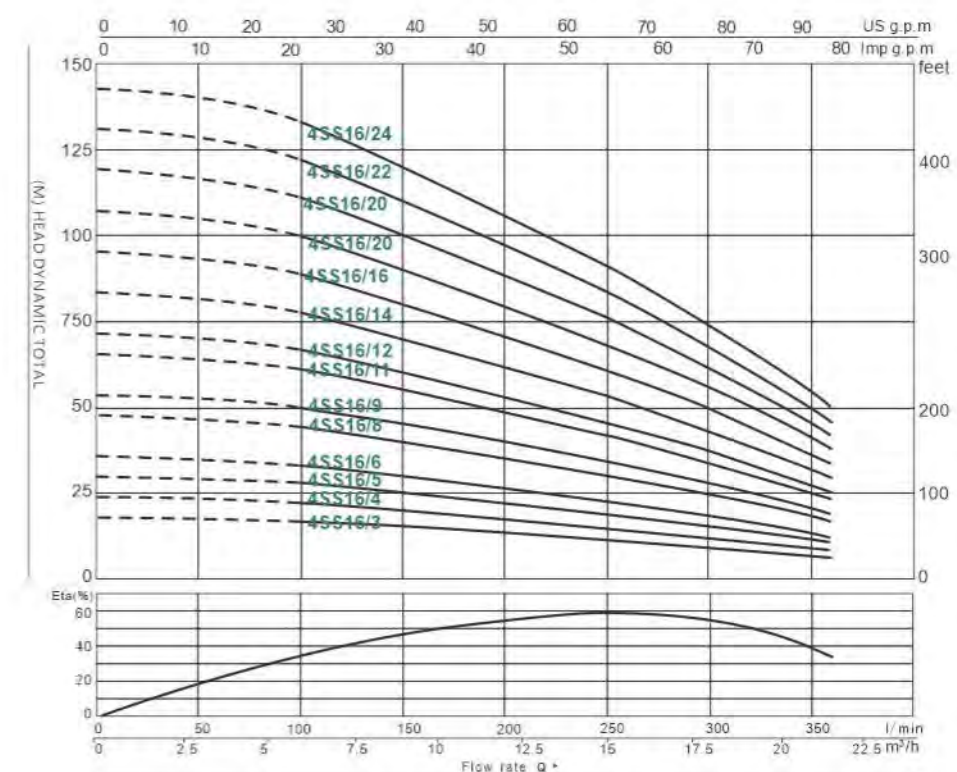

4SS(M)16 PERFORMANCE DATA 50Hz

型号 Model	功率 Power	流量(T/h) Flow rate	输出 Delivery	n=2850r/min									
				M ³ /H l/min	0	3	6	9	12	15	18	21	
220V~240V	380V~415V	KW	HP		0	50	100	150	200	250	300	350	
4SSM16/3	4SS16/3	1.1	1.5	扬程(m) Range of lift	18	17	17	15	13	11	9	6	
4SSM16/4	4SS16/4	1.3	1.75		24	23	22	20	17	15	12	8	
4SSM16/5	4SS16/5	1.5	2		30	29	28	25	22	19	15	10	
4SSM16/6	4SS16/6	1.8	2.5		36	35	33	30	26	23	18	12	
4SSM16/8	4SS16/8	2.2	3		48	46	44	40	35	30	24	16	
4SSM16/9	4SS16/9	2.2	3		54	52	50	45	39	34	27	18	
	4SS16/11	3	4		66	64	61	55	48	42	33	22	
	4SS16/12	3	4		72	70	66	60	52	45	36	24	
	4SS16/14	4	5.5		84	81	77	70	61	53	42	28	
	4SS16/16	4	5.5		96	93	88	80	70	61	48	32	
	4SS16/18	5.5	7.5		108	104	99	90	78	68	54	36	
	4SS16/20	5.5	7.5		120	116	110	100	87	76	60	40	
	4SS16/22	7.5	10		132	128	121	110	96	83	66	44	
	4SS16/24	7.5	10		144	139	132	120	104	91	72	48	

Q90QJ

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Q90QJ系列特点

- 1、体积小，全扬程，全电压，适合家用，民用；
- 2、油浸式电机，可潜水深度100米，接插式电缆，容易更换；
- 3、水泵使用环境：常温清水；
- 4、马达自动保护；
- 5、单相180V—230V/50Hz；
- 6、内置电容，使用方便。

Q90QJ Series features

- 1.Small size, full lift range, full voltage, suitable for household and commercial use;
- 2.Submersible motor that can dive to the depth or 100 meters; easily replaced plug-in cable;
- 3.Pump use environment: room temperature, clear water;
- 4.Motor automatic protection.
- 5.Single-phase 180V-230V/50Hz
- 6.Easy to use built-in cupaliton.

Q90QJ系列型号示例

Series Products Model Example


Q90 QJ D 2 - 51 /12 - 0.8

- 额定功率 Rated power
- 叶轮级数 Impeller progression
- 额定扬程 Rated lift
- 额定流量 Rated flow rate
- 单相 (三相不标注) Single phase (three phase)
- 井用潜水电泵 Submersible pump for well
- 系列型号 Series number

Q90QJ-2T

不锈钢井用潜水泵系列

stainless steel well submersible pump series

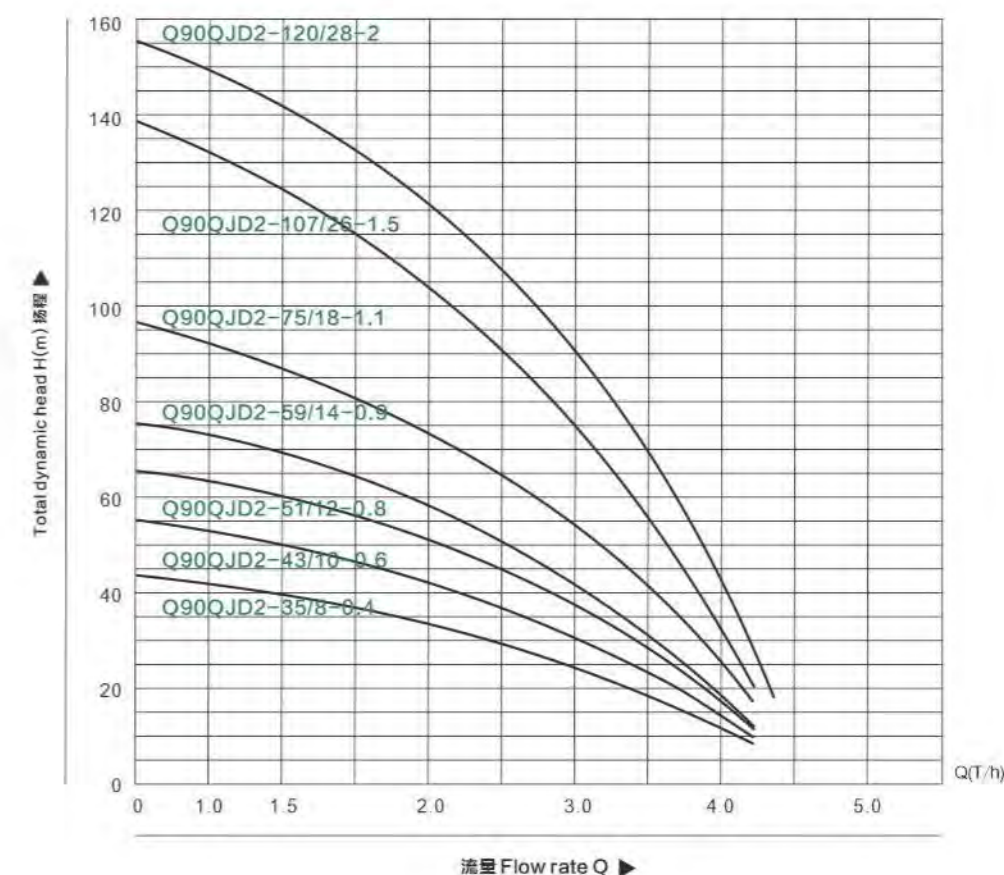


Q90QJ-2T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	1	1.5	2	3	4
Q90QJD2-35/8-0.4	220/380	0.4	1.0"	88	扬程(m) Range of lift	45	43	41	35	26	11
Q90QJD2-43/10-0.6	220/380	0.6	1.0"	88		56	53	50	43	32	15
Q90QJD2-51/12-0.8	220/380	0.8	1.0"	88		66	63	59	51	37	17
Q90QJD2-59/14-0.9	220/380	0.9	1.0"	88		77	73	69	59	43	18
Q90QJD2-75/18-1.1	220/380	1.1	1.0"	88		98	93	88	75	54	27
Q90QJD2-107/26-1.5	220/380	1.5	1.0"	88		140	133	125	107	77	36
Q90QJD2-120/28-2	220/380	2	1.0"	88		157	149	140	120	86	40

Q90QJ-3T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

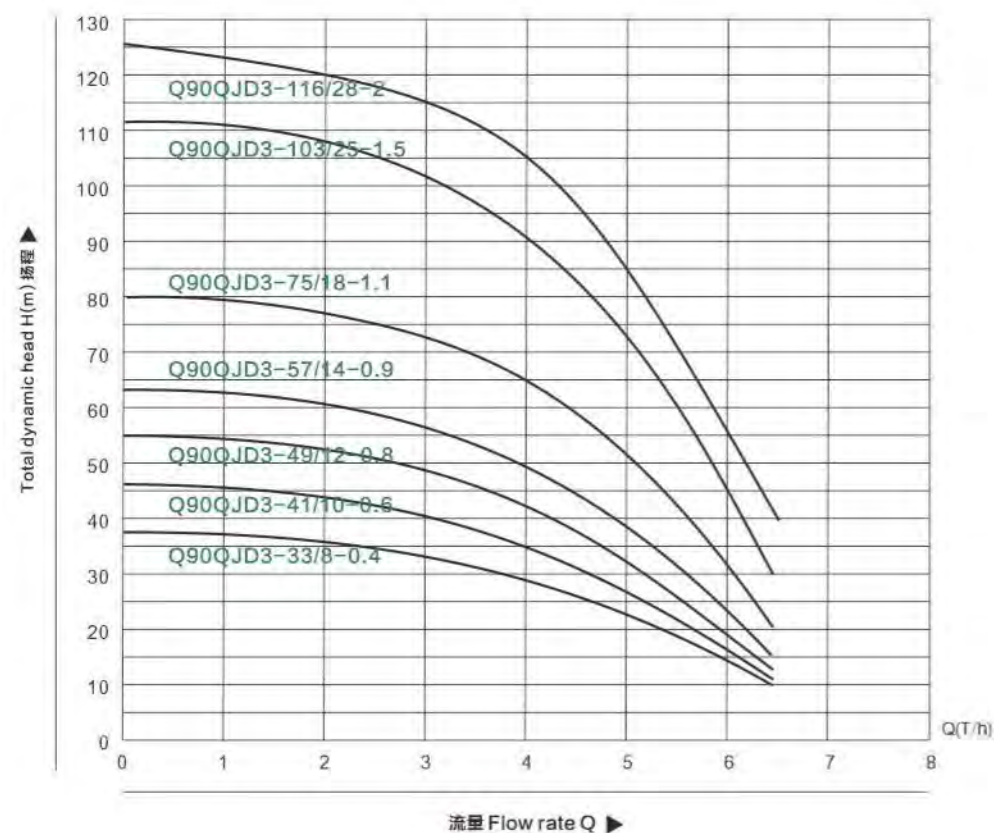

Q90QJ-3T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	2	3	4	5	6
Q90QJD3-33/8-0.4	220/380	0.4	1.0"	88	扬程(m) Range of lift	38	36	33	28	22	13
Q90QJD3-41/10-0.6	220/380	0.6	1.0"	88		46	44	41	35	26	17
Q90QJD3-49/12-0.8	220/380	0.8	1.0"	88		55	52	49	39	30	19
Q90QJD3-57/14-0.9	220/380	0.9	1.0"	88		63	60	57	49	37	23
Q90QJD3-75/18-1.1	220/380	1.1	1.0"	88		81	76	73	65	51	31
Q90QJD3-103/25-1.5	220/380	1.5	1.0"	88		111	107	103	91	73	49
Q90QJD3-116/28-2	220/380	2	1.0"	88		125	120	116	109	82	55

Q100QJ 不锈钢井用潜水泵系列

stainless steel well submersible pump series



Q100QJ系列特点


- 1.流量大, 全扬程, 全电压, 适合家用, 民用; (高性价比)
- 2.油浸式电机, 可潜水深度120米, 接插式电缆, 容易更换;
- 3.水泵使用环境: 常温清水;
- 4.电容内置, 安装方便;
- 5.马达自动保护
- 6.单相180V—230V/50Hz

Q100QJ Series features

- 1.Large flow rate, full lift range, full voltage, suitable for household and commercial use;(high price/performance ratio)
- 2.Submersible motor that can dive to the depth of 120 meters; easily replaced plug-in cable;
- 3.Pump use environmet; room temperature, clear water;
- 4.Built-in capacitance, easy installation;
- 5.Motor automatic protection
- 6.Single-phase 180V-230V/50Hz


Q100QJ系列型号示例

Series Products Model Example

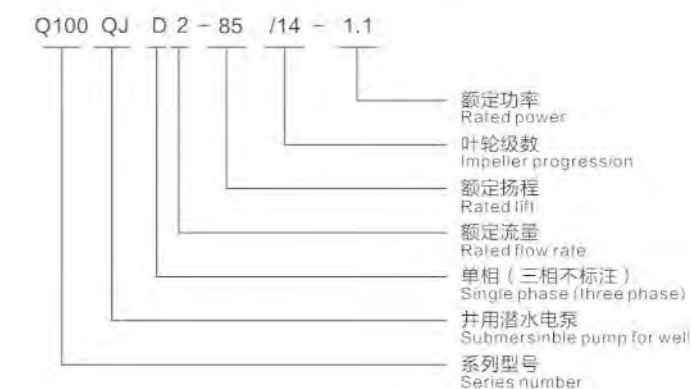

Q100QJ-2T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

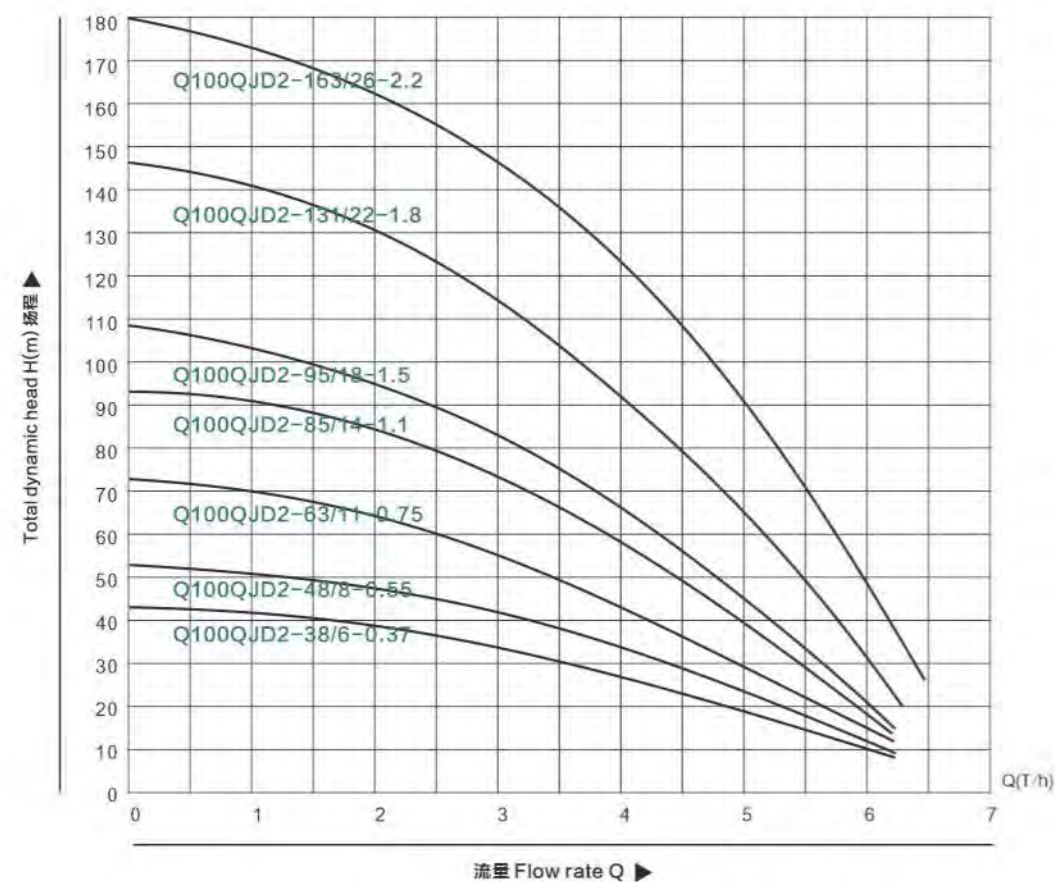


Q100QJ-2T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	1	2	3	4	5
Q100QJD2-38/6-0.37	220/380	0.37	1.0"	100	扬程(m) Range of lift	43	40	38	32	27	18
Q100QJD2-48/8-0.55	220/380	0.55	1.0"	100		53	52	48	42	33	23
Q100QJD2-63/11-0.75	220/380	0.75	1.0"	100		73	71	63	54	43	28
Q100QJD2-85/14-1.1	220/380	1.1	1.0"	100		93	89	85	72	59	38
Q100QJD2-95/18-1.5	220/380	1.5	1.0"	100		108	101	95	71	67	43
Q100QJD2-131/22-1.8	220/380	1.8	1.0"	100		146	138	131	111	91	63
Q100QJD2-163/26-2.2	220/380	2.2	1.0"	100		180	172	163	135	111	81

Q100QJ-4T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

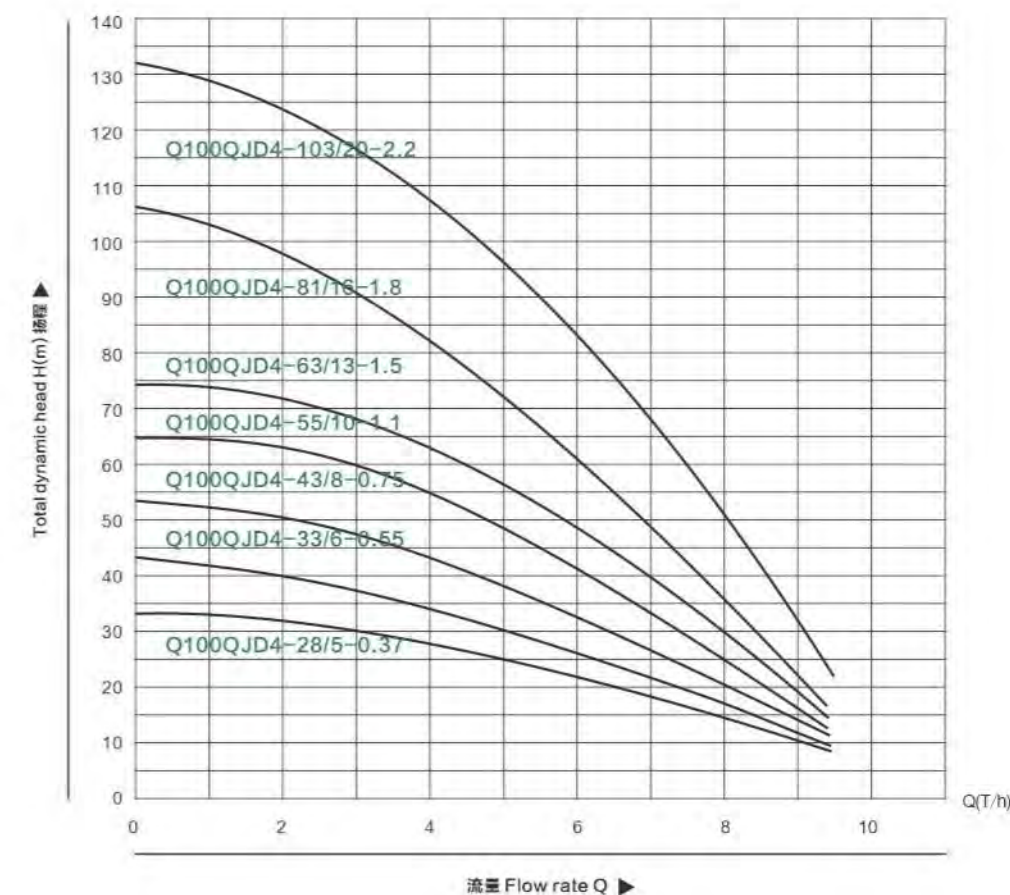


Q100JD-4T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	2	3	4	5	6	7
Q100QJD4-28/5-0.37	220/380	0.37	1.5"	100	扬程(m) Range of lift	33	30	29	28	25	21	18
Q100QJD4-33/6-0.55	220/380	0.55	1.5"	100		43	39	37	33	30	26	20
Q100QJD4-43/8-0.75	220/380	0.75	1.5"	100		53	49	47	43	38	32	25
Q100QJD4-55/10-1.1	220/380	1.1	1.5"	100		65	61	60	55	48	40	33
Q100QJD4-63/13-1.5	220/380	1.5	1.5"	100		75	71	68	63	56	48	39
Q100QJD4-81/16-1.8	220/380	1.8	1.5"	100		106	98	91	81	71	60	48
Q100QJD4-103/20-2.2	220/380	2.2	1.5"	100		132	122	113	103	89	75	60

Q100QJ-6T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

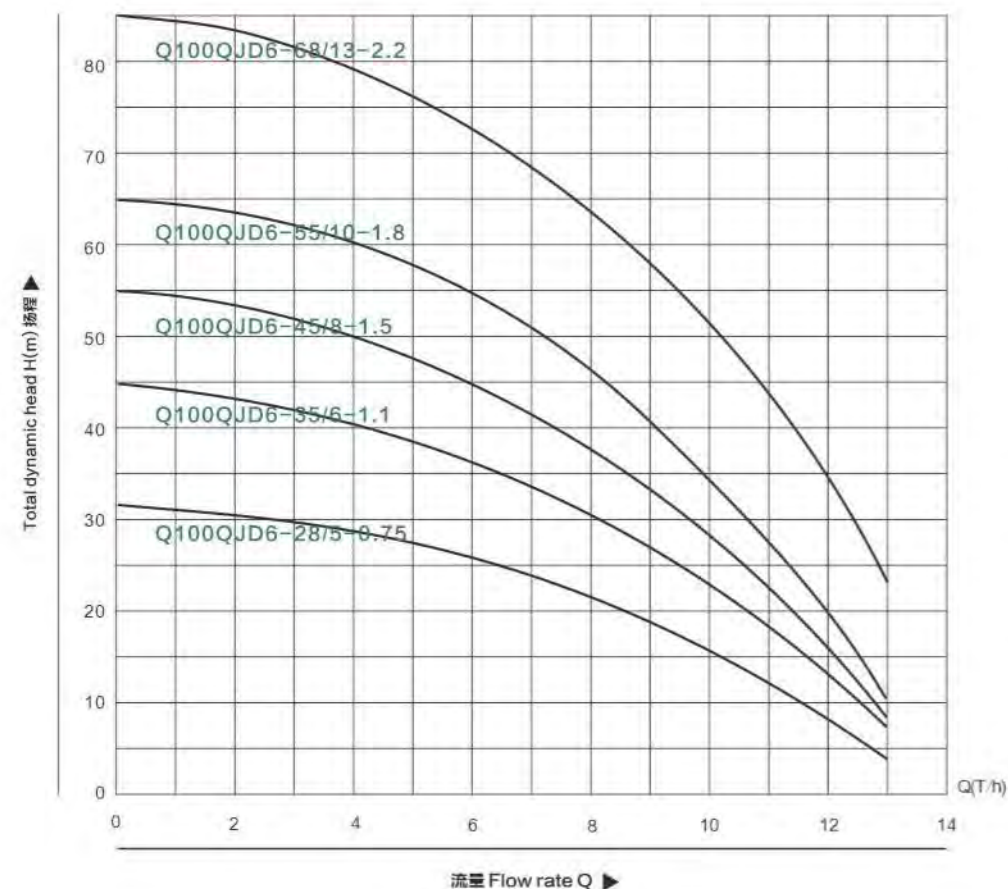

Q100JD-6T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	3	4	5	6	7	8	9
Q100QJD6-28/5-0.75	220/380	0.75	1.5"	100	扬程(m) Range of lift	33	32	31	30	28	26	24	20
Q100QJD6-35/6-1.1	220/380	1.1	1.5"	100		45	42	39	37	35	33	30	26
Q100QJD6-45/8-1.5	220/380	1.5	1.5"	100		55	51	49	47	45	40	36	33
Q100QJD6-55/10-1.8	220/380	1.8	1.5"	100		65	62	60	57	55	49	45	40
Q100QJD6-68/13-2.2	220/380	2.2	1.5"	100		85	81	78	74	68	64	58	52

T100/ST100

不锈钢井用潜水泵系列

stainless steel well submersible pump series



T100QJ系列特点


- 1.陶瓷抗沙结构，耐磨损，使用寿命长；
- 2.流量大，全扬程，全电压，适合家用，民用；（高性价比）
- 3.油浸式电机，可潜水深度120米，接插式电缆，容易更换；
- 4.水泵使用环境：常温清水；
- 5.电容内置，安装方便；
- 6.马达自动保护；
- 7.单相180V—230V/50Hz。

T100QJ Series features

- 1.Ceramic anti-sand structure, wear resistance, long service life;
- 2.Large flow, full head, full voltage, suitable for home and civilian(cost-effective/high performance ratio);
3. Oil-immersed motor, dive depth of 120 meters, plug-in cable, easy to replace;
- 4.Pump use environmet; room temperature, clear water;
- 5.Capacitor built-in, easy to install;
- 6.Motor automatic protection;
- 7.Single-phase 180V-230V/50Hz.


T100QJ系列型号示例

Series Products Model Example

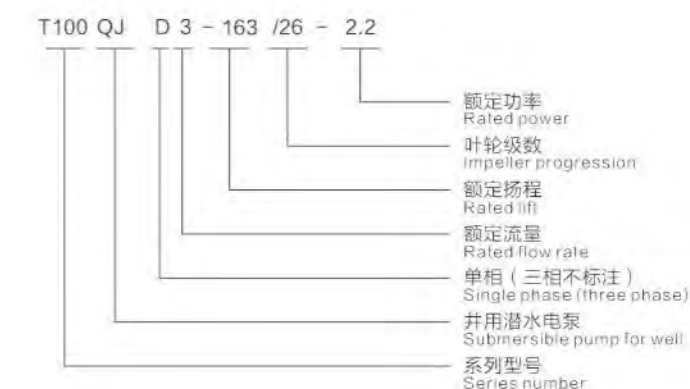

T100/ST100 QJ(D)3

不锈钢井用潜水泵系列
stainless steel well submersible pump series

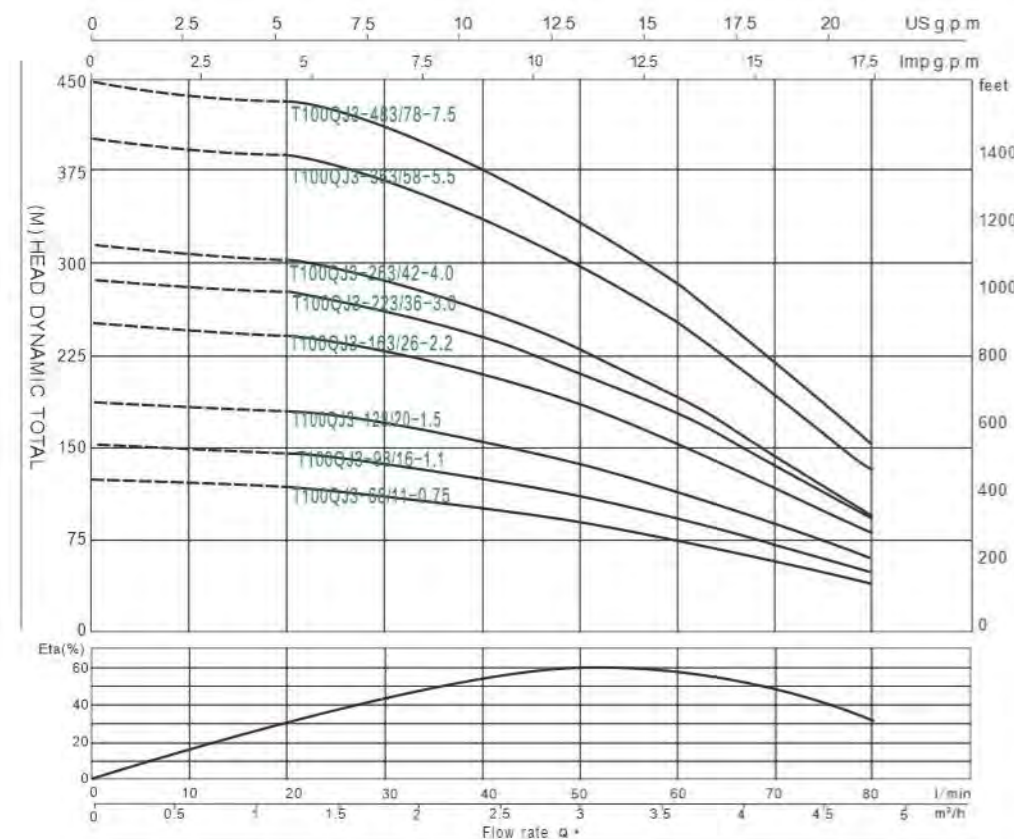


T100/ST100 QJ(D)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery		n=2850r/min		
220V~240V	380V~415V	KW	HP	M ³ /H	0	1	2	3	4	5
T100QJD3-68/11-0.75	T100QJ3-68/11-0.75	0.75	1	扬程(m) Range of lift	83	80	78	68	58	37
T100QJD3-93/16-1.1	T100QJ3-93/16-1.1	1.1	1.5		120	117	114	93	85	54
T100QJD3-128/20-1.5	T100QJ3-128/20-1.5	1.5	2		150	146	142	128	106	68
T100QJD3-163/26-2.2	T100QJ3-163/26-2.2	2.2	3		195	190	185	163	138	88
T100QJD3-223/36-3.0	T100QJ3-223/36-3.0	3	4		270	263	256	223	191	122
	T100QJ3-263/42-4.0	4	5.5		315	307	298	263	223	143
	T100QJ3-363/58-5.5	5.5	7.5		435	423	412	363	307	197
	T100QJ3-483/78-7.5	7.5	10		585	569	554	483	413	265

T100/ST100 QJ(D)6

不锈钢井用潜水泵系列
stainless steel well submersible pump series

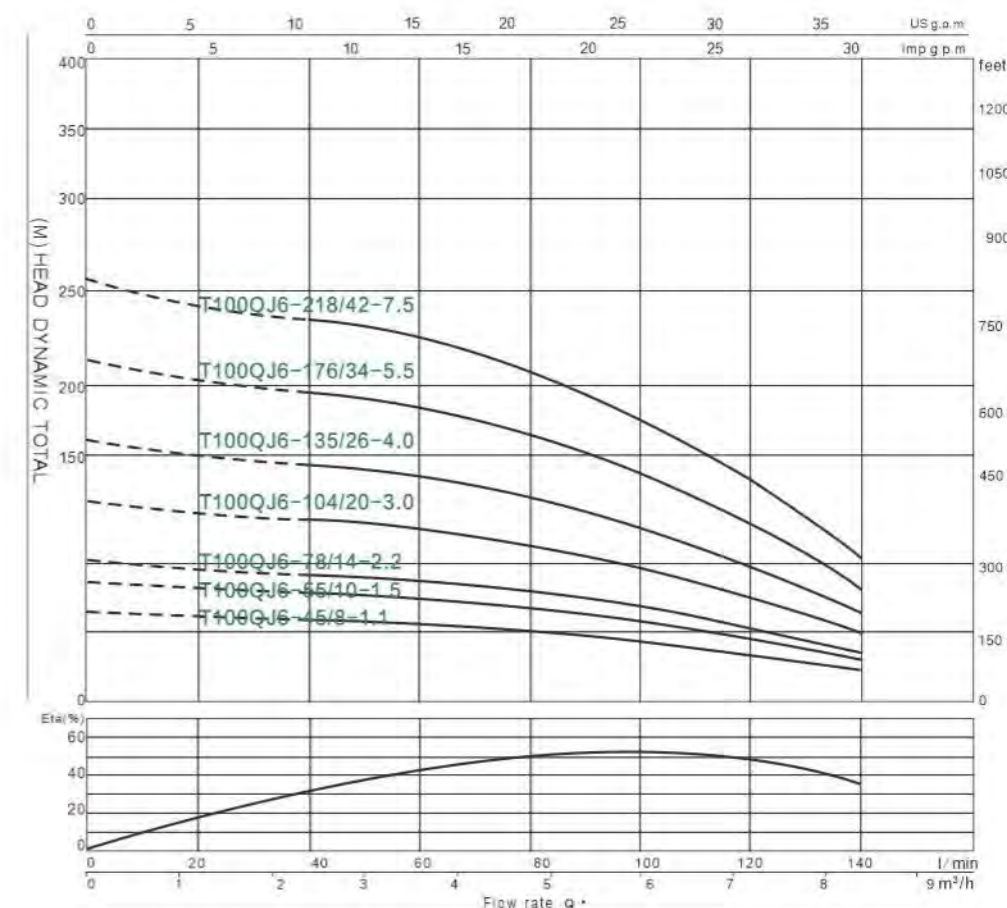


T100/ST100 QJ(D)6 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery		n=2850r/min			
220V~240V	380V~415V	KW	HP	M ³ /H	0	3	4	5	6	7	8
T100QJD6-45/8-1.1	T100QJ6-45/8-1.1	1.1	1.5	扬程(m) Range of lift	63	56	52	48	45	36	24
T100QJD6-55/10-1.5	T100QJ6-55/10-1.5	1.5	2		79	70	65	60	55	45	30
T100QJD6-78/14-2.2	T100QJ6-78/14-2.2	2.2	3		111	98	91	84	78	63	42
T100QJD6-104/20-3.0	T100QJ6-104/20-3.0	3	4		146	140	130	120	104	90	60
	T100QJ6-135/26-4.0	4	5.5		193	104	169	156	135	117	78
	T100QJ6-176/34-5.5	5.5	7.5		253	238	221	204	176	153	102
	T100QJ6-218/42-7.5	7.5	10		313	294	273	252	218	189	126

T100/ST100 QJ(D)8

不锈钢井用潜水泵系列
stainless steel well submersible pump series

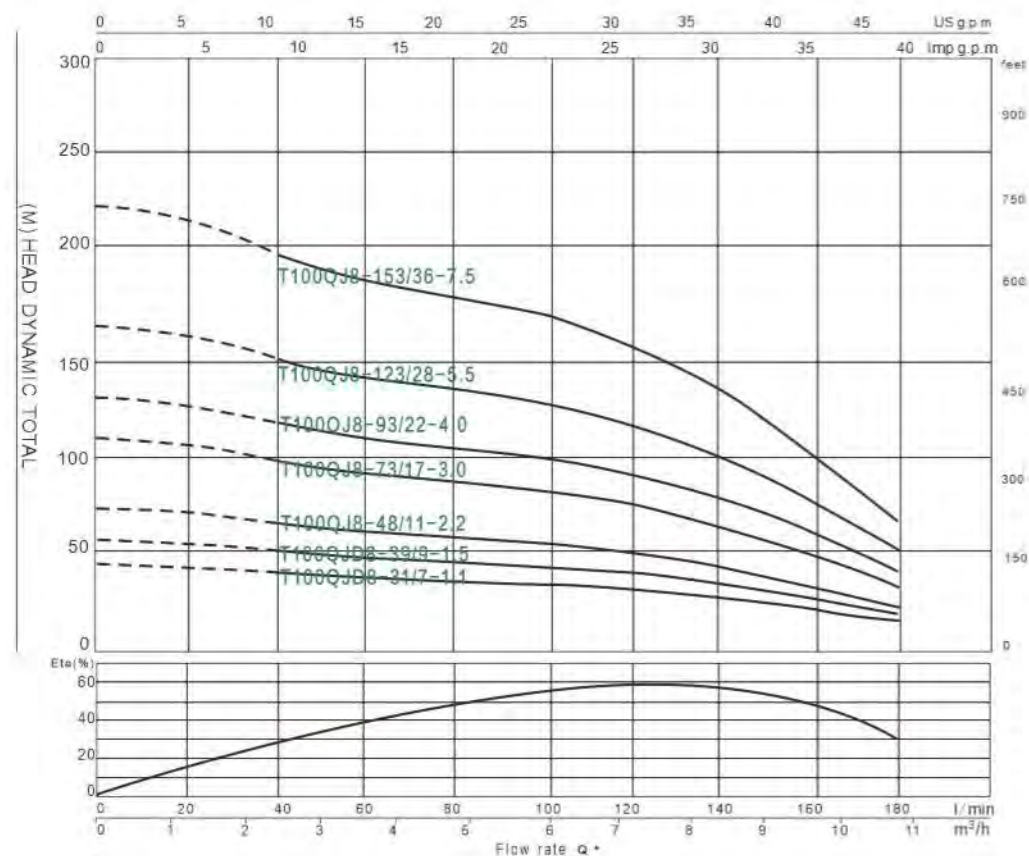


T100/ST100 QJ(D)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery						n=2850r/min	
220V~240V		380V~415V		M³/h		0	6	7	8	9	10	12	
T100QJD8-31/7-1.1	T100QJ8-31/7-1.1	1.1	1.5	扬程(m) Range of lift		48	36	34	31	29	26	18	
T100QJD8-39/9-1.5	T100QJ8-39/9-1.5	1.5	2			58	45	43	39	36	31	23	
T100QJD8-48/11-2.2	T100QJ8-48/11-2.2	2.2	3			73	56	53	48	43	38	28	
T100QJD8-73/17-3.0	T100QJ8-73/17-3.0	3	4			108	85	78	73	65	58	39	
	T100QJ8-93/22-4.0	4	5.5			138	108	100	93	83	73	50	
	T100QJ8-123/28-5.5	5.5	7.5			173	143	133	123	111	98	68	
	T100QJ8-153/36-7.5	7.5	10			223	178	165	153	138	123	83	

T100/ST100 QJ(D)10

不锈钢井用潜水泵系列
stainless steel well submersible pump series

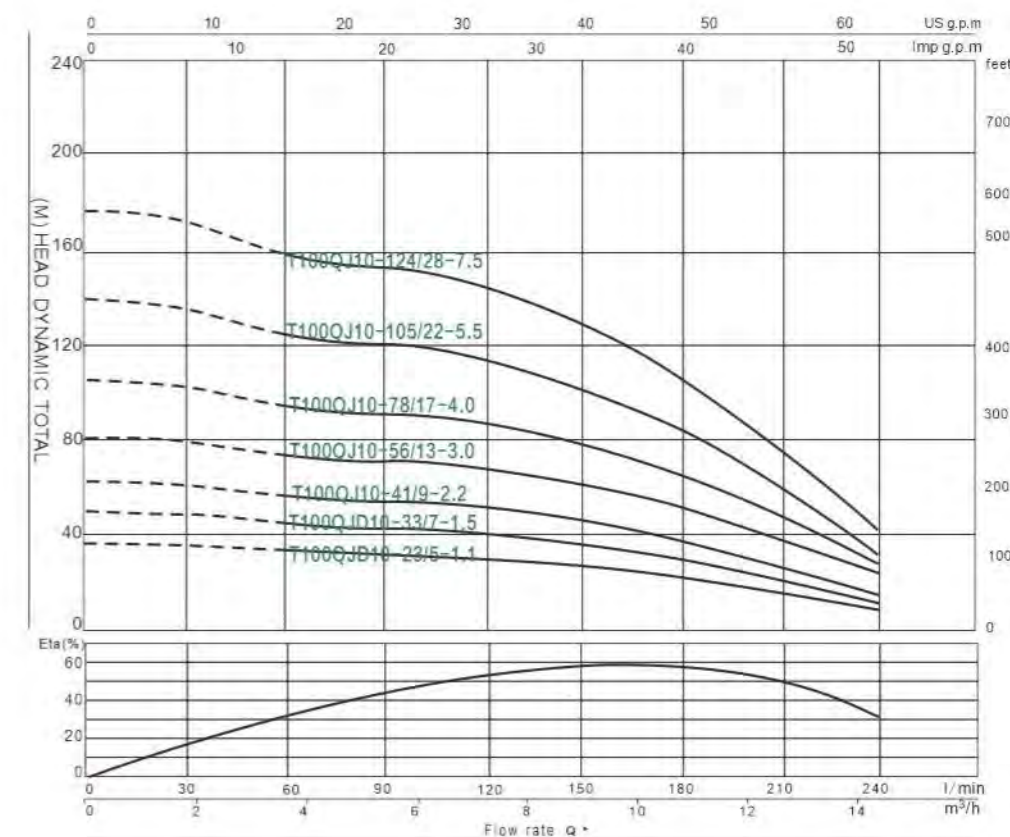


T100/ST100 QJ(D)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery						n=2850r/min	
220V~240V		380V~415V		m³/h		0	4	6	8	10	12	14	
T100QJD10-23/5-1.1	T100QJ10-23/5-1.1	1.1	1.5	扬程(m) Range of lift		30	29	27	25	23	13	8	
T100QJD10-33/7-1.5	T100QJ10-33/7-1.5	1.5	2			42	41	37	35	33	18	11	
T100QJD10-41/9-2.2	T100QJ10-41/9-2.2	2.2	3			48	46	42	42	41	21	12	
T100QJD10-56/13-3.0	T100QJ10-56/13-3.0	3	4			72	70	64	60	56	31	18	
	T100QJ10-78/17-4.0	4	5.5			108	104	95	90	78	47	27	
	T100QJ10-105/22-5.5	5.5	7.5			132	132	117	108	105	57	33	
	T100QJ10-124/28-7.5	7.5	10			168	165	148	132	124	73	42	

T100/ST100 QJ(D)16

不锈钢井用潜水泵系列
stainless steel well submersible pump series

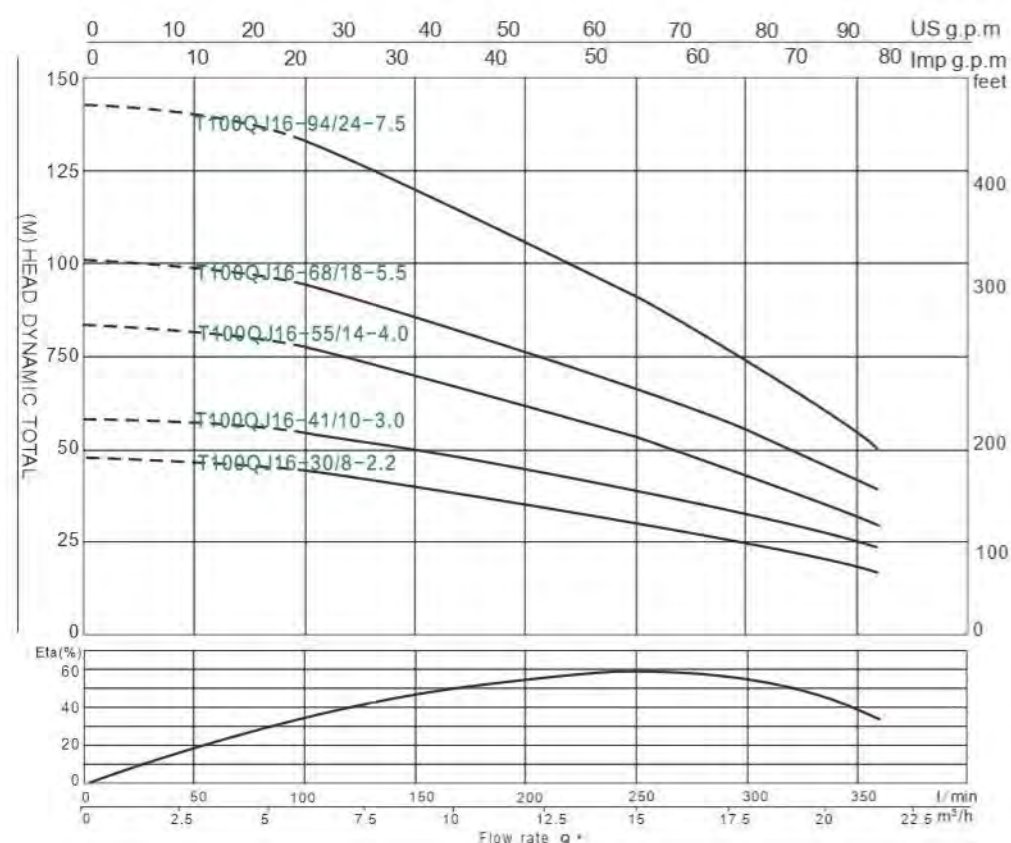

T100/ST100 QJ(D)16 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery						n=2850r/min
220V~240V	380V~415V	KW	HP	M ³ /h	0	9	12	16	18	21	
T100QJD16-30/8-2.2	T100QJ16-30/8-2.2	2.2	3	扬程(m) Range of lift	48	40	35	30	24	16	
T100QJD16-41/10-3.0	T100QJ16-41/10-3.0	3	4		60	50	44	41	30	20	
	T100QJ16-55/14-4.0	4	5.5		84	70	61	55	42	28	
	T100QJ16-68/18-5.5	5.5	7.5		108	90	78	68	54	36	
	T100QJ16-94/24-7.5	7.5	10		144	120	104	94	72	48	

Q130QJ

不锈钢井用潜水泵系列
stainless steel well submersible pump series



Q130QJ系列特点

1. 流量大, 全扬程, 全电压, 适合农用, 工业用;
2. 油浸式电机, 可潜水深度120米;
3. 水泵使用环境: 常温清水;
4. 工程塑料叶轮, 悬浮设计;
5. 陶瓷抗沙结构耐磨损。

Q130QJ Series features

1. Large flow rate, full lift range, full voltage, suitable for household and commercial use;
2. Submersible motor that can dive to the depth of 120meters; easily replaced plug-in cable;
3. Pump use environment: room temperature, clear water;
4. Engineering plastic impeller of suspension design;
5. Ceramic anti-sand structure feature features wear resistance and long life;


Q130QJ系列型号示例

Series Products Model Example



Q130QJ-8T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

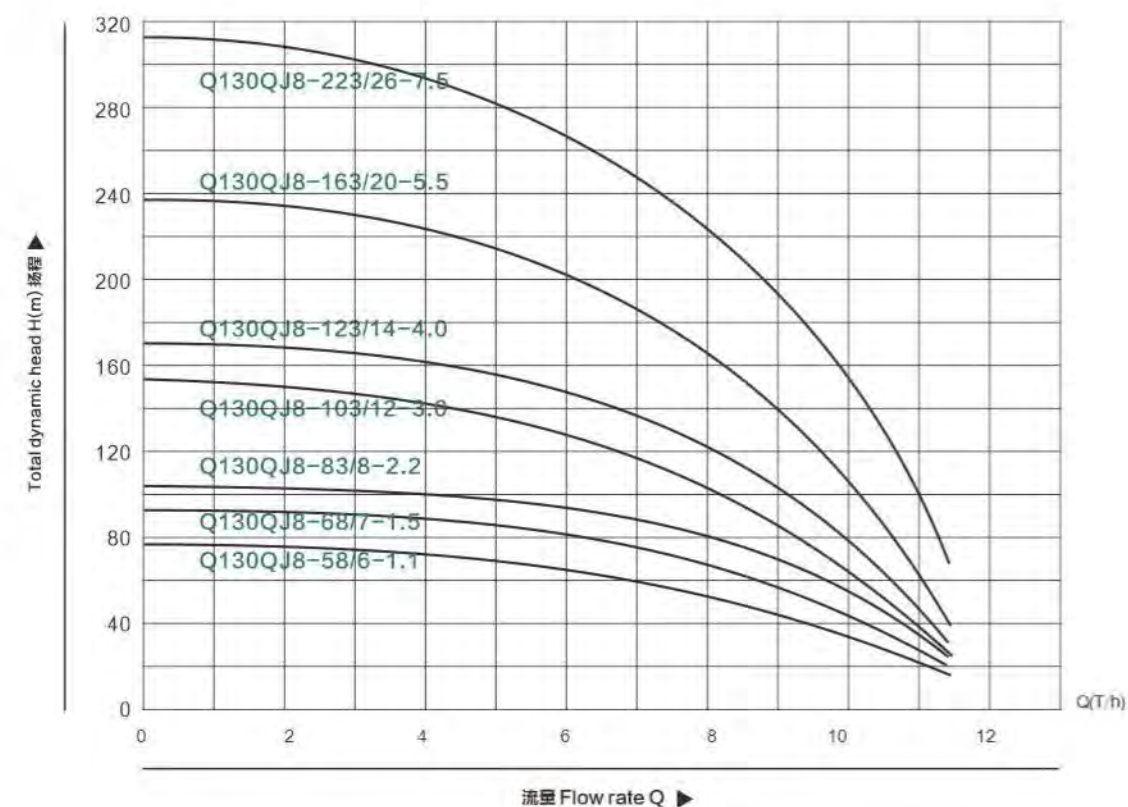


Q130QJ-8T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	5	6	7	8	9	10
Q130QJ8-58/6-1.1	220/380	1.1	1.5"	127	扬程(m) Range of lift	78	67	67	61	58	45	35
Q130QJ8-68/7-1.5	220/380	1.5	1.5"	127		93	85	82	75	68	58	43
Q130QJ8-83/8-2.2	220/380	2.2	1.5"	127		103	98	95	88	83	68	53
Q130QJ8-103/12-3.0	220/380	3	1.5"	127		153	133	127	114	103	88	63
Q130QJ8-123/14-4.0	380	4	1.5"	127		168	158	148	138	123	103	78
Q130QJ8-163/20-5.5	380	5.5	1.5"	127		239	213	198	174	163	138	103
Q130QJ8-223/26-7.5	380	7.5	1.5"	127		313	283	263	248	223	193	153
Q130QJ8-257/30-9.2	380	9.2	1.5"	127		361	326	303	286	257	222	176

Q130QJ-12T

不锈钢井用潜水泵系列
stainless steel well submersible pump series

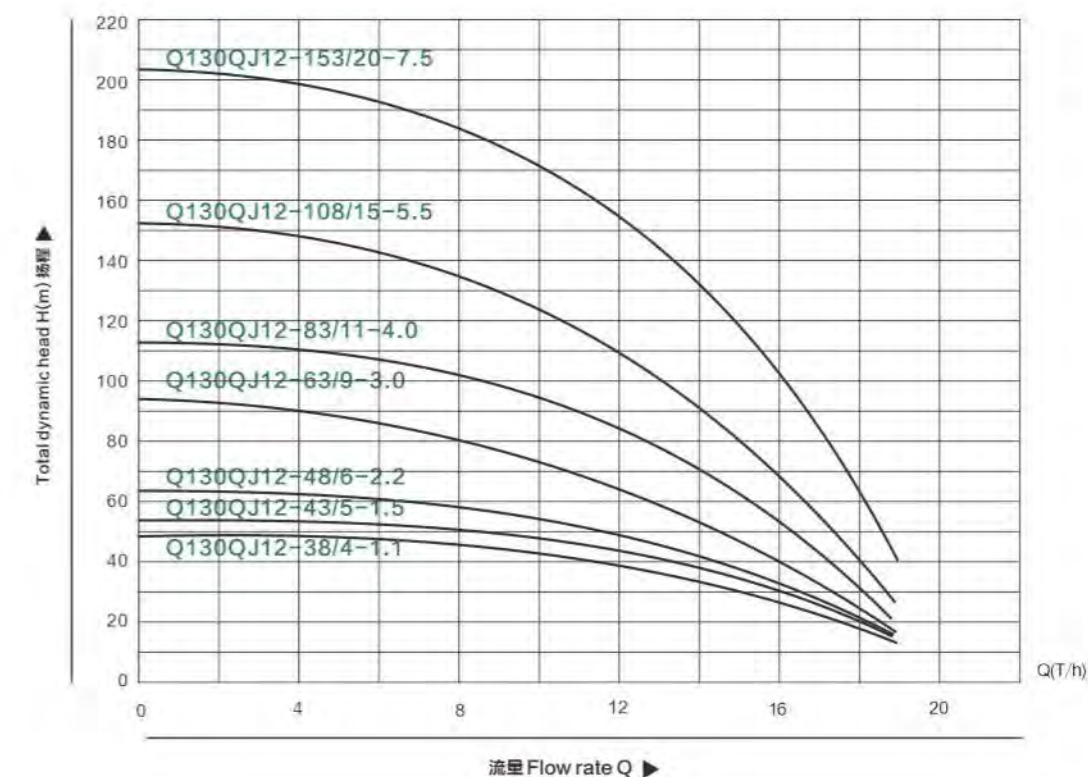

Q130QJ-12T性能参数表 PERFORMANCE TABLE

型号 Model	电压(V) Voltage	功率(kw) Power	出水口径 Outlet diameter	外径(mm) External diameter	流量(T/h) Flow rate	0	6	8	10	12	14	16
Q130QJ12-38/4-1.1	220/380	1.1	1.5"	127	扬程(m) Range of lift	46	45	44	40	38	31	23
Q130QJ12-43/5-1.5	220/380	1.5	1.5"	127		53	50	49	45	43	38	28
Q130QJ12-48/6-2.2	220/380	2.2	1.5"	127		63	59	56	53	48	41	31
Q130QJ12-63/9-3.0	220/380	3	1.5"	127		93	85	78	70	63	51	38
Q130QJ12-83/11-4.0	380	4	1.5"	127		113	106	101	93	83	68	51
Q130QJ12-108/15-5.5	380	5.5	1.5"	127		153	141	133	121	108	88	65
Q130QJ12-153/20-7.5	380	7.5	1.5"	127		203	191	183	171	153	131	101
Q130QJ12-191/24-9.2	380	9.2	1.5"	127		248	235	225	210	191	150	141



不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs

For domestic use, for civil and industrial

applications For garden use and irrigation

Operating Conditions

Maximum uid temperature up to +50°C

C Maximum sand content: 0.25%

Maximum immersion: 80m

Minimum well diameter: 4"

Motor and Pump

100% copper wire motor

Single-phase: 220 – 240V/50Hz

Three-phase: 380 – 415V/50Hz

Equip with start control box or digital auto-control box

Options on Request

Special mechanical seal

Other voltages or frequency 60Hz

Single phase motor with built-in capacitor

Series Products Model Example

4 SP (M) 2 / 6

— impeller's number

— capacity (m³/h)

— single phase

(three phase with no M marked)


- series number
- well $\varnothing 4''$

125000

4SP2

不锈钢井用潜水泵系列

estimated structural transformation source period

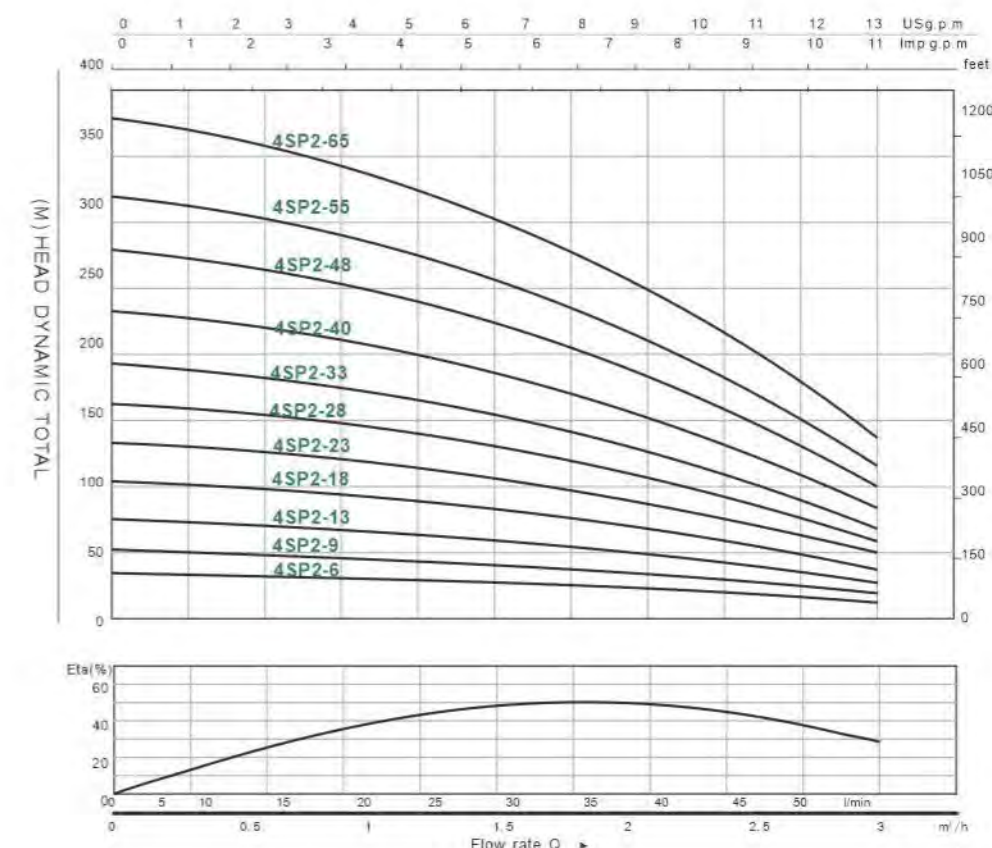


4SP(M)2 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery										n=2850r/min				
1~	3~	KW	HP	Q M ³ /H l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3				
220~240V	380~415V				0	5	10	15	20	25	30	35	40	45	50				
4SPM2-6	4SP2-6	0.37	0.5	扬程(m) Range of lift	35	34	33	32	30	28	26	23	20	17	13				
4SPM2-9	4SP2-9	0.37	0.5		52	51	50	48	45	42	38	34	30	25	19				
4SPM2-13	4SP2-13	0.55	0.75		76	74	72	69	65	61	55	50	43	36	27				
4SPM2-18	4SP2-18	0.75	1		105	103	100	95	90	84	77	69	60	50	38				
4SPM2-23	4SP2-23	1.1	1.5		134	131	127	122	115	107	98	88	77	64	48				
4SPM2-28	4SP2-28	1.5	2		163	160	155	148	140	131	119	107	93	78	59				
4SPM2-33	4SP2-33	1.5	2		192	188	183	175	166	154	141	126	110	91	70				
4SPM2-40	4SP2-40	2.2	3		233	228	222	212	201	186	170	153	134	111	84				
4SPM2-48	4SP2-48	2.2	3		280	274	266	254	241	224	205	183	160	133	101				
-	4SP2-55	3	4		321	314	305	291	276	256	234	210	184	152	116				
-	4SP2-65	3	4		379	371	360	344	326	303	277	248	217	180	137				

4SP3

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

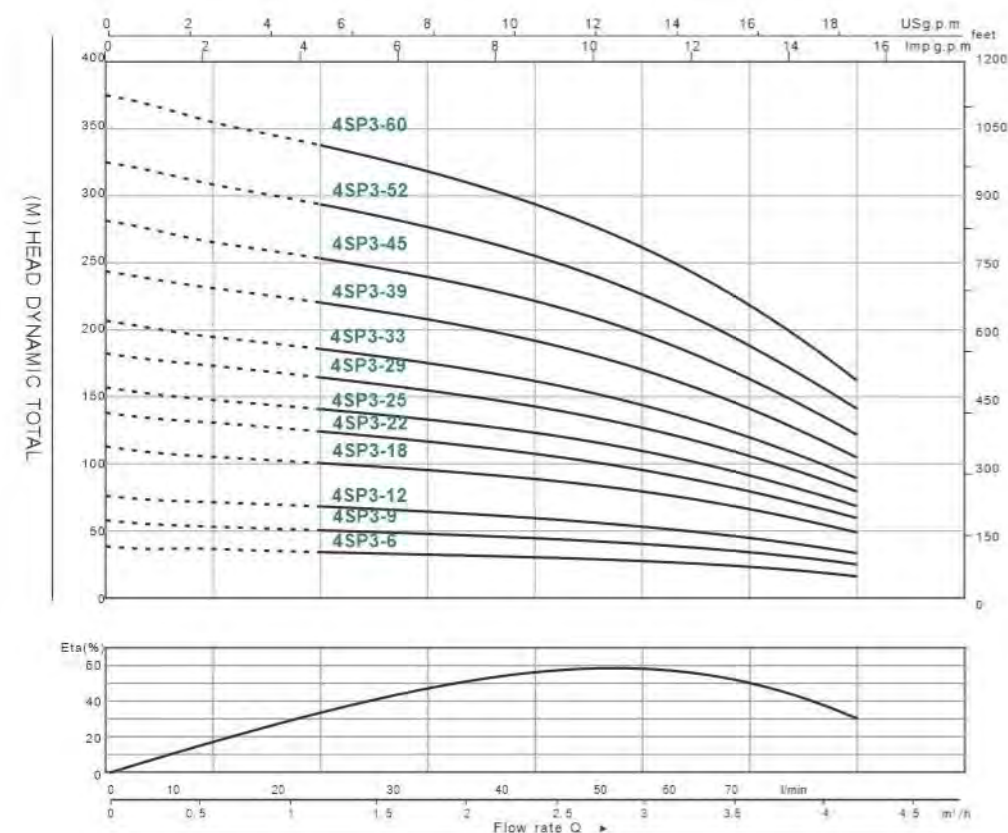


4SP(M)3 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery							
					n=2850r/min							
1~	3~	KW	HP	Q								
220-240V	380-415V			M³/H l/min	0	0.6	1.2	1.8	2.4	3	3.6	4.2
4SPM3-6	4SP3-6	0.37	0.5	扬程(m) Range of lift	37	35	34	32	29	26	22	16
4SPM3-9	4SP3-9	0.55	0.75		56	53	50	48	44	39	32	24
4SPM3-12	4SP3-12	0.75	1		75	71	67	63	59	52	43	32
4SPM3-18	4SP3-18	1.1	1.5		112	106	101	95	88	78	65	48
4SPM3-22	4SP3-22	1.5	2		137	130	123	116	108	95	79	59
4SPM3-25	4SP3-25	1.5	2		155	148	140	132	123	108	90	67
4SPM3-29	4SP3-29	2.2	3		180	171	162	153	142	126	104	77
4SPM3-33	4SP3-33	2.2	3		205	195	185	174	162	143	119	88
-	4SP3-39	3	4		242	230	218	206	191	169	140	104
-	4SP3-45	3	4		280	266	252	238	221	195	162	120
-	4SP3-52	4	5.5		323	307	291	275	255	225	187	139
-	4SP3-60	4	5.5		373	354	336	317	294	260	216	160

4SP5

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

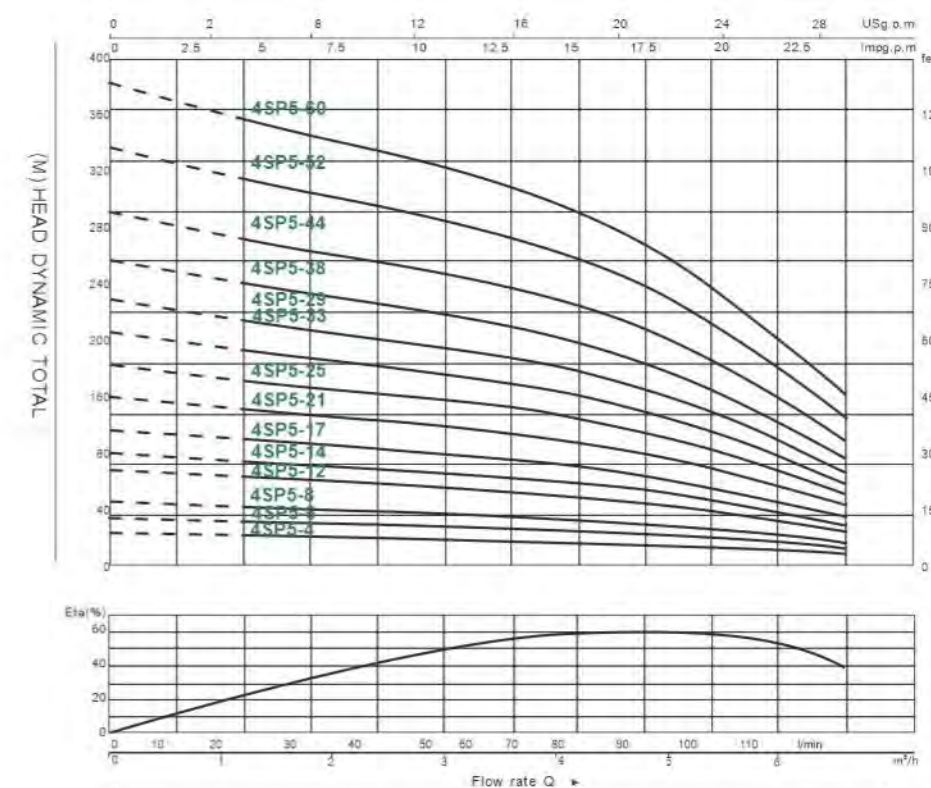


4SP(M)5 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									
					n=2850r/min									
1~	3~	KW	HP	Q										
220-240V	380-415V			M³/H l/min	0	0.6	1.2	1.8	2.4	3	3.6	4.2	5.4	6.6
4SPM5-4	4SP5-4	0.37	0.5	扬程(m) Range of lift	25	25	24	23	22	21	20	19	15	12
4SPM5-6	4SP5-6	0.55	0.75		38	37	35	34	33	31	30	28	22	18
4SPM5-8	4SP5-8	0.75	1		51	49	47	45	44	42	40	37	29	24
4SPM5-12	4SP5-12	1.1	1.5		76	74	71	68	66	63	60	56	44	36
4SPM5-14	4SP5-14	1.5	2		89	86	82	79	77	73	70	65	51	42
4SPM5-17	4SP5-17	1.5	2		108	104	100	96	93	89	85	79	62	51
4SPM5-21	4SP5-21	2.2	3		134	129	124	119	115	110	105	98	77	63
4SPM5-25	4SP5-25	2.2	3		159	153	147	142	137	131	125	117	92	75
-	4SP5-29	3	4		185	178	171	164	159	152	145	135	106	87
-	4SP5-33	3	4		210	202	194	187	180	173	165	154	121	99
-	4SP5-38	4	5.5		242	233	224	215	208	200	190	177	139	114
-	4SP5-44	4	5.5		280	270	259	249	241	231	220	205	161	132
-	4SP5-52	5.5	7.5		331	319	306	295	284	273	260	243	191	156
-	4SP5-60	5.5	7.5		382	368	353	340	328	315	300	280	220	180

4SP8

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

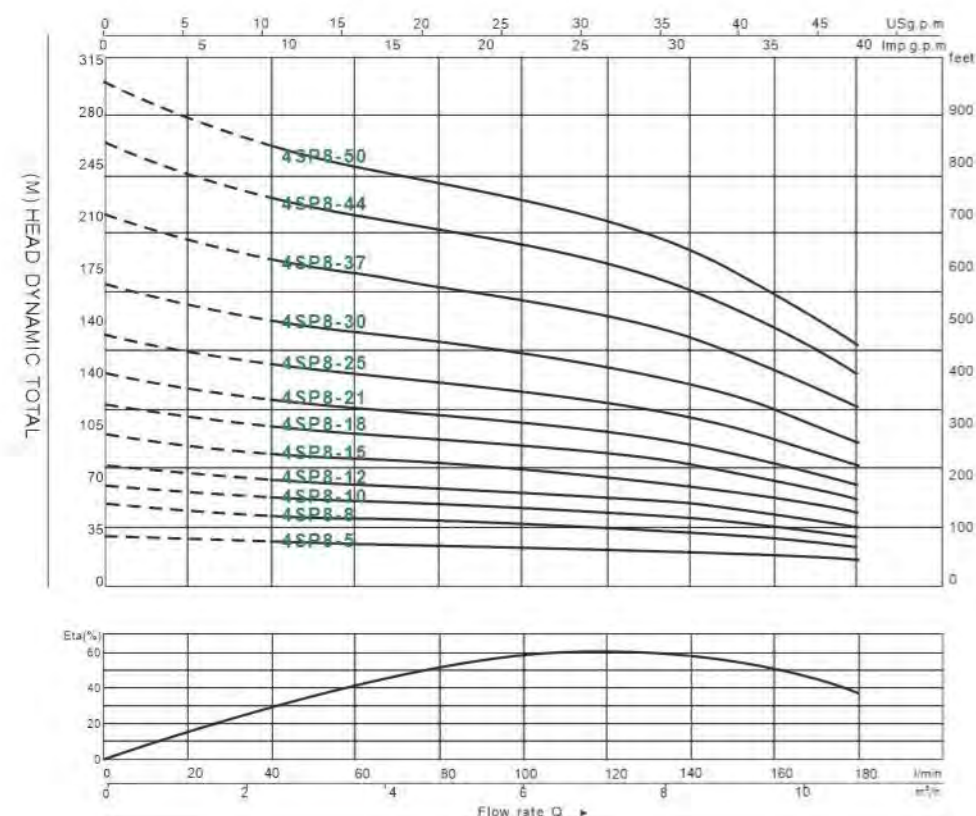


4SP(M)8 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									
					n=2850r/min									
1~	3~	KW	HP	Q M³/H l/min										
220~240V	380~415V													
4SPM8-5	4SP8-5	0.75	1	扬程(m) Range of lift	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8
4SPM8-7	4SP8-7	1.1	1.5		0	20	40	60	80	100	120	140	160	180
4SPM8-8	4SP8-8	1.5	2		30	28	26	25	24	23	22	20	17	14
4SPM8-10	4SP8-10	1.5	2		42	39	37	35	34	32	31	28	24	20
4SPM8-12	4SP8-12	2.2	3		48	45	42	40	38	37	35	32	28	23
4SPM8-15	4SP8-15	2.2	3		60	56	53	50	48	46	44	40	35	29
-	4SP8-18	3	4		72	67	63	60	58	55	53	48	42	34
-	4SP8-21	4	5.5		90	84	79	75	72	69	66	60	52	43
-	4SP8-25	4	5.5		108	100	95	90	86	83	79	72	63	51
-	4SP8-30	5.5	7.5		126	117	110	105	101	97	92	84	73	60
-	4SP8-37	5.5	7.5		150	140	132	126	120	115	109	100	87	71
-	4SP8-44	7.5	10		180	167	158	151	144	138	131	120	104	86
-	4SP8-50	7.5	10		222	206	195	186	178	170	162	148	129	106
-					264	246	231	221	211	202	193	176	153	126
-					300	279	263	251	240	230	219	200	174	143

4SP14

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

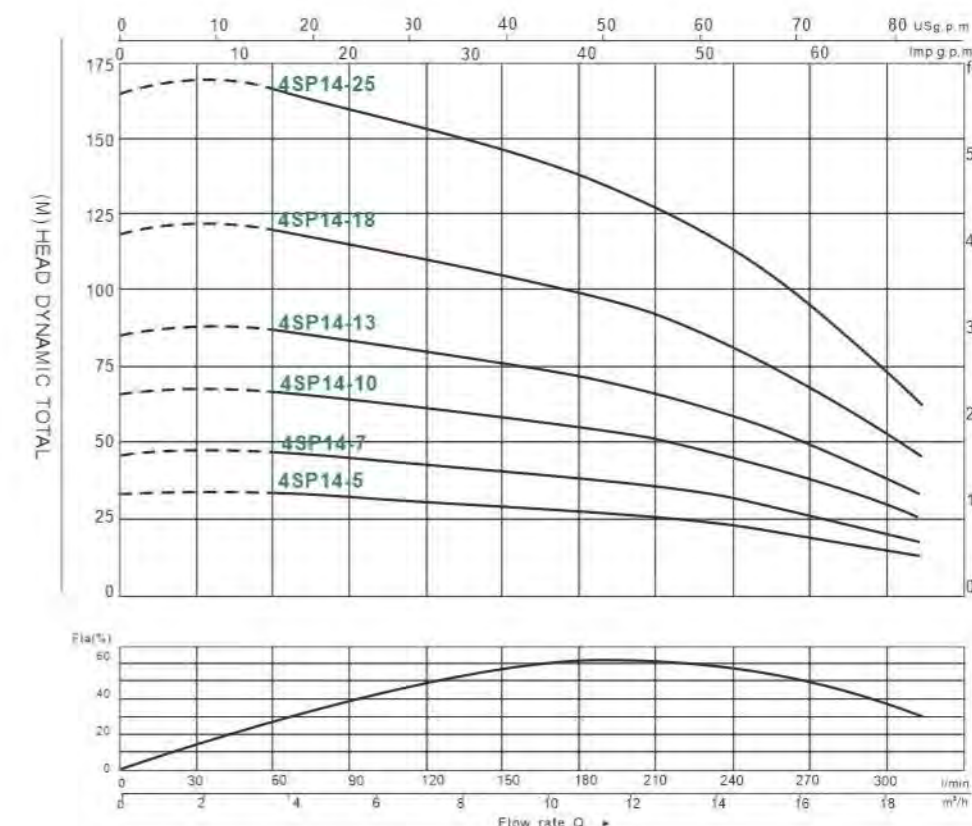

4SP(M)14 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									
					n=2850r/min									
1~	3~	KW	HP	Q M³/H l/min										
220~240V	380~415V													
4SPM14-5	4SP14-5	1.5	2	扬程(m) Range of lift	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2
4SPM14-7	4SP14-7	2.2	3		0	30	60	90	120	150	180	210	240	270
-	4SP14-10	3	4		34	33	33	32	31	29	28	26	23	19
-	4SP14-13	4	5.5		48	47	46	45	43	41	39	36	32	27
-	4SP14-18	5.5	7.5		68	67	66	64	62	58	55	51	45	38
-	4SP14-25	7.5	10		88	86	85	83	80	76	72	67	59	49
-					122	120	118	115	111	105	99	92	81	68
-					170	166	164	160	154	146	138	128	113	95

6SP

不锈钢井用潜水泵系列

stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum uid temperature up to +50℃
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 6"

Motor and Pump

100% copper wire motor
Rewindable motor or Hermetically-Sealed motor
Single-phase: 220-240V/50Hz
Three-phase: 380-415V/50Hz
1. Direct start (1 cable)
2. Star-delta start (2 cables)
Equip with start control box or digital auto-control box
NEMA dimension standards


Options on request

Special mechanical seal
Other voltages or frequency 60Hz

Warranty: 1 year

(according to our general sales conditions)


Series Products Model Example

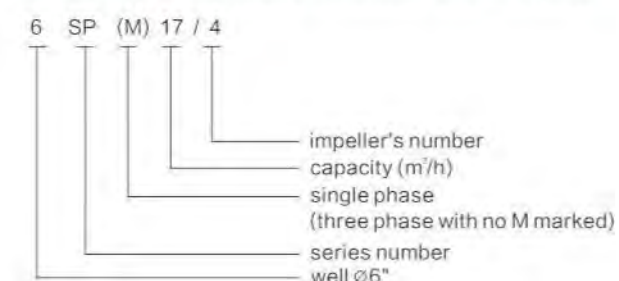

6SP17

不锈钢井用潜水泵系列

stainless steel well submersible pump series

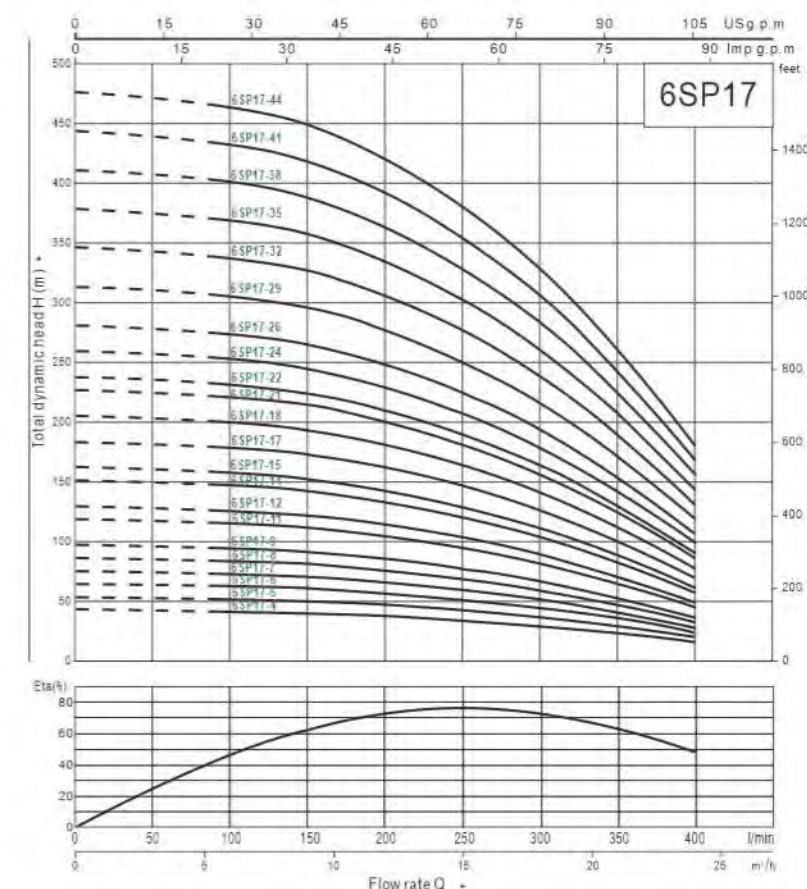


6SP(M)17 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery									
					n=2850r/min									
1~	3~	KW	HP	Q M³/H l/min	0	3	6	9	12	15	18	21	24	
220-240V	380-415V				0	50	100	150	200	250	300	350	400	
6SPM17-4	6SP17-4	2.2	3	扬程(m) Rang of lift	43	43	41	41	38	36	30	25	16	
6SPM17-5	6SP17-5	3	4		54	54	53	52	48	44	38	31	20	
6SPM17-6	6SP17-6	4	5.5		65	65	64	62	58	53	45	37	24	
6SPM17-7	6SP17-7	4	5.5		76	76	74	72	67	61	53	43	28	
6SPM17-8	6SP17-8	5.5	7.5		87	86	85	82	77	70	60	49	32	
6SPM17-9	6SP17-9	5.5	7.5		98	97	95	93	86	79	68	55	36	
	6SP17-11	7.5	10		119	119	117	113	106	97	83	67	45	
	6SP17-12	7.5	10		130	130	127	124	115	105	90	73	49	
	6SP17-14	9.2	12.5		152	151	148	144	134	123	105	85	57	
	6SP17-15	9.2	12.5		163	162	159	155	144	132	113	92	61	
	6SP17-17	11	15		184	184	180	175	163	149	128	104	69	
	6SP17-19	11	15		206	205	201	196	182	167	143	116	77	
	6SP17-21	13	17.5		228	227	223	216	202	184	158	128	85	
	6SP17-22	13	17.5		238	238	233	227	211	193	165	134	89	
	6SP17-24	15	20		260	259	254	247	230	211	180	146	97	
	6SP17-26	15	20		282	281	276	268	250	228	195	158	105	
	6SP17-29	18.5	25		314	313	307	299	278	252	218	173	117	
	6SP17-32	18.5	25		347	346	339	330	307	278	240	193	130	
	6SP17-35	22	30		379	378	371	361	336	305	263	209	142	
	6SP17-38	22	30		412	410	403	391	365	330	285	227	154	
	6SP17-41	26	35		444	443	435	422	394	357	308	246	166	
	6SP17-44	26	35		477	475	466	453	422	382	330	262	171	

6SP30

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

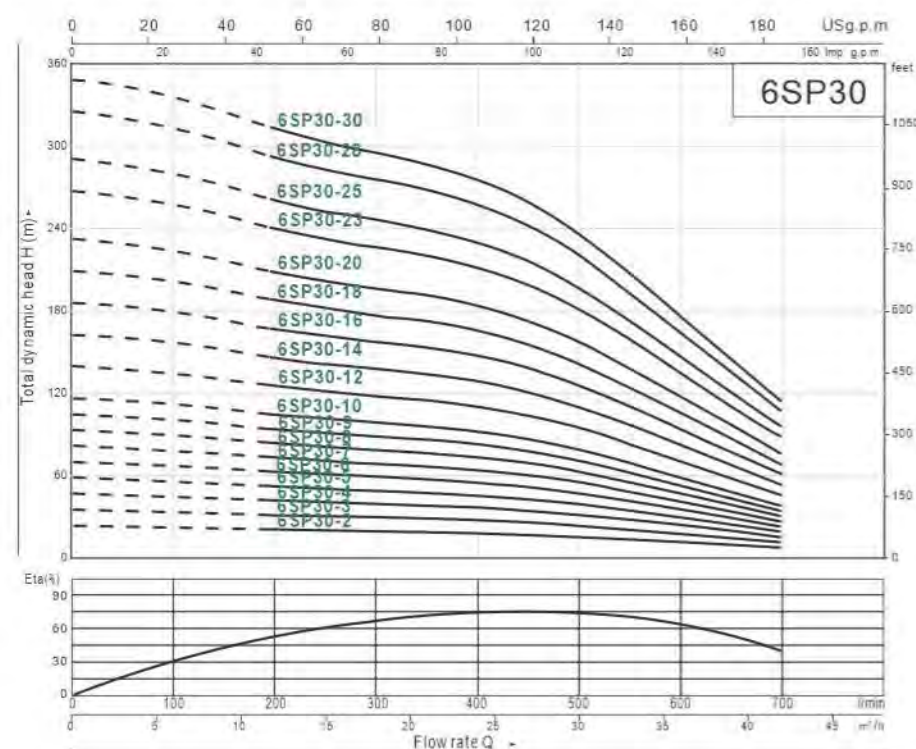


6SP(M)30 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery								n=2850r/min							
1~	3~	KW	HP	Q M³/H l/min	0	6	12	18	24	30	36	42								
220~240V	380~415V				0	100	200	300	400	500	600	700								
6SPM30-2	6SP30-2	2.2	3	扬程(m) Range of lift	23	21	21	20	19	17	12	9								
6SPM30-3	6SP30-3	3	4		35	34	32	30	28	24	18	12								
6SPM30-4	6SP30-4	4	5.5		46	45	43	40	37	32	24	16								
6SPM30-5	6SP30-5	5.5	7.5		58	56	54	51	47	40	31	20								
6SPM30-6	6SP30-6	5.5	7.5		70	67	64	61	56	48	37	24								
	6SP30-7	7.5	10		81	78	75	71	65	56	43	28								
	6SP30-8	7.5	10		93	90	86	81	74	64	49	32								
	6SP30-9	9.2	12.5		104	101	96	91	84	72	55	36								
	6SP30-10	9.2	12.5		116	112	107	101	93	80	61	40								
	6SP30-12	11	15		139	134	128	121	112	96	73	48								
	6SP30-14	13	17.5		162	157	150	141	130	112	85	56								
	6SP30-16	15	20		186	179	171	162	149	128	98	64								
	6SP30-18	18.5	25		209	202	193	182	167	144	110	72								
	6SP30-20	18.5	25		232	224	214	202	186	160	122	80								
	6SP30-23	22	30		267	258	246	232	214	184	140	92								
	6SP30-25	22	30		290	280	268	253	233	200	153	100								
	6SP30-28	26	35		325	314	300	283	260	224	171	112								
	6SP30-30	26	35		348	336	321	303	279	240	183	120								

6SP46

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

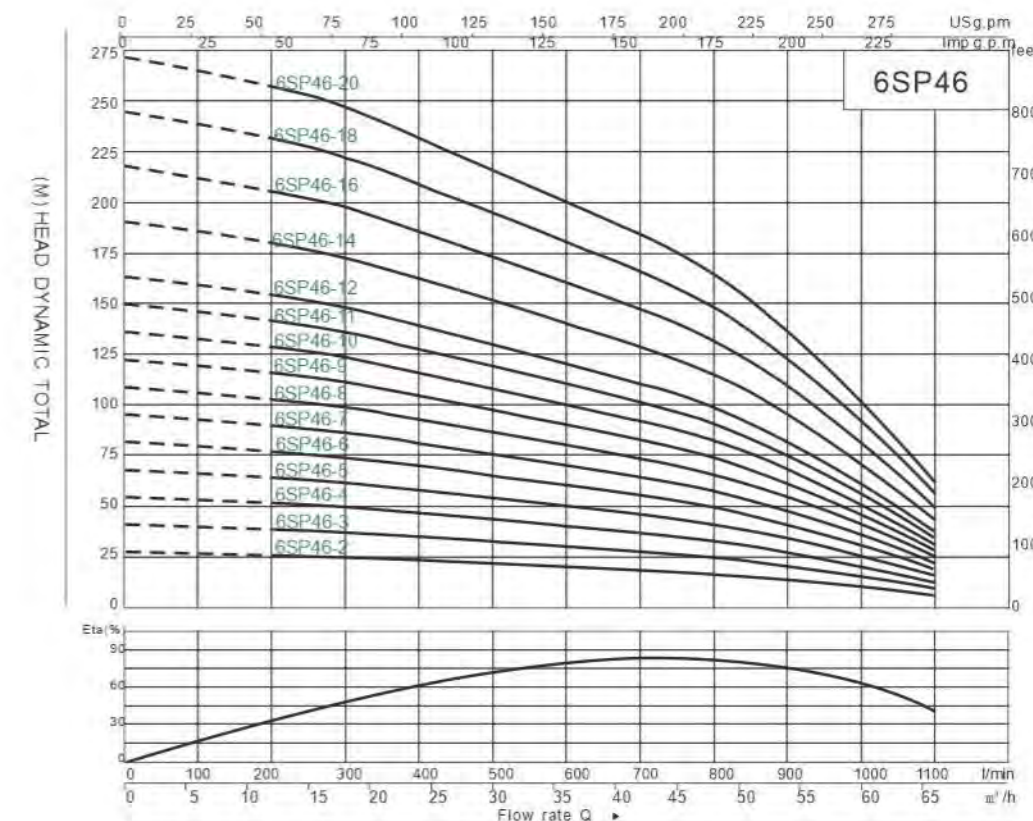


6SP(M)46 PERFORMANCE DATA 50Hz

型 号 Model		功 率 Power		流量(T/h) Flow rate	输 出 Delivery												n=2850r/min			
1~	3~	KW	HP	Q M³/H l/min	0	6	12	18	24	30	36	42	48	54	60	66				
220-240V	380-415V				0	100	200	300	400	500	600	700	800	900	1000	1100				
6SPM46-2	6SP46-2	3	4	扬程(m) Range of lift	27	26	25	25	23	22	20	19	17	14	10	7				
6SPM46-3	6SP46-3	4	5.5		41	40	39	38	34	34	31	28	25	22	15	10				
6SPM46-4	6SP46-4	5.5	7.5		54	53	52	50	46	45	41	37	33	29	20	13				
	6SP46-5	7.5	10		68	66	65	63	57	56	52	47	42	36	26	16				
	6SP46-6	9.2	12.5		81	79	78	76	68	67	62	56	50	43	31	19				
	6SP46-7	11	15		95	92	91	88	80	78	72	65	58	50	36	22				
	6SP46-8	13	17.5		108	106	104	101	91	90	82	74	66	58	41	26				
	6SP46-9	15	20		122	119	117	113	103	101	93	84	75	65	46	29				
	6SP46-10	15	20		135	132	130	126	114	112	103	93	83	72	51	32				
	6SP46-11	18.5	25		149	145	143	139	135	123	113	102	91	79	56	35				
	6SP46-12	18.5	25		162	158	156	151	137	134	124	112	100	86	61	38				
	6SP46-14	22	30		189	185	182	176	160	157	144	130	116	101	71	45				
	6SP46-16	26	35		216	211	208	202	182	179	165	149	133	115	82	51				
	6SP46-18	30	40		243	238	234	227	205	202	185	167	149	130	92	58				
	6SP46-20	30	40		270	264	260	252	228	224	206	186	166	144	102	64				

6SP60

不锈钢井用潜水泵系列
stainless steel well submersible pump series

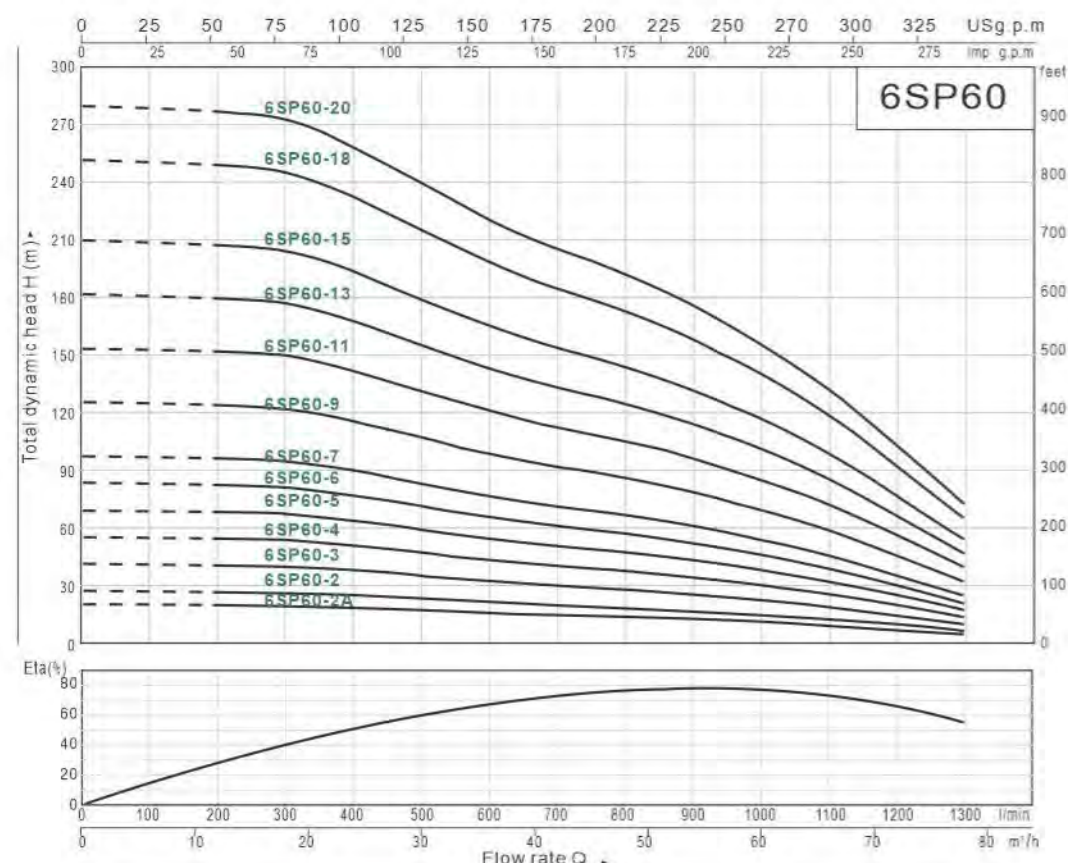

6SP(M)60 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery																n=2850r/min							
1~	3~	KW	HP	Q	M³/H l/min	0	6	12	18	24	30	36	42	48	54	60	66	72	78										
220-240V	380-415V					0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300										
6SPM60-2A	6SP60-2A	4	5.5	扬程(m) Range of lift		21	21	20	20	19	17	16	15	13	13	12	10	7	6										
	6SP60-2	5.5	7.5			28	28	28	27	26	24	22	21	19	18	16	13	10	7										
	6SP60-3	7.5	10			43	42	42	41	39	36	33	32	29	27	24	20	15	11										
	6SP60-4	9.2	12.5			57	56	56	54	52	48	44	42	38	36	32	26	20	14										
	6SP60-5	11	15			71	71	70	68	66	61	56	53	48	46	40	33	26	18										
	6SP60-6	13	17.5			85	85	84	82	79	73	67	64	58	55	48	40	31	22										
	6SP60-7	15	20			99	99	98	95	92	85	78	74	67	64	56	46	36	25										
	6SP60-9	18.5	25			128	127	126	122	118	109	100	95	86	82	72	59	46	32										
	6SP60-11	22	30			156	155	154	150	144	133	122	117	106	100	88	73	56	40										
	6SP60-13	26	35			185	183	182	177	170	157	144	138	125	116	104	86	66	47										
	6SP60-15	30	40			213	212	210	204	197	182	167	159	144	135	120	99	77	54										
	6SP60-18	37	50			256	254	252	245	236	218	200	191	173	161	144	119	92	65										
	6SP60-20	37	50			284	280	279	272	262	242	222	212	192	178	160	132	102	72										

8SP

不锈钢井用潜水泵系列
stainless steel well submersible pump series



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Operating conditions
Maximum uid temperature up to +50°C
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 8"

Motor and Pump

100% copper wire motor
Single-phase: 220V- 240V/50Hz
Three-phase: 380V- 415V/50Hz
Equip with start control box or digital auto-control box
NEMA dimension standards

Options on request

Special mechanical seal
Other voltages or frequency 60Hz

Warranty: 1 year


(according to our general sales conditions)

Series Products Model Example

8 SP 77 / 4
impeller's number
capacity (m³/h)
series number
well ø8"

8SP77

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

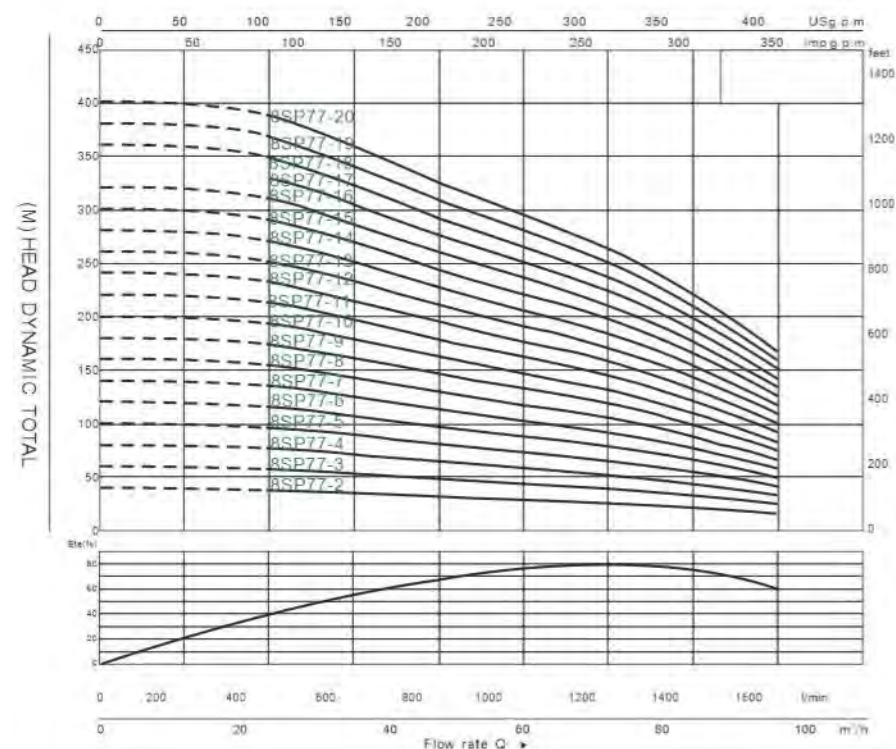


8SP77 PERFORMANCE DATA 50Hz

型号 Model	功率 Power		流量(T/h) Flow rate	输出 Delivery												n=2850r/min	
3~ 380-415V	KW	HP	Q M³/H l/min	0	12	24	36	48	60	72	84	96	108	120	132	144	156
8SP77-2	7.5	10	扬程(m) Range of lift	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600
8SP77-3	11	15		41	41	40	37	34	31	28	23	17	12	8	5	3	2
8SP77-4	15	20		61	61	59	55	50	46	41	34	26	19	13	9	6	4
8SP77-5	18.5	25		81	81	78	73	66	61	54	45	34	25	17	12	8	5
8SP77-6	22	30		102	101	98	91	83	76	68	56	43	32	22	15	10	7
8SP77-7	26	35		122	121	118	109	100	91	82	67	52	39	27	18	12	8
8SP77-8	30	40		142	141	137	127	116	106	95	78	60	45	31	21	14	9
8SP77-9	30	40		162	161	157	146	133	122	109	90	69	51	35	23	15	10
8SP77-10	37	50		182	181	176	164	149	136	122	101	77	57	39	26	17	11
8SP77-11	37	50		202	201	196	182	166	150	136	112	86	63	43	29	19	12
8SP77-12	45	60		222	221	216	200	183	164	149	123	95	69	46	31	20	13
8SP77-13	55	75		241	240	235	218	199	180	162	134	103	75	50	33	22	14
8SP77-14	55	75		263	263	255	237	213	195	176	146	112	83	55	36	24	15
8SP77-15	55	75		283	283	274	255	230	210	190	157	120	90	59	39	26	16
8SP77-16	63	85		304	303	294	273	248	225	203	168	128	96	64	42	28	17
8SP77-17	63	85		324	323	314	291	263	240	216	179	136	102	69	46	30	19
8SP77-18	63	85		344	343	333	309	280	254	229	190	145	108	73	49	32	20
8SP77-19	75	100		365	364	353	328	295	268	242	202	153	113	76	51	34	22
8SP77-20	75	100		385	384	372	346	312	283	256	213	162	120	81	54	36	23
				405	403	392	364	330	298	269	224	170	126	85	56	38	24

8SP95

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

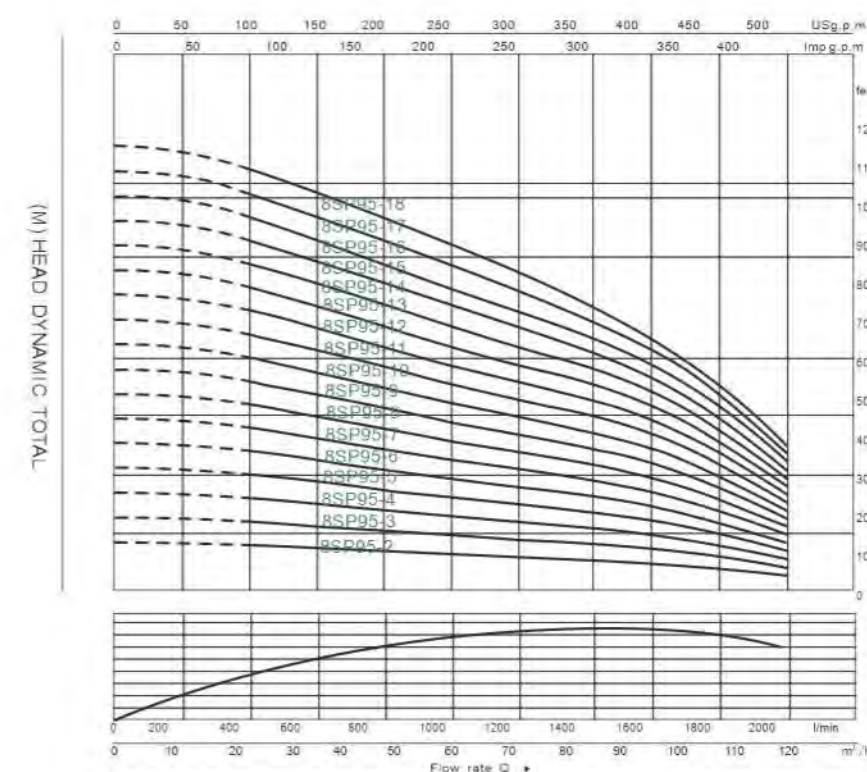

8SP95 PERFORMANCE DATA 50Hz

型号 Model	功率 Power		流量(T/h) Flow rate	输出 Delivery												n=2850r/min	
3~ 380-415V	KW	HP	Q M³/H l/min	0	12	24	36	48	60	72	84	96	108	120	132	144	156
8SP95-2	9.2	12.5	扬程(m) Range of lift	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600
8SP95-3	13	17.5		42	41	40	38	35	33	31	29	26	21	15	10	7	5
8SP95-4	18.5	25		63	62	61	58	53	48	46	42	38	31	22	15	10	7
8SP95-5	22	30		84	83	81	77	70	64	61	56	50	41	29	19	12	8
8SP95-6	26	35		106	104	101	96	88	81	76	71	62	51	36	24	16	10
8SP95-7	30	40		127	125	121	115	106	97	91	85	75	61	43	29	19	12
8SP95-8	37	50		148	146	141	134	123	113	106	99	87	71	50	34	22	14
8SP95-9	37	50		169	166	162	154	141	129	122	113	99	81	57	38	25	15
8SP95-10	45	60		190	187	182	173	158	145	137	127	111	91	64	43	28	17
8SP95-11	55	75		211	208	202	191	176	161	152	140	124	101	71	48	31	19
8SP95-12	55	75		232	229	222	210	194	177	167	154	136	111	78	52	33	20
8SP95-13	55	75		253	250	242	229	211	193	182	168	149	121	85	56	36	22
8SP95-14	63	85		274	270	263	248	229	209	196	182	162	131	92	61	40	24
8SP95-15	75	100		295	291	283	267	246	225	211	197	174	141	99	67	43	26
8SP95-16	75	100		317	312	303	285	264	242	226	211	186	150	107	73	47	28
8SP95-17	75	100		338	333	323	304	282	258	241	224	199	160	114	78	50	30
8SP95-18	92	125		359	354	343	323	299	274	257	238	212	170	121	84	52	32
				380	376	364	342	317	290	272	252	224	180	128	90	55	34

6SR

不锈钢井用潜水泵系列 stainless steel well submersible pump series

Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum uid temperature up to +35°C
Maximum sand content: 0.25%
Maximum immersion: 100m
Minimum well diameter: 6"

Motor and Pump

100% copper wire motor
Single-phase: 220V- 240V/50Hz
Three-phase: 380V- 415V/50Hz
Equip with start control box or digital auto-control box
NEMA dimension standards


Options on request

Special mechanical seal
Other voltages or frequency 60Hz
Single phase motor with built-in capacitor
Single phase motor with built-in capacitor

Warranty: 1 year


(according to our general sales conditions)

Series Products Model Example

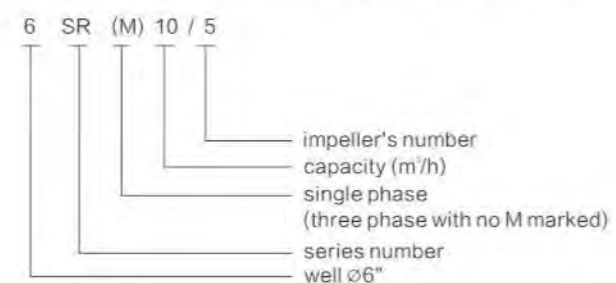

6SR10

不锈钢井用潜水泵系列
stainless steel well submersible pump series

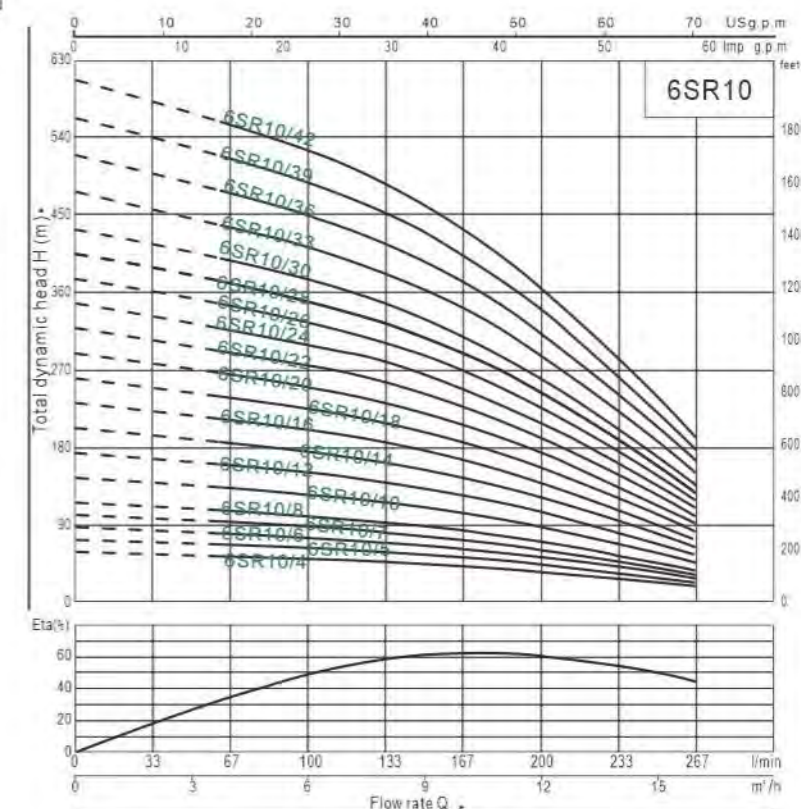


6SR(M)10 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery												
1~	3~	KW	HP	Q M³/H l/min	n=2850r/min												
220-240V	380-415V				0	2	4	6	8	10	12	14	16	18	20	22	24
6SRM10-4	6SR10-4	2.2	3	58	55	53	50	46	41	35	27	18					
6SRM10-5	6SR10-5	3	4	73	69	67	63	58	52	44	34	23					
6SRM10-6	6SR10-6	4	5.5	87	83	80	76	70	62	53	41	28					
6SRM10-7	6SR10-7	4	5.5	102	97	93	88	81	72	62	48	32					
6SRM10-8	6SR10-8	5.5	7.5	116	110	106	101	93	82	70	54	37					
6SRM10-10	6SR10-10	5.5	7.5	145	138	133	126	116	103	88	68	46					
	6SR10-12	7.5	10	174	166	160	151	139	124	106	82	55					
	6SR10-14	7.5	10	203	193	186	176	162	144	123	95	64					
	6SR10-16	9.2	12.5	232	221	213	202	186	165	141	109	74					
	6SR10-18	9.2	12.5	261	248	239	227	209	185	158	122	83					
	6SR10-20	11	15	290	276	266	252	232	206	176	136	92					
	6SR10-22	11	15	319	304	293	277	255	227	194	150	101					
	6SR10-24	13	17.5	348	331	319	302	278	247	211	163	110					
	6SR10-26	13	17.5	377	359	346	328	302	268	229	177	120					
	6SR10-28	15	20	406	386	372	353	325	288	246	190	129					
	6SR10-30	15	20	435	414	399	378	348	309	264	204	138					
	6SR10-33	18.5	25	479	455	439	416	383	340	290	224	152					
	6SR10-36	18.5	25	522	497	479	454	418	371	316	243	166					
	6SR10-39	22	30	566	538	519	491	452	402	341	263	179					
	6SR10-42	22	30	609	580	559	529	487	433	368	283	193					

6SR18

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

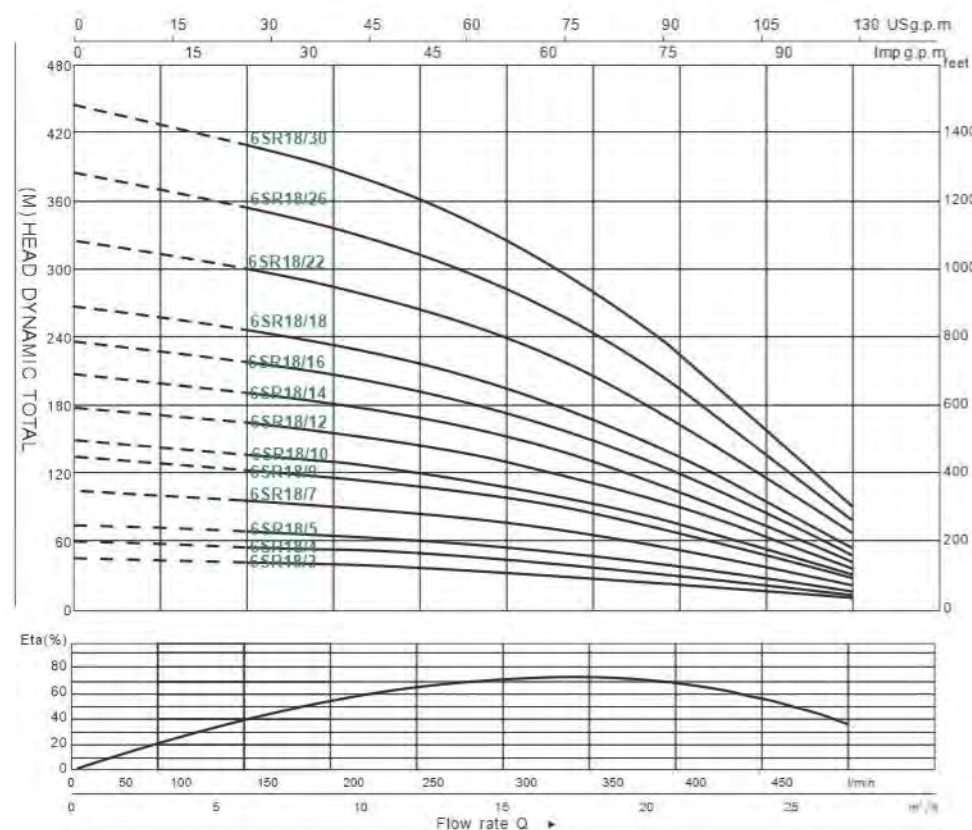


6SR(M)18 PERFORMANCE DATA 50Hz

型 号 Model		功 率 Power		流量(T/h) Flow rate	输 出 Delivery										n=2850r/min	
1~	3~	KW	HP	Q M ³ /H l/min	0	3	6	9	12	15	18	21	24	27		
220~240V	380~415V				0	50	100	150	200	250	300	350	400	450		
6SRM18-3	6SR18-3	2.2	3	扬程(m) Range of lift	45	43	40	39	36	32	28	22	16	9		
6SRM18-4	6SR18-4	3	4		60	58	54	52	48	43	38	30	22	12		
6SRM18-5	6SR18-5	4	5.5		76	72	67	66	61	54	47	37	27	16		
6SRM18-7	6SR18-7	5.5	7.5		106	101	94	92	85	75	66	52	38	22		
	6SR18-9	7.5	10		136	130	121	118	109	96	85	67	49	28		
	6SR18-10	7.5	10		151	144	134	131	121	107	94	74	54	31		
	6SR18-12	9.2	12.5		181	173	161	157	145	128	113	89	65	37		
	6SR18-14	11	15		211	202	188	183	169	150	132	104	76	43		
	6SR18-16	13	17.5		242	230	214	210	194	171	150	118	87	50		
	6SR18-18	15	20		272	259	241	236	218	193	169	133	97	56		
	6SR18-22	18.5	25		332	317	295	288	266	235	207	163	118	68		
	6SR18-26	22	30		393	372	348	341	314	278	244	192	139	81		
	6SR18-30	26	35		453	430	402	393	363	321	282	222	160	93		

6SR30

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

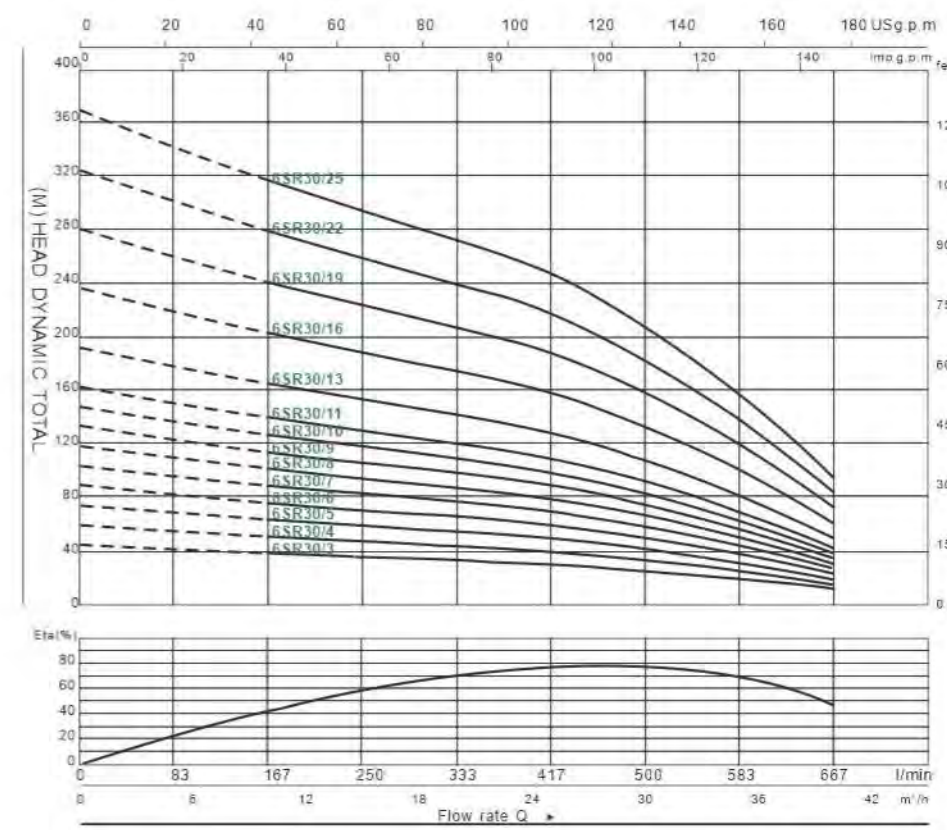


6SR(M)30 PERFORMANCE DATA 50Hz

型号 Model		功率 Power		流量(T/h) Flow rate	输出 Delivery										n=2850r/min	
1~	3~	KW	HP	Q	M³/H	0	5	10	15	20	25	30	35	40		
220-240V	380-415V				l/min	0	83	167	250	333	417	500	583	667		
6SRM30-3	6SR30-3	3	4	扬程(m) Range of lift		44	41	38	36	33	30	25	20	10		
6SRM30-4	6SR30-4	4	5.5			59	56	52	48	45	41	34	26	15		
6SRM30-5	6SR30-5	5.5	7.5			74	70	65	61	56	51	42	32	19		
	6SR30-6	7.5	10			88	83	77	73	67	61	51	38	22		
	6SR30-7	7.5	10			103	96	90	85	78	71	59	45	26		
	6SR30-8	9.2	12.5			118	110	103	97	89	81	67	51	30		
	6SR30-9	11	15			132	123	115	109	100	91	76	58	33		
	6SR30-10	11	15			147	137	128	121	111	101	84	64	37		
	6SR30-11	13	17.5			162	151	140	133	122	111	92	70	41		
	6SR30-13	15	20			191	178	165	157	144	131	109	83	48		
	6SR30-16	18.5	25			235	219	203	194	178	160	134	102	59		
	6SR30-19	22	30			279	260	241	229	211	190	160	122	70		
	6SR30-22	26	35			323	301	279	265	242	220	185	141	81		
	6SR30-25	30	40			368	343	318	301	276	251	210	160	93		

6SR45

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

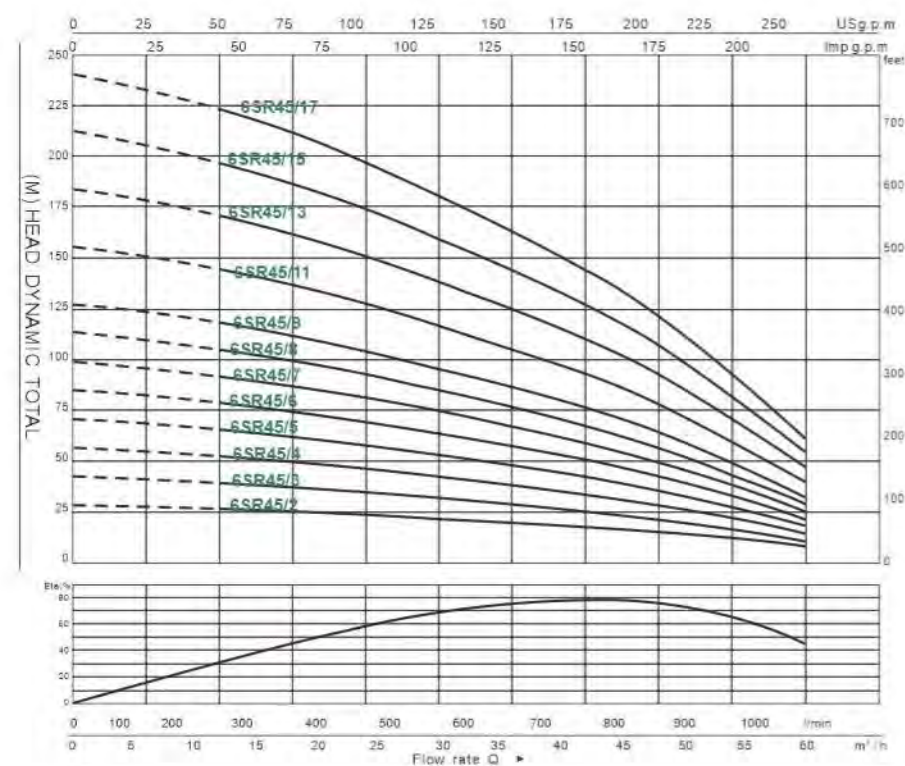


6SR(M)45 PERFORMANCE DATA 50Hz

型 号 Model		功 率 Power		流量(T/h) Flow rate	输 出 Delivery											n=2850r/min			
1~	3~	KW	HP	Q M³/H l/min	0	6	12	18	24	30	36	42	48	54	60				
220~240V	380~415V			0	100	200	300	400	500	600	700	800	900	1000					
6SRM45-2	6SR45-2	3	4	扬程(m) Range of lift	28	27	26	24	23	21	19	18	15	12	8				
6SRM45-3	6SR45-3	4	5.5		42	41	40	37	35	32	30	27	22	17	12				
6SRM45-4	6SR45-4	5.5	7.5		56	54	53	49	46	42	40	35	29	22	14				
	6SR45-5	7.5	10		71	68	67	61	58	53	50	44	36	28	19				
	6SR45-6	9.2	12.5		85	82	80	73	70	64	60	53	43	34	23				
	6SR45-7	11	15		99	95	91	85	81	74	69	61	50	39	26				
	6SR45-8	13	17.5		113	109	104	98	91	85	78	70	58	45	30				
	6SR45-9	15	20		127	122	117	110	104	95	88	78	65	50	33				
	6SR45-11	18.5	25		155	150	144	134	126	117	106	95	79	62	41				
	6SR45-13	22	30		183	177	170	159	150	138	126	113	94	73	48				
	6SR45-15	26	35		212	204	197	183	171	159	145	130	108	84	55				
	6SR45-17	30	40		240	231	223	207	195	180	164	147	122	95	62				

6SR60

不锈钢井用潜水泵系列
Stainless steel well submersible pump series

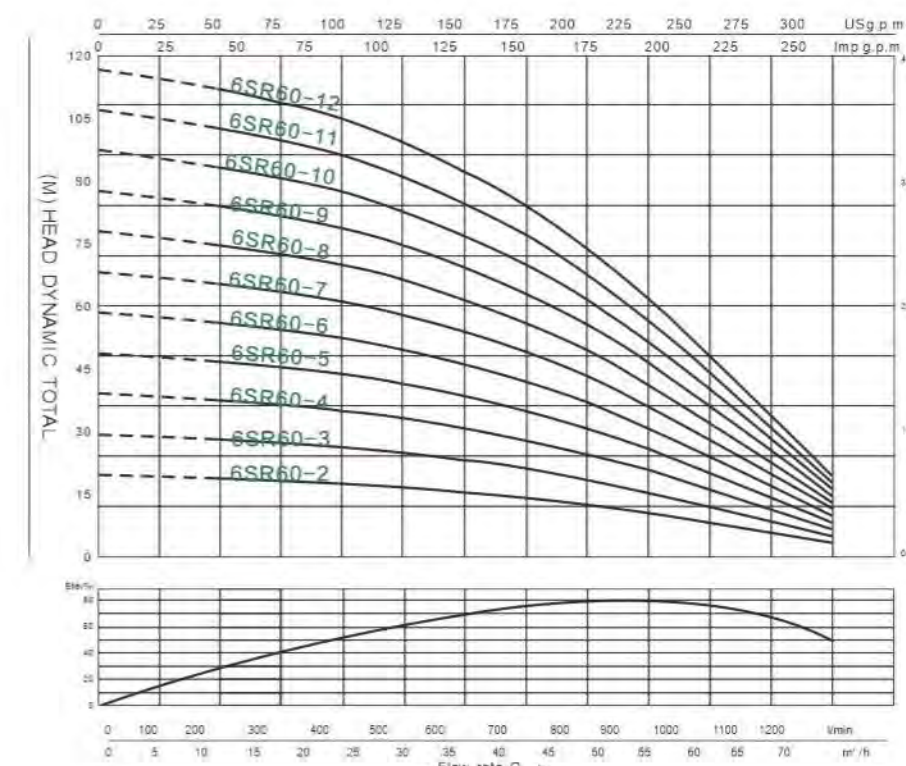

6SR(M)60 PERFORMANCE DATA 50Hz

型 号 Model		功 率 Power		流量(T/h) Flow rate	输 出 Delivery												n=2850r/min			
1~	3~	KW	HP	Q M³/h l/min	0	6	12	18	24	30	36	42	48	54	60	66	72			
220-240V	380-415V				0	100	200	300	400	500	600	700	800	900	1000	1100	1200			
6SRM60-2	6SR60-2	4	5.5	扬程(m) Range of lift	25	24	23	23	22	21	20	18	16	12	10	6	4			
6SRM60-3	6SR60-3	5.5	7.5		38	36	36	35	34	32	28	28	23	20	16	11	6			
	6SR60-4	7.5	10		50	48	47	46	45	42	39	37	30	26	21	14	8			
	6SR60-5	11	15		62	61	59	58	56	53	49	46	38	33	26	18	11			
	6SR60-6	15	20		74	73	70	70	67	64	59	55	46	40	31	22	13			
	6SR60-7	18.5	25		86	85	82	81	78	74	66	62	53	46	36	25	15			
	6SR60-8	18.5	25		99	97	94	93	88	85	77	72	61	53	42	29	17			
	6SR60-9	22	30		111	109	105	104	100	95	86	81	68	59	47	32	19			
	6SR60-10	26	35		123	121	117	114	110	104	96	90	76	66	52	36	21			
	6SR60-11	30	40		135	133	129	126	121	115	106	99	84	73	57	40	23			
	6SR60-12	30	40		147	145	141	137	132	126	115	107	91	79	62	43	25			



4SK

不锈钢井用潜水泵系列

stainless steel well submersible pump series

4SK Series features

- 1.Submerible motor that can dive to the depth of 120 meters;
- 2.Pump use environment: room temperature, clear water;
- 3.Small size, Large flow rate, full lift range, full voltage, suitable for household and commercial use;

PERFORMANCE TABLE

型号 Model		功率 Power		流量(T/h) Flow rate		输出 Delivery										n=2850r/min			
1~ 220V/240V	3~ 380V/415V	KW	HP	Q	M ³ /H l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3			
						0	5	10	15	20	25	30	35	40	45	50			
4SK(M)100	4SK100	0.75	1	扬程(m) Range of lift	64	58	52	46	39	33	26	19	13	9	5				
4SK(M)150	4SK150	1.1	1.5		107	98	88	78	68	57	46	34	24	16	9				



QGD

不锈钢螺杆泵系列

stainless steel sc pump series

- 4" Screw Pump
- Pump/Motor
- Insulation class : B
- Protection grade: IP68
- Diameter: Φ4"
- Highest temperature of liquid: 35℃

PERFORMANCE TABLE

型号 Model	功率 Power	扬程 Head max	流量 Flow max
220V/380V	KW	HP	m ³ /h
QGD1.2-50-0.37	0.37	0.5	1.8
QGD1.2-50-0.50	0.50	0.67	2.5
QGD1.2-50-0.75	0.75	1	1.8


QQ Silent Intelligent Automatic Self-Priming Pump for cold and hot water

智能增压泵

Intelligent booster pump



- 1 Super silent**
The brand-new flow channel and patented high-bass tuning technology reduce the running noise of the pump by more than 46%.
- 2 Delay Start**
When power on, pump will delay the 3S to start, in order to protect the motor and human security
- 3 Water Stop, Pump Stop**
No water use after 8 minutes, the pump will automatically power off after 1hours will restart to check whether there is flow through, until the normal water supply
- 4 Flow control**
When there is small water flow, the flow sensor will automatic change to small flow control system to prevent pump on and off frequently during the rush hour
- 5 Overload Protection**
The motor overload protection system protect the motor from get burned in case of non-normal uses

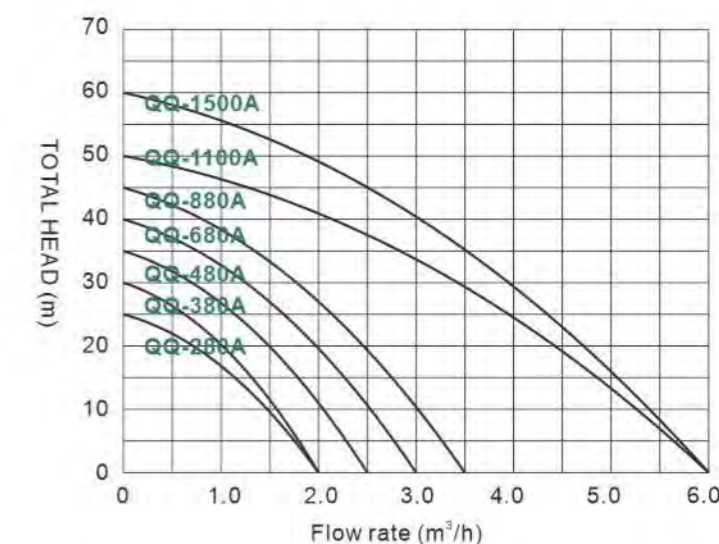

MODEL SELECTION

型号 Model	功率 Power (w)	电压 Voltage (V)	最大流量 Max flow (m³/h)	最高扬程 Max head (m)	额定流量 Rated flow (m³/h)	额定扬程 Rated head (m)	建议使用 楼层
QQ-280A	200	220V/50Hz	2.0	25	1.0	12.0	<3th floor
QQ-380A	300	220V/50Hz	2.0	30	1.0	13.5	<4th floor
QQ-480A	400	220V/50Hz	2.5	35	1.0	15.0	<4th floor
QQ-680A	600	220V/50Hz	3.0	40	1.5	22.0	<6th floor
QQ-880A	800	220V/50Hz	3.5	45	1.5	28.0	<8th floor
QQ-1100A	1100	220V/50Hz	6.0	50	2.5	35.0	<10th floor
QQ-1500A	1500	220V/50Hz	6.0	60	3	35.0	<12th floor

PARTS

配件



Control Box



Control Box



Iron Outlet



bearing



sand proof cup



clamping spring and end cover



impeller



impeller

outlet valve

lower bracket



capacitor



protector



oil sac



brass outlet and connector



SS outlet and connector



Iron Outlet



coupling



Delivery



hexagonal rods