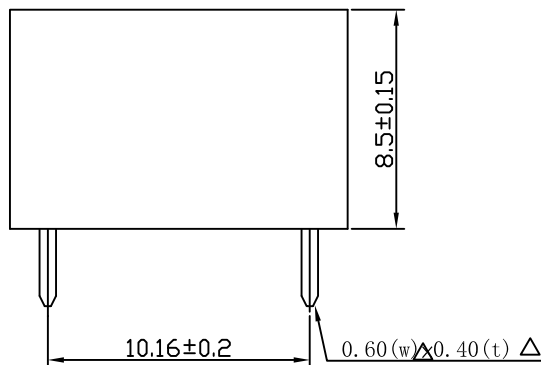
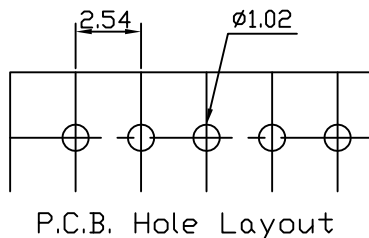
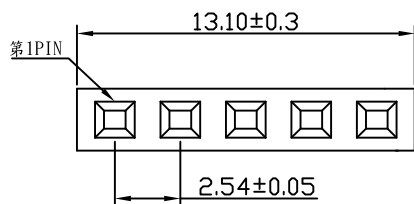


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Standard	:P. B. T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F101	X	X	X	DXXX	-XX-	NW
(Female Header Single Row) F101 (2.54 H:8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating (Standard: P) D: Gold Flash/Tin (Standard: G)	P: PBT C: LCP N: Nylon-6T N1: Nylon-9T (Standard: S-D030)	S-D D030	(04 TO 40 Contacts)	NW: 抽第 2.3.4PIN

东莞华连电子有限公司

DESCRIPTION(内容):

2.54mm Female Header H:8.5 W:2.4 180°
抽第2.3.4PIN (RoHS)

PART NO:
(料 號) F101-SG_-D030-05-NW

DWG NO(圖號):

DRAWN(製圖):

黄炳秋

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):

1:XX



REV:

A/1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3


4

DESCRIPTION

△ 此符號表示重點管控尺寸

DATE

2022.11.01

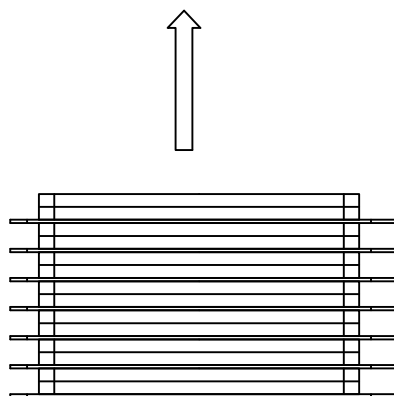

1. 外箱規格：40x28x28cm (单重：520g)
真空盘规格：240x190x17mm (单重：35g)
2. 当为零数出货时以塑胶袋包装再装至最小箱.
3. 封箱方式(看上图所示): 外箱四周使用透明的封箱胶帶封住, 并封成王字型

PIN數	真空盤規格	每袋數量		PIN數	真空盤規格	每袋數量
1*2	V001+PE	1000/PCS		1*22	V004	120/PCS
1*3	V001+PE	800/PCS		1*23	V004	120/PCS
1*4	V001+PE	500/PCS		1*24	V004	120/PCS
1*5	V001+PE	500/PCS		1*25	V004	120/PCS
1*6	V004	480/PCS		1*26	V004	80/PCS
1*7	V004	400/PCS		1*27	V004	80/PCS
1*8	V004	360/PCS		1*28	V004	80/PCS
1*9	V004	320/PCS		1*29	V004	80/PCS
1*10	V004	280/PCS		1*30	V004	80/PCS
1*11	V004	240/PCS		1*31	V004	80/PCS
1*12	V004	240/PCS		1*32	V004	80/PCS
1*13	V004	200/PCS		1*33	V004	80/PCS
1*14	V004	200/PCS		1*34	V004	80/PCS
1*15	V004	160/PCS		1*35	V004	80/PCS
1*16	V004	160/PCS		1*36	V004	80/PCS
1*17	V004	160/PCS		1*37	V004	80/PCS
1*18	V004	160/PCS		1*38	V004	80/PCS
1*19	V004	150/PCS		1*39	V004	40/PCS
1*20	V004	120/PCS		1*40	V004	40/PCS

东莞华连电子有限公司

DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
	黃炳秋	(公差)		A/1			
2.54mm Female Header H:8.5 W:2.4 180° (環保材料)	CHECKED(確認):	.X .XX .XXX	.XXXX .X ° .XX°	UNIT:	1		2022.11.18
	APPROVAL(核准):	SCALE(比例):		SIZE:	2		
				A4	3		
PART NO: (料號) F101-SG_-D030-05-NW(包裝圖)		1:XX		SHEET:	4		
DWG NO(圖號):				1/1			