

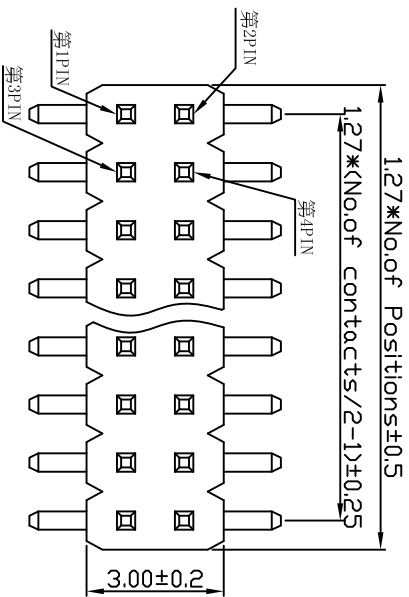


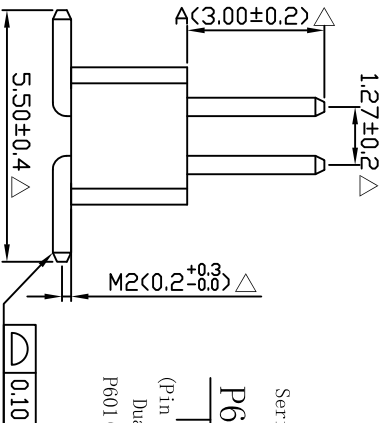

P.C.B. Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Insulator Material	: NY-6T/LCP, UL94V-0
Contact Material	: Copper Alloy
Finish	: Gold Plated
Standard	: Gold Flash all over

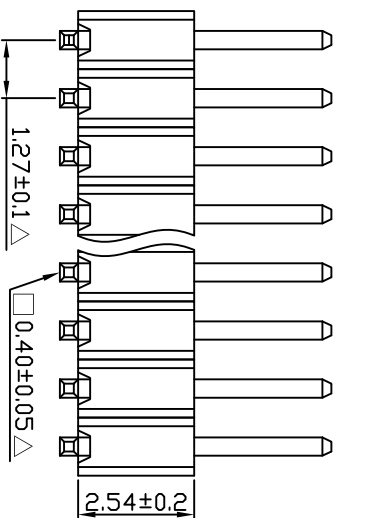

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P601	-	X	X	A	X X
(Pin Header Dual Row)	M: SMT Type	T: Tin Plated	N: Nylon-6T	A	(04 TO 100 Contacts)
P601 (H: 2.54mm)	M2: 0.2mm	A: 100" Gold	C: LCP	(030)	(If you desire on other length, by marking put desired in the A)
		B: 150" Gold			
		C: 200" Gold			
		©Duplex Plating			
		D: Gold Flash/Tin			
		(Standard: G)			

DESCRIPTION(内容):		DRAWN(製圖):		GENERAL TOLERANCE: (公差)		REV:	REV	DESCRIPTION	DATE
1.27mm Pin Header H:2.54 SMT □=0.40 (RoHS)		CHECKED(確認):		X: ±0.30 .X: ±0.20 .XX: ±0.15	X°: ±5.0° X°: ±4.0° .XX°: ±1.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2018.11.02
PART NO: P601-M2G_-030-XX		APPROVAL(核准):		SCALE(比例): 1:XX		SIZE: A4	2		
DWG NO(圖號):						SHEET 1/1	3		
							4		

东莞华连电子有限公司

A





B

C

D

E

FILE NO: CWJ-4E-09

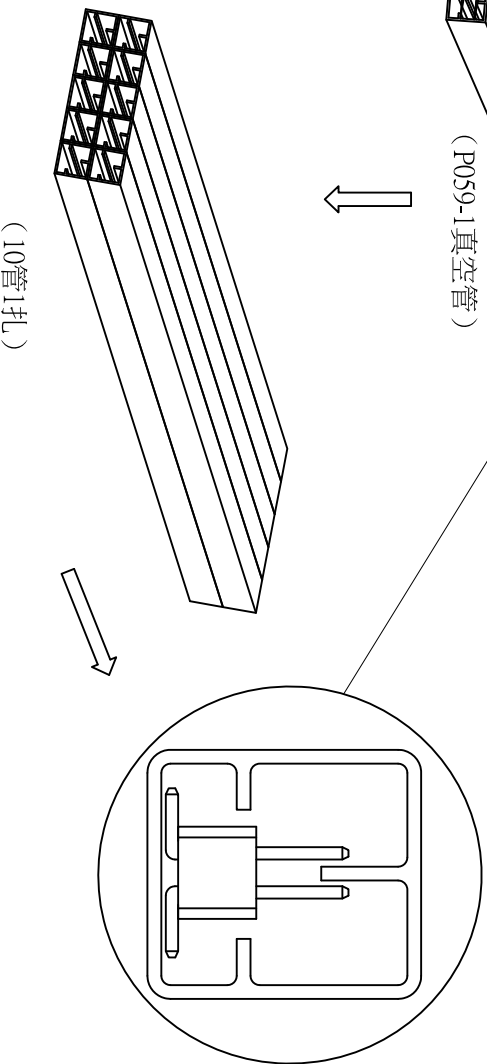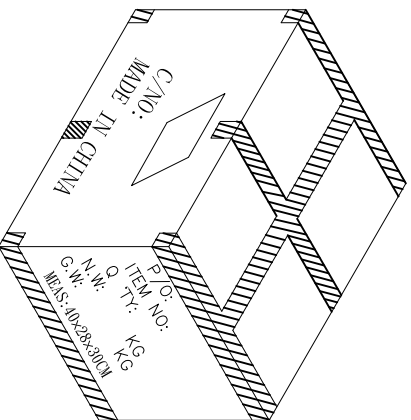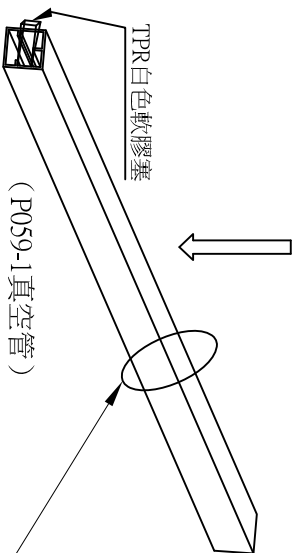

- 1.真空管規格：325x7.2x8.0mm(單重:17.44g)
2.外箱規格：40x28x30cm(單重:580g)
3.未夠一箱請酌量選箱進行包裝

PIN數	包材名稱	每管數量	PIN數	包材名稱	每管數量
			2*21	P059-1	11/PCS
2*2	PE袋+V017	1000/PCS	2*22	P059-1	10/PCS
2*3	PE袋+V017	1000/PCS	2*23	P059-1	10/PCS
2*4	P059-1	61/PCS	2*24	P059-1	9/PCS
2*5	P059-1	48/PCS	2*25	P059-1	9/PCS
2*6	P059-1	40/PCS	2*26	P059-1	9/PCS
2*7	P059-1	35/PCS	2*27	P059-1	9/PCS
2*8	P059-1	30/PCS	2*28	P059-1	8/PCS
2*9	P059-1	27/PCS	2*29	P059-1	8/PCS
2*10	P059-1	24/PCS	2*30	P059-1	8/PCS
2*11	P059-1	22/PCS	2*31	P059-1	7/PCS
2*12	P059-1	20/PCS	2*32	P059-1	7/PCS
2*13	P059-1	18/PCS	2*33	P059-1	7/PCS
2*14	P059-1	17/PCS	2*34	P059-1	7/PCS
2*15	P059-1	16/PCS	2*35	P059-1	7/PCS
2*16	P059-1	15/PCS	2*36	P059-1	6/PCS
2*17	P059-1	14/PCS	2*37	P059-1	6/PCS
2*18	P059-1	13/PCS	2*38	P059-1	6/PCS
2*19	P059-1	12/PCS	2*39	P059-1	6/PCS
2*20	P059-1	12/PCS	2*40	P059-1	6/PCS

DESCRIPTION(內容)		DRAWN(製圖)		GENERAL TOLERANCE: (公差)		REV: A/1		REV		DESCRIPTION		DATE	
1. 27mm Pin Header H:2.54 SMT □ =0.40 (環保材料)		黃炳秋		.X .XX .XXX .XXX .X° .X°		UNIT: A4		1				2022.01.19	
PART NO: (料號) P601-M2G_-030-XX(包裝圖)		CHECKED(確認):		SCALE(比例): 1:XX		SIZE: A4		2					
DWG NO(圖號):		APPROVAL(核准):		SHEET: 1/1		3		4					

东莞华连电子有限公司

A

B

C

D

E

FILE NO: CWJ-4E-09