

加油机配件 FUEL DISPENSER COMPONENTS

齿轮泵 GEAR PUMP

CTP5【齿轮泵】 GEAR PUMP


CTP5齿轮泵泵体材料：铝合金低压铸造；用于汽油、煤油、柴油等混合性燃油；泵体内置了油气分离器、止回阀、溢流阀、减压阀，进口过滤网和出口过滤网。

Supertech brand CTP5 Gear Pump, whose material of body is alloy aluminum founded under low pressure, is applicable to gasoline, kerosene, diesel oil and compound of them. Air Separator, by pass Valve, Check Valve, inlet and outlet strainer, decompression are built in.


技术说明Technical Specification

转速 Speed :	680~980rpm
流量Flow Rate:	45L/min~90L/min
真空度Vacuum:	$\leq -0.054\text{MPa}$
噪音Noise:	$\leq 72\text{dB}$
工作压力 Working Pressure:	0.18~0.3MPa
环境温度 Environment temperature	$-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$
包装Package :	1pc/carton
净重Net Weight	17kg
毛重Gross Weight:	17.5kg
包装尺寸Dimension:	360*320*300mm

结构Construction :

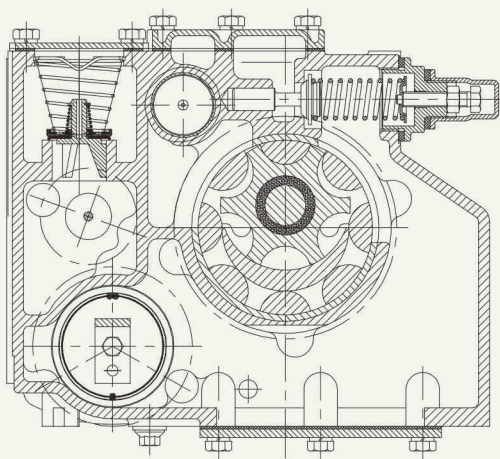

CTP5

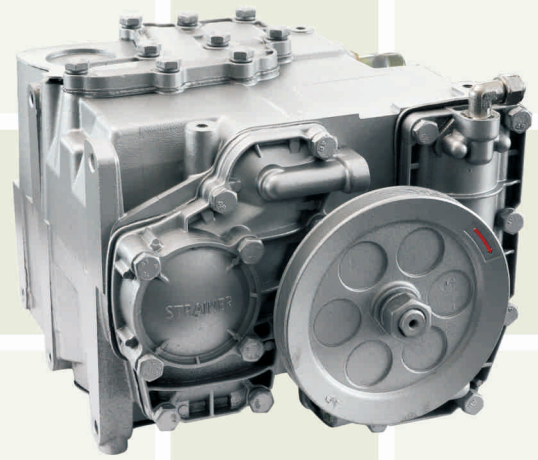

FM4 CTP5

