HAIFENG

Washer-extractors

XGQ series. Nine capacities for hotel linen, commercial laundries and on-premises textile care.

15-150

kg nominal capacity

Washing and spin extraction in one machine.

Explore the nine models



XGQ-50



Match the machine to the load.

Hotel linen

Separate sheets, towels and other linen into batches suited to their wash programs.

Commercial laundry

Match incoming loads and sorting needs to the capacity of the drying or finishing stage.


On-premises use

Allow for staff, working hours, daily volume and space for loading and servicing.

Daily output depends on batch size, cycle duration and handling time. Nominal capacity is the load per cycle, not hourly production.

Inside the XGQ-50

Variable-speed drive controls the motor through washing and extraction.

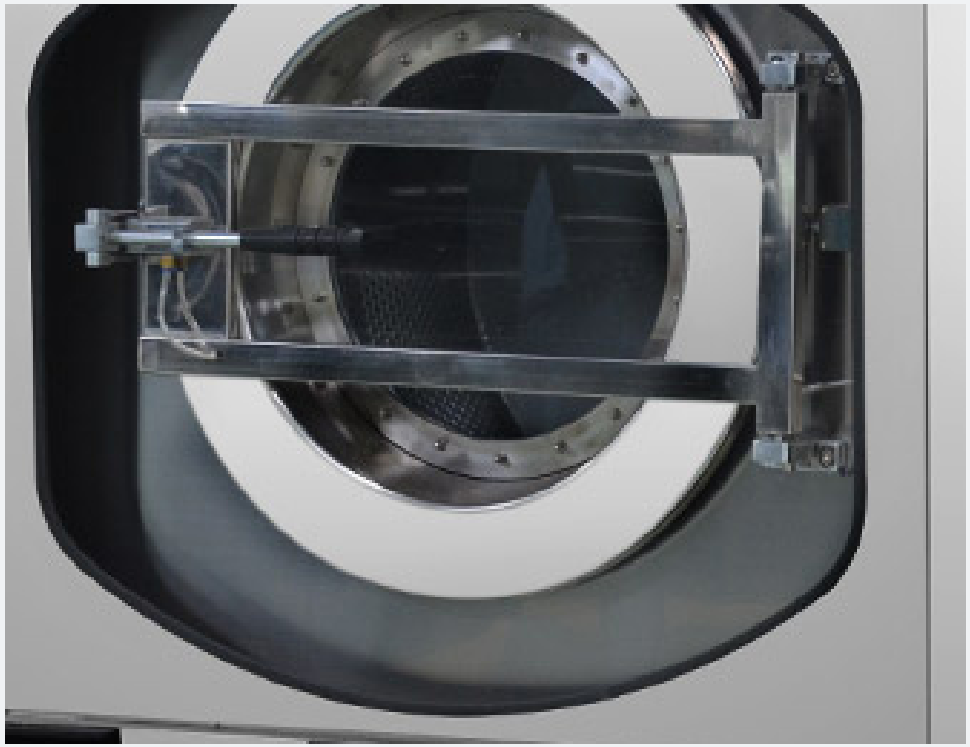

Front-loading door

Pneumatic locking and a safety interlock are described in the XGQ-50 manual. Provide the specified air supply.



Program control

Choose the program for the load. Specify the controller and language with the order; an English-only fascia can be requested.



Rear connections

Plan water, air and drainage before positioning the machine. Inlet arrangements and fitted equipment vary by model and configuration.

15-50 kg

XGQ washer-extractors

Model	XGQ-15	XGQ-20	XGQ-25	XGQ-30	XGQ-50
Nominal capacity (kg)	**15**	**20**	**25**	**30**	**50**
Drum diameter x depth (mm)	650 x 450	700 x 500	750 x 550	900 x 500	1080 x 600
Motor power (kW)	1.5	2.2	2.2	3.0	4.0
Washing speed (rpm)	40	40	40	38	30
Extraction speed (rpm)	920	900	900	800	750
Steam pressure (MPa)	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6
Overall dimensions (mm)	1120 x 1050 x 1550	1120 x 1100 x 1550	1160 x 1120 x 1800	1300 x 1300 x 1600	1540 x 1600 x 1820
Net weight (kg)	450	600	800	1200	1900

Motor power is not total electrical load. Include heating and auxiliaries when sizing the supply. Steam pressure applies to steam-heated versions.

Allow space beyond the machine dimensions for loading and service. Confirm the configuration and dimensions against the order drawing.

Source: Haifeng XGQ specification table.

70-150 kg

XGQ washer-extractors

Model	XGQ-70	XGQ-100	XGQ-120	XGQ-150
Nominal capacity (kg)	**70**	**100**	**120**	**150**
Drum diameter x depth (mm)	1080 x 720	1200 x 880	1300 x 885	1470 x 1000
Motor power (kW)	5.5	7.5	11	22
Washing speed (rpm)	30	30	30	30
Extraction speed (rpm)	750	650	630	600
Steam pressure (MPa)	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6
Overall dimensions (mm)	1540 x 1700 x 1820	1680 x 1900 x 2000	1765 x 1910 x 1950	1900 x 2200 x 2150
Net weight (kg)	2200	3000	3500	5500

Motor power is not total electrical load. Include heating and auxiliaries when sizing the supply. Steam pressure applies to steam-heated versions.

Allow space beyond the machine dimensions for loading and service. Confirm the configuration and dimensions against the order drawing.

Source: Haifeng XGQ specification table.

Prepare your laundry.

Confirm the selected configuration before arranging the site utilities.

Power 380 V / 3-phase / 50 Hz is listed as standard. Confirm other supplies for the selected model.

Heating Steam and electric options are documented. Confirm availability and the electric heater load.

Steam 0.4-0.6 MPa for steam-heated models.

Air supply Pneumatic doors need compressed air. The XGQ-50 manual specifies an 8 mm tube; confirm the supplied unit's pressure setting.

Water / drain Confirm inlet count, pipe sizes and water pressure. Shared drains must handle simultaneous discharge.

Site and service

Provide a solid, level foundation and service access. Use the final drawing to confirm floor loading and anchoring.

Qualified personnel should remove transport restraints, verify utilities, test interlocks and commission the machine.

Follow the supplied manual for filter, drainage, belt and lubrication checks.

Request a configuration

Send daily laundry weight, textile types, utilities and a floor plan. Include requirements for spare parts, training, commissioning and warranty terms.

haifengmachinery.com

Installation guidance: XGQ product notes and XGQ-50 manual. Follow the supplied machine manual.